## **dB**Technologies

## Tech specs selection

#### Acoustics

Speaker Type: 2-way active speaker HF compression driver: 1 " Exit

HF voice coil: 1"

LF: 10"

LF Voice Coil: 2"

Horizontal dispersion: 90° Vertical dispersion: 70°

#### Amplifier

Amp Technology: Custom made

Amp Class: Class-D + A/B- Active Fan cooling

RMS Power: 250 W

Operating voltage (factory set):

220-240V~ (50-60Hz) or 110-120V~ (50-60 Hz)

### www.dbtechnologies.com info@dbtechnologies-aeb.com

User interface

Controller: 24 bit

AD/DA Conversion: 48 kHz Limiter: Peak. RMS

Controls: Line/mic, Channel Volume, Link/Mix, Presets

Input / Output

Mains connections: VDE

Signal Inputs: 3 channels (Combo, XLR+trs, Bluetooth®)

Signal Out: (Balanced) 1x XLR OUT (LINK)

#### Mechanics

Housing: Polypropylene Handles: 2 (on sides) Width: 310 mm (12.2 in) Height: 530 mm (20.9 in) Depth: 299 mm (11.8 in)

Weight: 11.3 kg (24.9 lbs).

#### CHECK www.dbtechnologies.com FOR THE FULL TECH SPECS



#### Scan with your QR Reader App to download the complete User Manual

## POWER SUPPLY SPECIFICATIONS (POWER ABSORPTION)

Draw at 1/3 of full power in maximum use conditions (\*\*): 1.1 A (220-240V~) - 1.7 A (100-120V~)

\*\* INSTALLER NOTES: The values refer to 1/3 of full power, in heavy operating conditions (music program with frequent clipping or activation of the limiter). We recommend sizing according to these values in case of professional installations and tours.

Download the complete user manual from the site: www.dbtechnologies.com/EN/Downloads.aspx

#### **EMI CLASSIFICATION**

According to the standards EN 55032 and EN 55035 this equipment is designed and suitable to operate in class B electromagnetic environments

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth® SIG, Inc. and any use of such marks by AEB Industriale SRL is under license. Other Trademarks and trade names are those of their respective owner.


WARNING: Make sure that the loudspeaker is securely installed in a stable position to avoid any injuries or damages to persons or properties. For safety reasons do not place one loudspeaker on top of another without proper fastening systems. Before hanging the loudspeaker check all the components for damages, deformations, missing or damaged parts that may compromise safety during installation. If you use the loudspeakers outdoor avoid spots exposed to bad weather conditions.

Contact dB Technologies for accessories to be used with speakers. dBTechnologies will not accept any responsibility for damages caused by inappropriate accessories or additional devices.


Features, specification and appearance of products are subject to change without notice.

dBTechnologies reserves the right to make changes or improvements in design or manufacturing without assuming any obligation to change or improve products previously manufactured.

SYA 10 Rev 1.0 cod. 420120308Q



www.dbtechnologies.com info@dbtechnologies-aeb.com

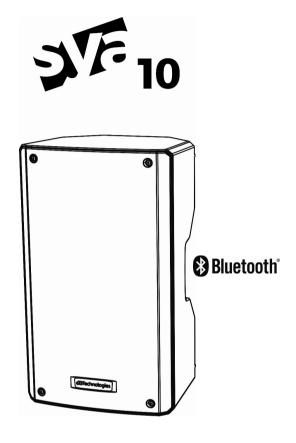

# Quick start user manual Section 1

CHECK www.dbtechnologies.com FOR THE LAST REVISION OF THIS DOCUMENT, FULL TECH SPECS, AND COMPLETE USER MANUAL

The warnings in this manual must be observed together with the "USER MANUAL - Section 2".

Le avvertenze nel presente manuale devono essere osservate congiuntamente al "MANUALE D'USO - Sezione2". Die Warnungen in diesem Handbuch müssen in Verbindung mit der "BEDIENUNGSANLEITUNG - Abschnitt 2" beobachtet werden".

Les avertissements specifiés dans ce manuel doivent être respectés ainsi que les "CARACTERISTIQUES TECHNIQUES -

Las advertencias del presente manual se deben tener en cuenta conjuntamente con las del "MANUAL DEL USUARIO" - Sección 2".



A.E.B. Industriale Srl Via Brodolini, 8 Località Crespellano 40053 VALSAMOGGIA BOLOGNA (ITALIA) Tel +39 051 969870 Fax +39 051 969725 www.dbtechnologies.com info@dbtechnologies-aeb.com



SYA 10 Rev 1.0 cod. 420120308Q

# **dB**Technologies

www.dbtechnologies.com info@dbtechnologies-aeb.com

## Thank you for choosing a dBTechnologies Product!

The SYA 10 is a versatile active speaker. It is equipped with one 1" compression driver (1" voice coil), and one 10" woofer (2" voice coil). The multiple input pattern allows an easy and versatile use. For example the user can connect a dynamic microphone (CH1), an independent source from a mixer (CH2), a Bluetoothe MP3 reader (CH3), controlling each volume level. The user can enhance lower and upper frequencies with the convenient DSP preset function. A balanced link output allows the audio connection to a second loudspeaker, choosing among "Mix" or "Line" output type.

Check the site www.dbtechnologies.com for the complete user manual!

#### 1) Unpacking

The box contains:


N°1 SYA 10

N°1 Mains cable (VDE)

This quick start and warranty documentation

### 2) Easy installation

SYA 10 is equipped with:



A – Lateral integrated handles B – Pole mount hole, with two tilt angles selection (0°/ 7.5°)

NEVER USE THE HANDLES TO SUSPEND THE SPEAKER!

Those mechanical particulars were thought for an easy use and for different configuration needs. SYA 10 is perfect for gigging bands as well as small venues installations. The 36 mm pole-mount predisposition is

SYA 10


designed for the use on standard pole stand (like a tripod).



The acoustical design allows to face different environments. The dispersion pattern is shown in the upper picture.

As described, the related pattern data are:

- a) vertical coverage: 90°
- b) horizontal coverage: 70°



The rear side inclination, symmetrical, as shown in the upper picture, is 45°. SYA10 can be used as a stage monitor in small contexts, in this case please consider the characteristic dispersion pattern presented above.

IT IS MANDATORY TO READ AND FULLY UNDERSTAND THE COMPLETE USER MANUAL FOR THE ADMITTED CONFIGURATIONS OF THE PRODUCT, SAFETY INFORMATION, AND THE PROPER USE OF ACCESSORIES (IF ANY).

Rev 1.0 cod. 420120308Q

**dB**Technologies

3) Connections, controls, first turn on

All the connections and controls are in the amplifier panel side:



 $\underline{www.dbtechnologies.com} \ in fo@dbtechnologies-aeb.com$ 

#### CH1

1-Audio Combo Input (for XLR or TRS connectors)

2-Line/Mic selector

3-Mic/Line Volume Control

#### CH2:

4-Audio Input (Balanced / TRS)

5-Line Volume control

CH3 (Bluetooth®):

6-BT status sync LED

7-BT Volume Control

MASTER SECTION

8-DSP Preset switch

9-Balanced audio output

10-Link/Mix switch

11-Master Volume with control LEDs

MAINS SECTION

12-VDE MAINS INPUT

13-ON-OFF SWITCH

a) Connect the audio input (1). The combo connector allows a TRS or XLR connection. In case of a dynamic microphone, plug it and select "Mic" in the Audio input sensitivity switch (2). In the other cases check that the switch is set on "Line". Adjust the level of Volume (3). b) Connect a second input, depending on the kind of connection (XLR/TRS), then adjust the related volume

c) If needed, enable with the switch (7) the Bluetoothereceiver. Pair it with a visible device (ex. a MP3 reader). If you need to link SYA 10 to another one, please use a cable with XLR connectors (not supplied). Connect the Link output (9) of the first, to the balanced Input (1) of the second one. In the second loudspeaker, please check that Selector (2) is set on "Line" position and that Volume (3) is set to the correct value.

e) Set properly the DSP preset switch (8), choosing between "Playback", "Flat", Bass Boost" or "Wedge" configuration.

e) Plug properly the mains VDE input cable (supplied) in the related input (12). Check that the audio source is set on the minimum level. Then switch the POWER switch (13) to "ON" position. Increase gradually the volume of the audio source to the desired level.

Check the site <a href="https://www.dbtechnologies.com">www.dbtechnologies.com</a> for further information, for added accessories and for the complete user manual!

SYA 10 Rev 1.0 cod. 420120308Q

## **dB**Technologies

www.dbtechnologies.com info@dbtechnologies-aeb.com

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by tuming the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

Warning: Changes or modifications to this unit not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

FCC Radiation Exposure Statement.

This equipment complied with FCC radiation exposure requirement. The device can be used in fixed/mobile(min20cm) exposure condition without restriction.