

→ 120.00 mm →



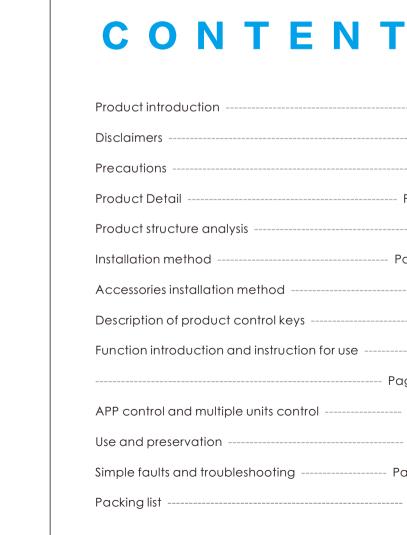

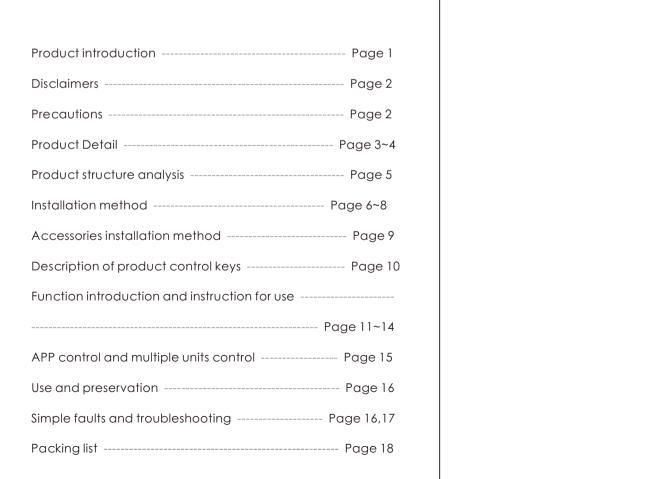

Welcome to use "GVM-680RS / GVM-880RS". This product is specially designed for senior photographers. The product usage scenarios are suitable for live broadcast/outdoor/studio photography, etc., and can also be used for YouTube video shooting. The main features of the product are:

- ① Infinitely adjustable RGB color and dual color temperature characteristics, brightness/color temperature RGB hue/color purity can be controlled at will, color temperature range 3200K~5600K. The use of high CRI LED lamp beads helps restore and enrich the color of the object, providing you with natural and vivid shooting effects. ② The APP intelligent control system can be controlled by your smart mob
 - ③ With LCD screen display and stable system, it supports 360° rotation, which can effectively control light. You can also install folding and soft light boar
- to avoid excess light, make the light softer, and customize the control fill light, allowing you to shoot the desired results easily and easily. 8 kinds of scene lights can be simulated: lightning, police car, candlelight
 TV, broken light bulb, party, disco, paparazzi.
- We firmly believe that the correct use of this product will definitely be
- help to your shooting work. It is strongly recommended that you read the following user guide carefully before using the product.

to reduce energy loss.

oduct correctly. If you don't obey the instructions and warnings, yo Product Name : Photography lights

Product Type : Photography Fill Light Product material : Aluminum alloy se to take full responsibility for the use of this product and possib Lamp beads quantity: 560

- Power supply: DC15V/4A
 Battery Capacity: 7.4V-4400mAh*2 (to be purchased separate
- Product Size (mm): 270*318*40

Cooling: Natural heat dissipation Commodity origin : China. Huizhou

Product model: GVM-880RSBrand: GVM

- ♦ Voltage : AC:100-240V♦ Power supply mode : DC input&Battery
 - Product Weight: 1.2 KG

Commodity origin : China. Huizhou

Product Name : Photography lights

Color temperature: 3200K~5600K

High color rendering index light beads, Upgrade LED scree

◆ SAT: 0%~100%

♦ Voltage : AC:100-240V

Power supply mode : DC input&Battery

Product Size (mm): 270*318*40

Cooling: Natural heat dissipation

- Product material : Aluminum alloy Lamp beads quantity: 752 ◆ Color rendering index : ≥97


Color temperature: 3200K~5600K

- Product Type : Photography Fill Light


◆ Hue: RGB 0~360°◆ SAT: 0%~100% Brightness: 11200lux/0.5m; 3600lux/1m Light adjustment method: Step-less adjustment Features / Features: RGB, SAT, APP, Joint control, Special light,

- Brightness: 8500lux/0.5m; 3000lux/1m
 Light adjustment method: Step-less adjustment
 Features / Features: RGB, SAT, APP, Joint control, Special light,
- Power supply: DC15V/4A Battery Capacity: 7.4V-4400mAh*2 (to be purchased separately


1 The lamp can be installed and fixed on the bracket by rotating the known clockwise, and unloaded by rotating in the counterclockwise direction

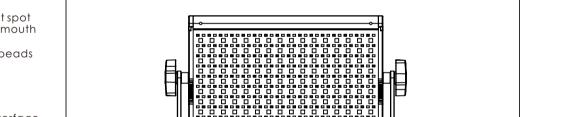

3 Loosen the adjustment knobs on both sides of the U-bracket, adjust the angle of the panel you need, and then tighten the adjustment knobs on both sides of the U-bracket.

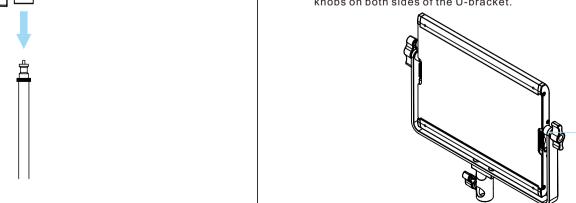

There are two power supply modes to choose. Connect the power cord and adapter for power supply. Purchase two other suitable lithium batteries and use them for power supply.(both battery cells must be plugged in to power)

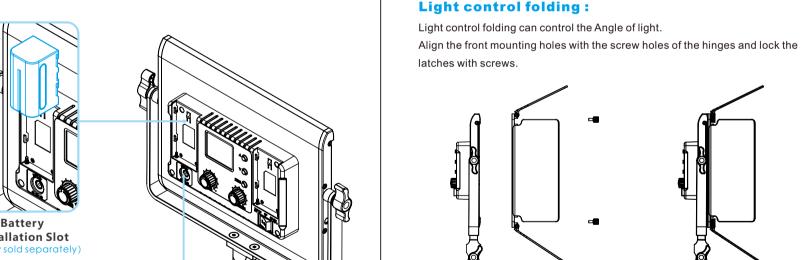



parameters of the current light mode.

seconds to enter/exit the scene mode; Spin the knob to adjust the

- Rotate, slave, master, APP 5 Brightness adjustment button: Adjust the brightness6 Multifunctional button: Press once to switch light mode. Press fo

The screen display the current brightness, control mode, light mode, light parameters, scene number, channel numerical, and battery power of the light.

Slave mode: The channel can only be adjusted through the lacktriangle and lacktriangle

buttons of the controller behind the light. When the channels of the slave and the master are the same, they can be synchronously controlled by

brightness, color temperature, hue, sat, scene, channel, and on/off of the

6 Adjust SAT: range 0%~100% • In Master mode / Rotate mode, short press the composite knob to switch

• In APP mode, connect to APP and adjust SAT through APP. CCT: Adjustable color temperature, range 3200K~5600K

SAT: Adjustable light color saturation, range 0%~100% car, ③Candlelight, ④TV, ⑤Bad light bulb, ⑥Party, ⑦Disco, ⑧f

scene No. ⑤, turn the compound knob to adjust the color temperature

when the current scene is scene No. ⑥ or ⑦, turn the compound knob to adjust the time. (Other scenes can only adjust the brightness).

• In the APP mode, connect to the APP and adjust the scene through the APP.

 In Master mode/Rotate mode, long press for 3 seconds and press the composite knob to enter/exit scene light (SC) mode. At this time, short press the composite knob to select scenes, all scenes can be adjusted by rotating the brightness adjustment knob; the current scene When it is ime, the connected APP mode machine can be controlled through the bbile phone APP, and the slave machine of the same channel as the




1 Sec 05-105	1 2 Channel	HA.E. 26%	
Channel 4000K	0%	BRG 100%	100%
((((((((((0%	SAT	100%

m. 2	10 0	2 2	
	1 0	Phenomenon	Check the product
1 L		The switch	① Check the matching power adapter indicator light up or not.
		does not light up	② When using lithium battery, make sure there's no "low

The product is in the "ON" state, the display and the display and the mobile phone the mobi

APP can't in APP mode and whether © Turn connect "BT_LED" is displayed on the



Carrying Case 1 1 1 1 1 1

Folding 1 2 3 1 2 3

Power cord 1 2 3 1 2 3

Rotate Slave Maste APP Adjust brightness (BRG): range 0%~100%
 In Master mode / Rotate mode, turn the brightness adjustment adjust the brightness.

• In APP mode, connect to APP and adjust brightness through A

HUE: Adjustable light color, range 0~360°

In Master mode/Slave mode, tap the plus/minus key to set the channel value.In APP mode, connect to APP and set the channel value through APP. • In Master mode / Rotate mode, short press the composite knob to

the light mode to CCT, and then turn the composite knob button to adjust

camera light. If there is a slave, you can also go through the APP Perform

others to Slave mode, and set the channel (CH) of the master and slav

annel can be synchronously controlled through the controller behir

Power: Make sure the power is in the demanded range, not too high or too low. Correctly load the battery, in order not the damage to machine.

Repairing: If there is fault or performance degradation, do not unpack the shell by

Accessories: Please use the accessories provided by manufacturer and approved ones, in order to maximize the performance.

Guarantee: Do does not modify the product, or you will lose the right of maintenance.

In the Master mode / Rotate mode, lightly press the compound knob button to switch to SAT, then turn the compound knob button to increase the color purity;

In WIFI mode, connect APP, adjust color pure SAT through APP.

Instructions 1 1 1 1 1 1