


Main Machine 1

Backup Battery
Supply Line

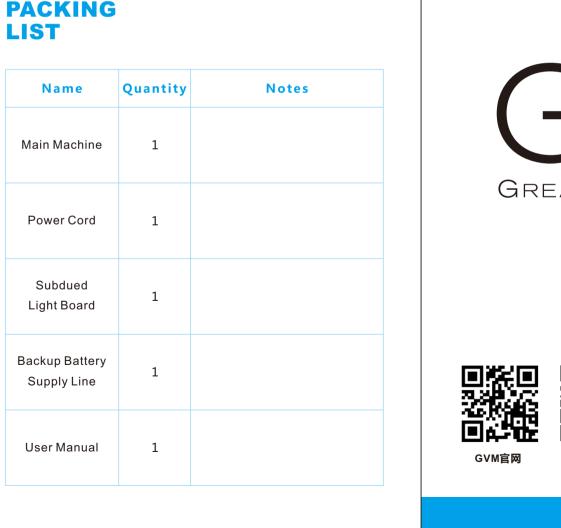

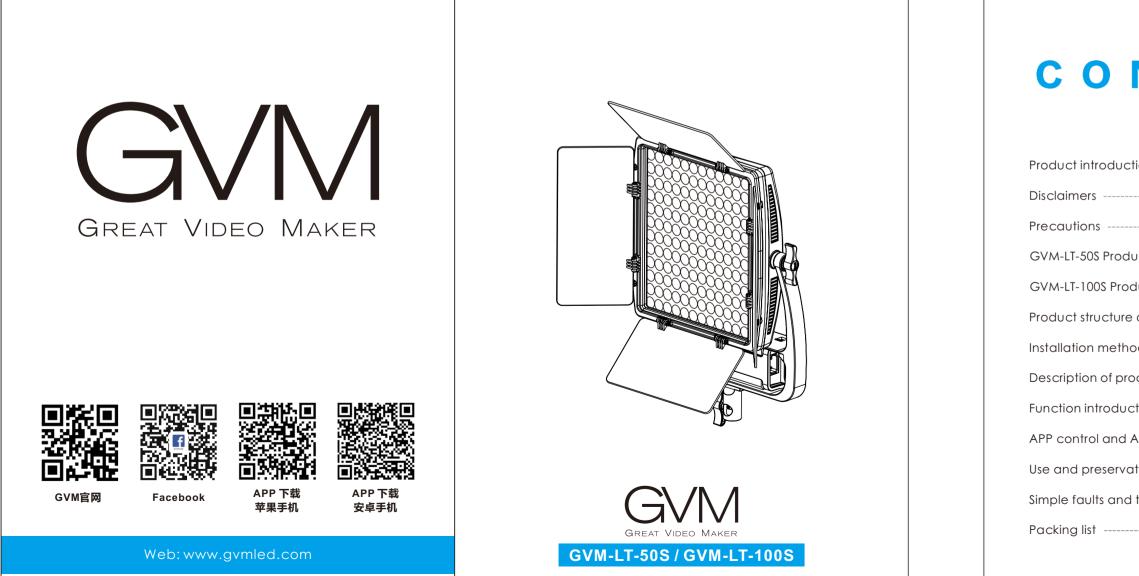

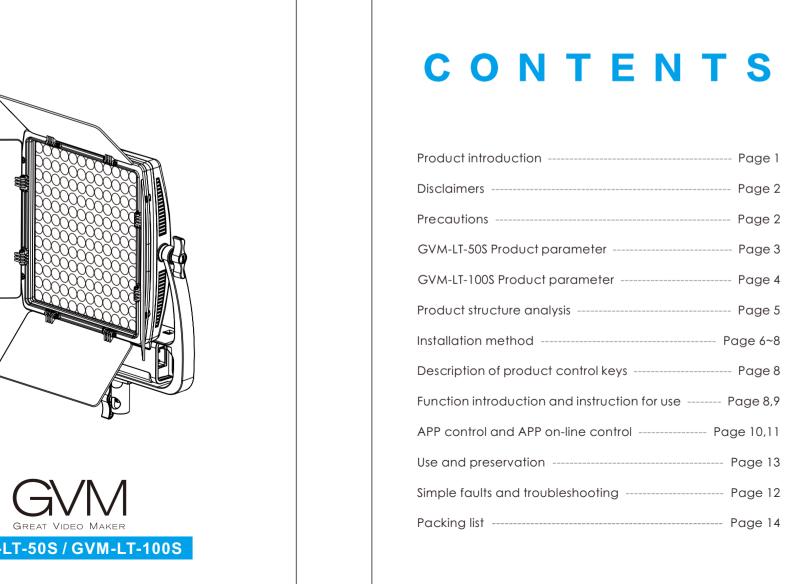

main features of the product are:

read the instructions below carefully.

use the product correctly. If you don't obey the instructions and warnings, yo Welcome to "Lens light series". This product is specially designed for seni maybe cause harm to yourself and the people around, or even damage the photography lovers. The product is suitable for live broadcast / outdoor / studio photography, etc. It can also be used for YouTube video shooting. The  $\,$ Once you use this product, you are deemed to have read the disclaimer and warning carefully, understand and acknowledge all the terms and contents of this statement, and promise to take full responsibility for the use of this product and possible

L. Before using this product, please read the instructions carefully and make sure

① Steplessly adjustable dual color temperature characteristics, and the color temperature range is 3200K ~ 5600K. Has 144 LED bulbs, helps to restore and enrich the color of the object. It is equipped with high-quality lens and has strong focusing ability, providing you with natural and vivid shooting

② APP intelligent control system, which can be controlled by your smart mobile

③ Equipped with cooling fan for fast cooling.

④ it has LCD screen and stable system, allowing 360° rotation, with four leaf specification to power the product. Do not use power adapter with baffle, to control the light effectively, avoiding of redundant light, custom

control the fill light, in order to get the desired results in a casual way. We believe that once using our product correctly, you can make huge progress 3 The product is not anti-corrosion, therefore do not let the product tou when shooting. Before using the product, you are strongly recommended to

from falling and damage.

to reduce energy loss.

- When using the product, make sure the product is put firmly and prevent Battery capacity: No battery provided

Product Name : Photography lights

Product Type : Photography Fill Light

Color temperature: 3200K~5600K

Light adjustment method : Stepless adjustment

Product Weight: 2.2KG Product Size ( mm ): 406\*318\*70 Cooling: Fan heat dissipation

Power: 50W

- (5) If the product will not be used for a long time, please switch off the power Commodity origin : China. Huizhou

• Features / Features : APP, Joint control, High color rendering index

◆ Color rendering index : ≥97

Light adjustment method : Stepless adjustment

- Product material : Plastic

◆ Color rendering index : ≥97

Lamp beads quantity: 144

Color temperature: 3200K~5600K

Brightness: 18000lux/0.5m, 6500lux/1m

Product model: GVM-LT-50S

• Features / Features : APP, Joint control, High color rendering inde

Brightness: 29000lux/0.5m, 9000lux/1m

- Voltage: AC:100-240V/DC:15V Power supply: DC15V/4A

# Product model: GVM-LT-100S

Brand: GVM Product Name : Photography lights

Product Type : Photography Fill Light

Indicator light —

Power interface —

Lamp beads quantity: 144

Product Weight: 2.7KG

Power: 100W

Voltage: AC:100-240V/DC:15V

Power supply: DC15V/7A

Power supply mode : Adapter&Battery


Battery capacity: No battery provided

Commodity origin : China. Huizhou

Product Size ( mm ): 406\*318\*70 Cooling: Fan+Aluminum heat sink heat dissipation

- Product material : Plastic
- Power supply mode : Adapter&Battery

clockwise, and unloaded by rotating in the counterclockwise direction

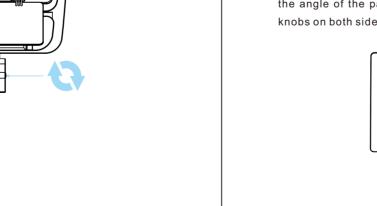

# 1 The lamp can be installed and fixed on the bracket by rotating the kno

3 Loosen the adjustment knobs on both sides of the U-bracket, adjust the angle of the panel you need, and then tighten the adjustmen knobs on both sides of the U-bracket.

2 Insert the Subdued light board from the top of the light panel

① Connecting lamp and adapter. Plug in the adapter power cord for power ② Plug in the battery, connect the lamp and the D-TAP port of the batte with the battery connection line, and use the battery to supply powe 1 DC15V power input interface 2 Power switch 3 Mode button/WIFI reset button: Modes include host mode and slave mode; WIFI username and password reset button 4 Channel addition and subtraction key: adjust channel (0~11) 6 Brightness indicator: when adjust the brightness knob, the indicator 6 Color temperature indicator: when adjust the color temperature knob,

4 There are two power supply modes to choose from:

In the host mode, brightness can be adjusted by rotating brightness level knob

switch (default master mode for startup

channel values can be set.

7 Nixie tube: show value including lightness, color temperature and

8 Brightness adjustment button: adjust the brightness (10%~99%) Olor temperature adjustment button: adjust the color (3200K~5600K

The mode is divided into master mode and slave mode. Tap the mode key to

MODE: Master: Adjust brightness, color temperature and channel thro knobs and buttons, and can also connect APP. These parameters of lar can be controlled through APP, and slave computers of the same channel can be controlled synchronously by adjusting the brightness and color can also be adjusted synchronously.

MODE:Slave: Brightness and color temperature cannot be adjusted, only

MODE:Slave: Brightness and color temperature cannot be adjusted, only

Host mode: when the brightness is adjusted by brightness level knob o

APP, the brightness indicator light is on and the color temperature

temperature adjusting knob or APP, the color temperature indicator wil

It is able to reset the WIFI username and password if long press the button for over 5 seconds. After resetting, the username and the passy

turn to the initial (WIFI username: GVM\_LED, WIFI password: gvm\_admi

light ( WIFI initial username: GVM\_LED, password: gvm\_admin ), once it shows successfully connected GVM\_LED", return back to the main interface,

after it shows "double color temperature LED light ( successfully connected )" in the main interface, it is allowed to control the lightness, color temperature channel value or switch on and off through the control key in APP, and also

high temperature environment. If not use the product for a long time, disconnect th

power and take out the battery. Clean: Before clean, disconnect the power plug. And use wet cloth rather than any

load the battery, in order not the damage to machine.

Repairing: If there is fault or performance degradation, do not unpack the shell be

① Check the matching power adapter is well contacted with indicator light up or not. the power plug not light up ② When using lithium battery, make Charge the battery sure there's no "low power" before using it

The knob of Check if the mode were set as slave Press the "mode" lightness and mode, lightness and color temperature button for once, switch

olor temperature of the products cannot be controlled the mode from slave

when the Check if the product is "switch off" Press the "ON/OFF"

yourself, avoiding damage the machine and lose the right of maintenance. When ther is fault, do not hesitate to contact us, and we will do our best to deal the problem.