

# SmallRig



## Vibe P96L RGB Video Light

User Manual

In order to ensure user's safety and prevent the product damages caused by any improper use, please carefully read the "Warnings" below and properly keep this User Manual for future reference.

## Foreword

Thank you for purchasing SmallRig's product.

## Warnings

- Please read this User Manual carefully.
- Do not use the product in water because it is not dust or water proof.
- Do not let the product fall to the ground, be hit or suffer violent impact.
- Do not exert pressure on its OLED screen because overpressure will cause permanent damage to the screen.
- Do not use the product in the completely closed environment, or it may lead to rise of internal temperature, which causes product failure, ignition or other accident.
- Do not look straight at the LED bead in use from close range, or it may cause visual impairment.
- Do not place the product nearby any combustible or volatile solution, or it may cause a fire disaster or smog.
- Be sure to power the product off when it is not in use.
- Please don't store the LED light into the portable bag immediately after using. The residual heat may accident the LED lamp beads. Please wait for the LED light cool down sufficiently before storing.
- Never remove the non-detachable lithium battery without permission.
- When the battery is not in use for a long time, please charge and discharge the battery each 6-month, and provide it with approximately 60% of the electric quantity to prolong its use life.
- Since there are some hazardous substances in the battery, please do not discard it. Instead, dispose of the product that is damaged or will never be used according to the waste management measures.
- It is not recommended to use the LED while charging. It will cause rapid heat generation, the product will work improperly or automatically power off.



**Please do not disassemble the product or change its battery. If you have any question, please contact the seller to apply after-sales service.**

## Intended Use

- Please read this User Manual carefully, especially the "Warnings".
- Please use or store the product in the environment mentioned herein.
- It will be regarded as an improper use when the users are not correctly follow the user manual or use the product under the specific working condition.

## Features

The is a compact and powerful light source for still and video photography. It uses the latest in flicker-free LED technology, making it more efficient and durable. The Light features:

- Long-life, Low-Heat LEDs
- Long-life Built-In lithium battery
- Adjustable brightness and color temperature
- Full 0-360° color hue and saturation adjustment

## Package List

The package includes the following items:



Vibe P96L RGB Video Light  
× 1




USB-C Charging  
Cable × 1



User Manual  
× 1

## Product Instructions

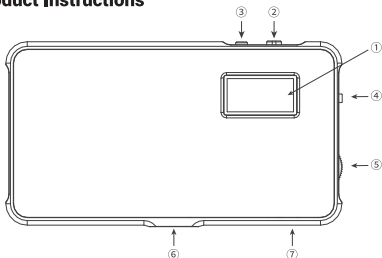

① OLED Display

② Power Switch

③ Mode Button


④ Select / Adjustment Knob

⑤ Brightness Knob

⑥ 1/4"-20 Thread

⑦ USB-C Charging Port

## OLED Display



⑨ Estimated Time Remaining

⑩ Battery Capacity

⑪ Mode Selected(CCT/HSI/Effect)

⑫ Color Temperature Display (CCT)

⑬ Brightness Display (CCT)

⑭ Color Hue (HSI)

⑮ Color Saturation (HSI)

⑯ Scenario Effect Group(Effect)

⑰ Effect Name(Effect)

## Power ON / OFF

To turn the product on, face the OLED screen, and turn the power switch to the right to light the screen.


To turn the product off, face the OLED screen, and turn the power switch to the left to turn off the screen.

## Mode Selection

Press Mode button to change mode between CCT / HSI / EFFECT.


### CCT Mode

1. Turn Brightness knob to set the desired brightness level from 1% ~ 100%.
2. Turn Set / Adjustment Knob to set the desired color temperature from 2500K ~ 8000K.




### HSI Mode

1. Press Select / Adjustment Knob to select between H(Hue) and S(Saturation).
2. Turn Select / Adjustment Knob to set the desired Color Hue from 0 ~ 360°
3. Turn Select / Adjustment Knob to set the desired Color Saturation from 0 ~ 100.
4. Turn Brightness knob to set the desired brightness level from 1% ~ 100%.



### EFFECT Mode

1. Press Select / Adjustment Knob to select Scenario Effect Group from A-G.
2. Turn Select / Adjustment Knob to set the desired Scenario Effect, Each group has 3 different effects and will display the effect name on OLED.
3. Turn Brightness knob to set the desired brightness level from 1% ~ 100%.



## Scenario Effect List

Group A: Flash / Flash Fast / TV screen

Group B: Candle / Flame 1 / Flame 2

Group C: Police / Ambulance / Fire truck

Group D: Strobe Lights 1 / Strobe Lights 2 / Strobe Lights 3

Group E: Chase slow / Chase mid / Chase fast

Group F: Firework 1 / Firework 2 / Firework 3

Group G: Club 1 / Club 2 / Romantic

## Cold Shoe Adapter Installation

1. Align the Cold Shoe Adapter with the threaded lug on .
2. Turn the lock screw clockwise to attach the Adapter to the Light.

## Mounting on a Camera / Cold Shoe / Light Stand

1. Turn off the LED Light.
2. Slide the Cold Shoe adapter into a camera hot shoe or cold shoe mount.
3. Turn the locking ring clockwise to secure the adapter.

## Charging the Will Charge From 5V USB-C Input.

1. Attach the appropriate cable to the Light.
2. Attach the cable to a power source.
3. The OLED display will display flashing battery icon while being charged.
4. Charging time varies depending on power source.

## Tech Specs

Max. Power	6.5W
Color Model	0 ~ 360° full color control (HSI)
Brightness Range	1% ~ 100%
Color Temperature	2500K ~ 8000K
Max. Brightness / Illuminance	CCT 960lm (100% 8000K) HSI R200lm 450lm B70lm (H=100%, L=100%)
Color Rendering Index	≥96
Battery Specification	1500mAh / 3.7V / 5.55Wh
Working Temperature	-10°C ~ 40°C
Input	5V = 1A USB-C
Dimension	110.2 × 60.8 × 11.5mm
Weight	117g

## Notes on Temperature Warning

1. Product is used in an environment with a high ambient temperature, or if the product is used continuously for a long period of time. This will automatically
2. turn of the product until it cools down.  
Product is used in an environment with a low ambient temperature. In such environments, the product may not operate properly.

## Service Warranty

---

Please keep your original receipt and guarantee card. Be sure the dealer has written on it the date of purchase and SN of the product. These are required for warranty service.

### After-sale warranty terms:

1. 7 Days DOA Return Policy: Within 7 days from the date of the package receipt, return or replacement can be done if the item received is malfunctioning or physical damaged (not caused by human abused), return shipping cost will be on SmallRig's charge.
2. SmallRig products are entitled to warranty services as of the date of payment.
  - Electronic products: 1-year warranty, 1-year free warranty service.
  - Non-electronic products: 2-year warranty, 2-year free warranty service.

**Note: In case of any conflict between our warranty period policy and applicable laws and regulations of the country/region where the products are sold, the latter shall prevail.**

### This warranty does not cover:

1. Defect caused by users' violation of the "Warnings" and "Intended Use".
2. The product identification or SN label is removed or defaced in any way.
3. Product damage caused by problems not attributable to the quality of the products such as improper use of the products.
4. Product damage caused by unauthorized modification, disassembly, repair and other acts.
5. Product damage caused by fires, floods, lightning and other force majeure factors.

### Warranty Mode:

For the products within the scope of warranty, SmallRig will repair or replace them on the basis of specific failures; the repaired/replaced products/parts are entitled to the remaining part of the original warranty period.

### Contact Information:

•You're advised to contact the online customer service personnel of corresponding shopping platform and submit a repair service application.

•You may also apply for repair service through SmallRig's service email.

Service Email: [support@smallrig.com](mailto:support@smallrig.com)

For more support information: [www.smallrig.com/support](http://www.smallrig.com/support)

## Guarantee Card

ID No.	
Item Name	
Purchase Date	
User Name	
Mobile	
Address	
Receipt	



Prolinx GmbH  
Brehmstr.56,40239 Duesseldorf Germany  
eu@eulinx.eu



Prolinx Global LTD  
27 Old Gloucester Street London, WC1N3AX, UK  
eu@eulinx.eu

Manufacturer: Shenzhen Leqi Network Technology Co., Ltd.  
Add: Rooms 103, 501 and 601, Building 5, Fenghe Industrial Park,  
Nos. 1301-50 Guanguang Road, Longhua District, Shenzhen,  
Guangdong, China.

Consignor: Shenzhen LC Co., Ltd  
Add: Rooms 602, Building 5, Fenghe Industrial Park, No. 1301-50  
Guanguang Road, Xinlan Community, Guanlan Street, Longhua  
District, Shenzhen, Guangdong, China.

**CE RoHS FCC**



[www.smallrig.com](http://www.smallrig.com)

Made in China