

### SAFETY INFORMATION

To clean the GEMINI, wipe with a clean, dry, non-abrasive cloth only.

Weight (including Yoke, not including accessories): 10.9 kg [24 lb]

Dimensions (including Yoke, not including accessories): W = 74.8 cm [29.4 in], H = 52.9 cm [20.8 in], D = 17.6 cm [6.9 in]

Do not restrict air flow around the GEMINI. Keep the fixture's air intakes and air exhaust space clear of obstruction.

Plug the GEMINI into a mains electrical outlet using only a provided AC powerCON Power Cable or one specified by Litepanels®. Protect the cable from pinching, twisting, or crushing. Use a mains electrical outlet that is grounded and rated for 100-240VAC, 50/60Hz only.

Do not use, mount, transport, or store the GEMINI near radiators, space heaters, ovens, stoves, heat registers, open flame, or any heat source, or in an environment with an ambient temperature greater than 65°C [149° F].

The GEMINI is suitable for operation only in an environment as follows: ambient air temperature between -20°C and 45°C [between -4°F and 113°F]; less than 85% relative humidity (RH), no condensation. Use in a dry environment; do not place on a wet surface or submerge the GEMINI in liquid.


**WARNING:** Tampering with or disassembling the GEMINI may result in electric shock and will void the manufacturer's warranty.

**WARNING:** To reduce the risk of electric shock or fire, do not expose the GEMINI to rain, moisture, or liquids.

Immediately consult with qualified Litepanels® service personnel if any of the following have occurred: The fixture has been dropped or impacted; the power cable has been damaged; the fixture has been exposed to rain, moisture, or liquid; or the fixture does not operate normally.



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

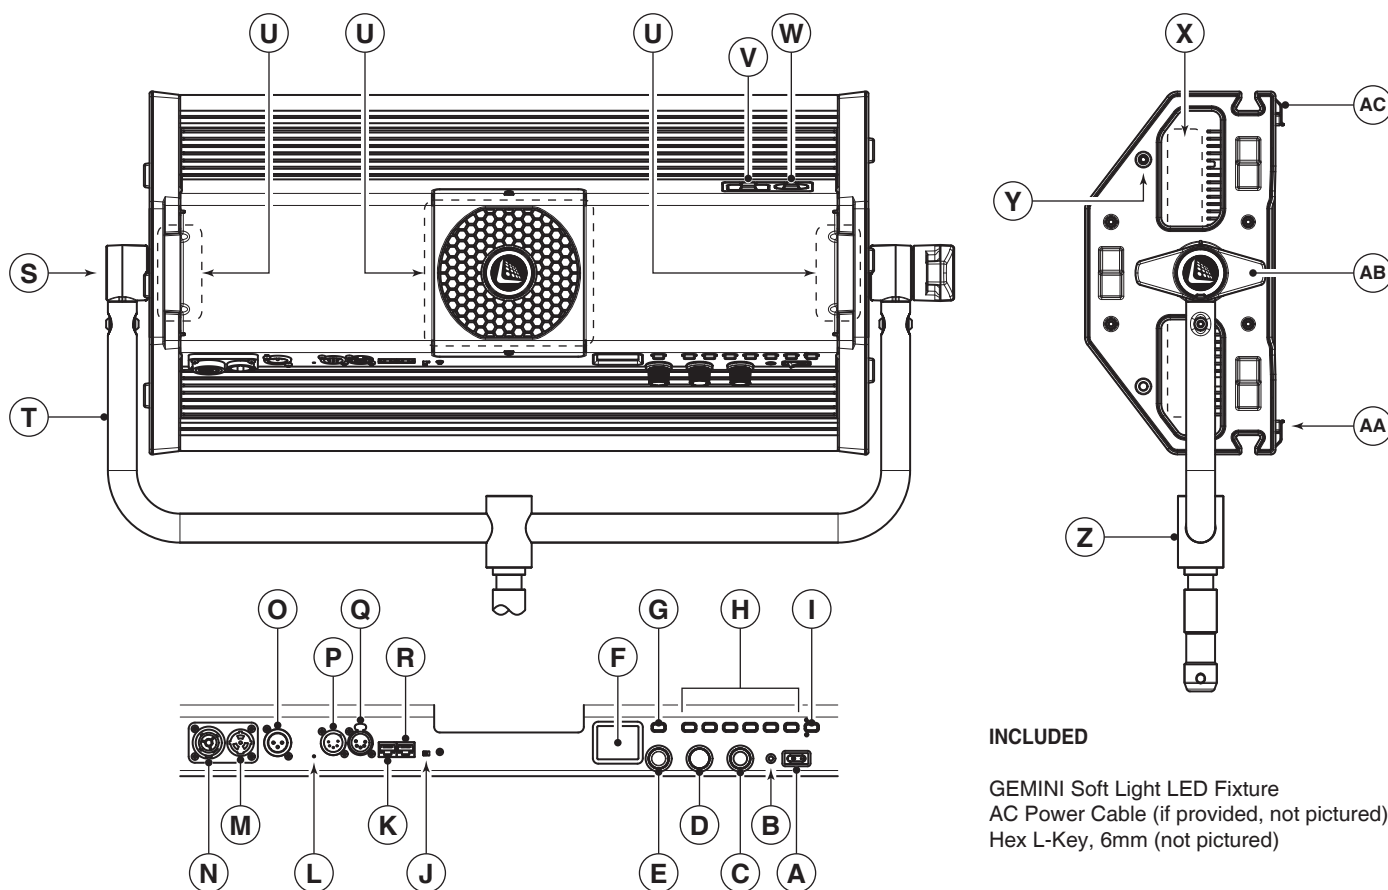

### INCLUDED

GEMINI Soft Light LED Fixture  
AC Power Cable (if provided, not pictured)  
Hex L-Key, 6mm (not pictured)

- (A) ON / OFF SWITCH
- (B) POWER / STATUS INDICATOR LIGHT
- (C) DIMMER / INTENSITY KNOB
- (D) CCT / SATURATION KNOB
- (E) GREEN OFFSET / HUE / MENU KNOB
- (F) DISPLAY
- (G) CANCEL BUTTON
- (H) PRESET BUTTONS (6X)
- (I) PRESET TOGGLE BUTTON
- (J) DMX TERMINATION SWITCH

- (K) RJ45 DMX / MASTER/SLAVE INPUT
- (L) ACTIVE COMMS INDICATOR LIGHT
- (M) MAINS AC POWER THROUGH
- (N) MAINS AC POWER INPUT
- (O) 3-PIN XLR DC POWER INPUT
- (P) 5-PIN XLR DMX / MASTER/SLAVE INPUT
- (Q) 5-PIN XLR DMX / MASTER/SLAVE OUTPUT
- (R) RJ45 DMX / MASTER/SLAVE OUTPUT
- (S) YOKE BOLT
- (T) YOKE

- (U) AIR INTAKE
- (V) USB PORT
- (W) BLUETOOTH® / WIRELESS DMX PORT
- (X) AIR EXHAUST SPACE
- (Y) 1/4-20 FEMALE THREAD (2X)
- (Z) JUNIOR PIN
- (AA) ACCESSORY LATCH (2X)
- (AB) YOKE KNOB
- (AC) ACCESSORY RAIL (2X)