



Lume cube RGB Panel Pro 2.0 RGB Video Light Instruction Manual

[Home](#) » [Lume cube](#) » Lume cube RGB Panel Pro 2.0 RGB Video Light Instruction Manual 



RGB Panel Pro 2.0 RGB Video Light
Instruction Manual



Contents

- [1 RGB Panel Pro 2.0 RGB Video Light](#)
- [2 Product specification](#)
- [3 Standard items](#)
- [4 Interface Function Description:](#)
- [5 Operating Instructions](#)
- [6 Warranty card](#)
- [7 FCC Statement:](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)

RGB Panel Pro 2.0 RGB Video Light

Manual carefully and carefully before use, and keep this manual for future reference after reading.

Warning

1. Please keep dry, do not touch the product with wet hands, and do not expose the product Do not immerse the product in water or expose it to rain.
2. This product is not waterproof, please pay attention to the rain and wet environment Waterproof.
3. Please place it out of the reach of children.
4. Built-in lithium battery, do not disassemble, hit, squeeze or put into the fire. Do not disassemble, hit, squeeze or put into fire.
5. Do not use in flammable gas, violation of this warning may cause violation of this warning may cause an explosion or fire.
6. Do not use, store or charge in a hot environment or in a closed space under direct sunlight. Do not use, store or charge in a hot environment or in a closed space under direct sunlight.
7. Please use the special charger for charging and follow the operating instructions correctly, and use within the specified voltage and temperature range.
8. This product involves batteries, please strictly follow the corresponding operating instructions regarding the use of batteries. Otherwise, it may lead to explosion or fire.

Caution

1. After charging is completed, the power cord should be unplugged.
2. After not using the product for a long time, before using the product again, you should the power will be fully charged, otherwise it may lead to no power and can not be turned on. The machine.
3. In order to extend the service life of the battery, it is recommended that every three months once a charge maintenance.
4. This product has a built-in rechargeable lithium battery, which has a certain life limit. After a certain period of use, the performance will be weakened, which is a normal phenomenon.

Product specification


1. Product name: RGB portable tube light
2. Product Model: Tube Light Mini

3. Body material: aluminum alloy
4. Charging time: about 2.5 hours
5. Built-in lithium battery: DC7.4V 2500mAh
6. Rated power: 10W
7. RGB color gamut: 0-360 ° full color
8. Color temperature range: 2700K-7500K
9. Color rendering: Ra>96+ 10.
10. Dimming range: 0-100%
11. Number of lamp beads: 124
12. Battery life: 100% 7500K power continuous output of about 1.7 hours
13. Ambient temperature: -10 ~ 35 degrees,
Storage temperature -5 ~ 45 degrees.
Charging temperature 0~45 degrees
14. Charging interface: Type-C
15. Charging power: 5V2A
16. Fixed interface: 2 general 1/4" nuts
17. Product size: Φ39 mm, length 313 mm
18. Net weight: about 350g


Standard items

- Tube light: 1pcs
- USB charging cable: 1 pcs
- Instruction manual: 1 copy
- Small tripod: 1 pcs

Part Name

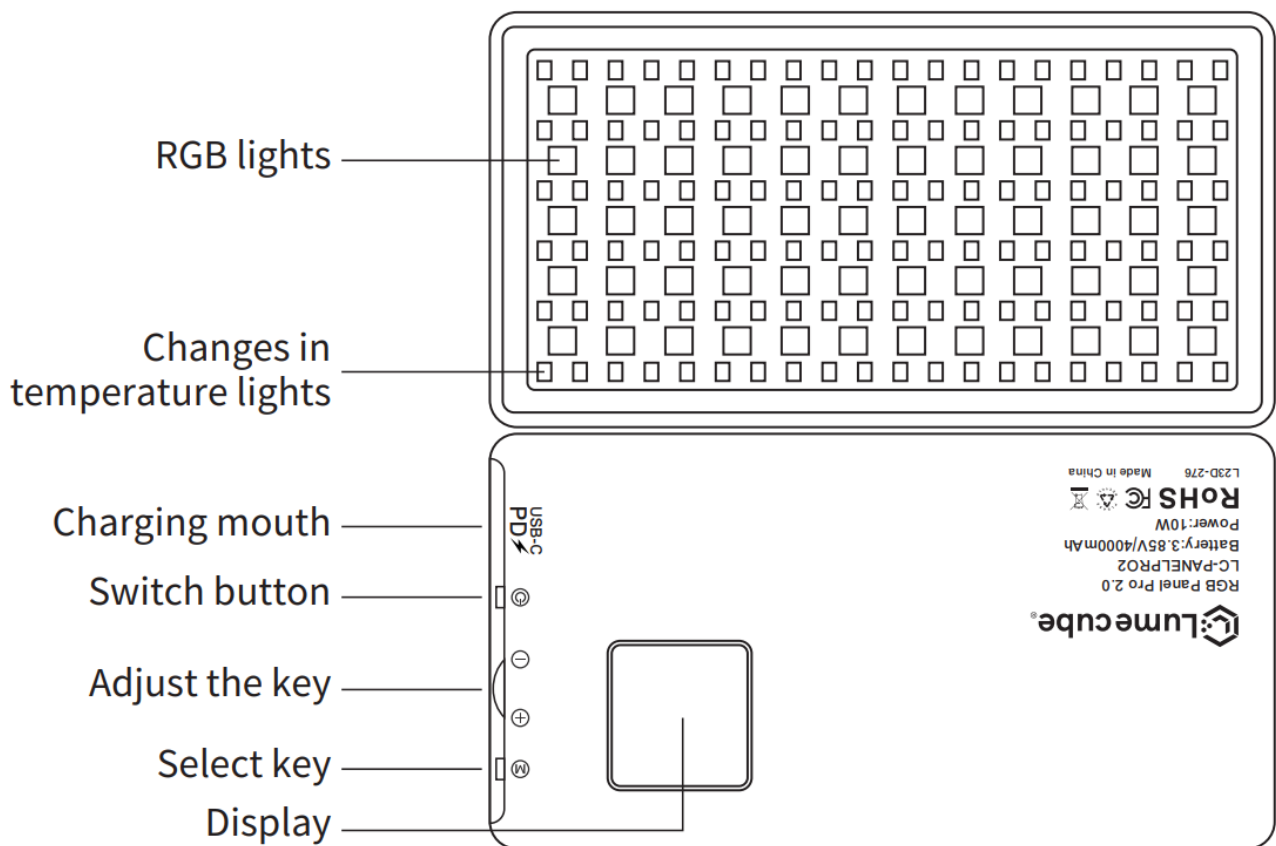

Interface Icons

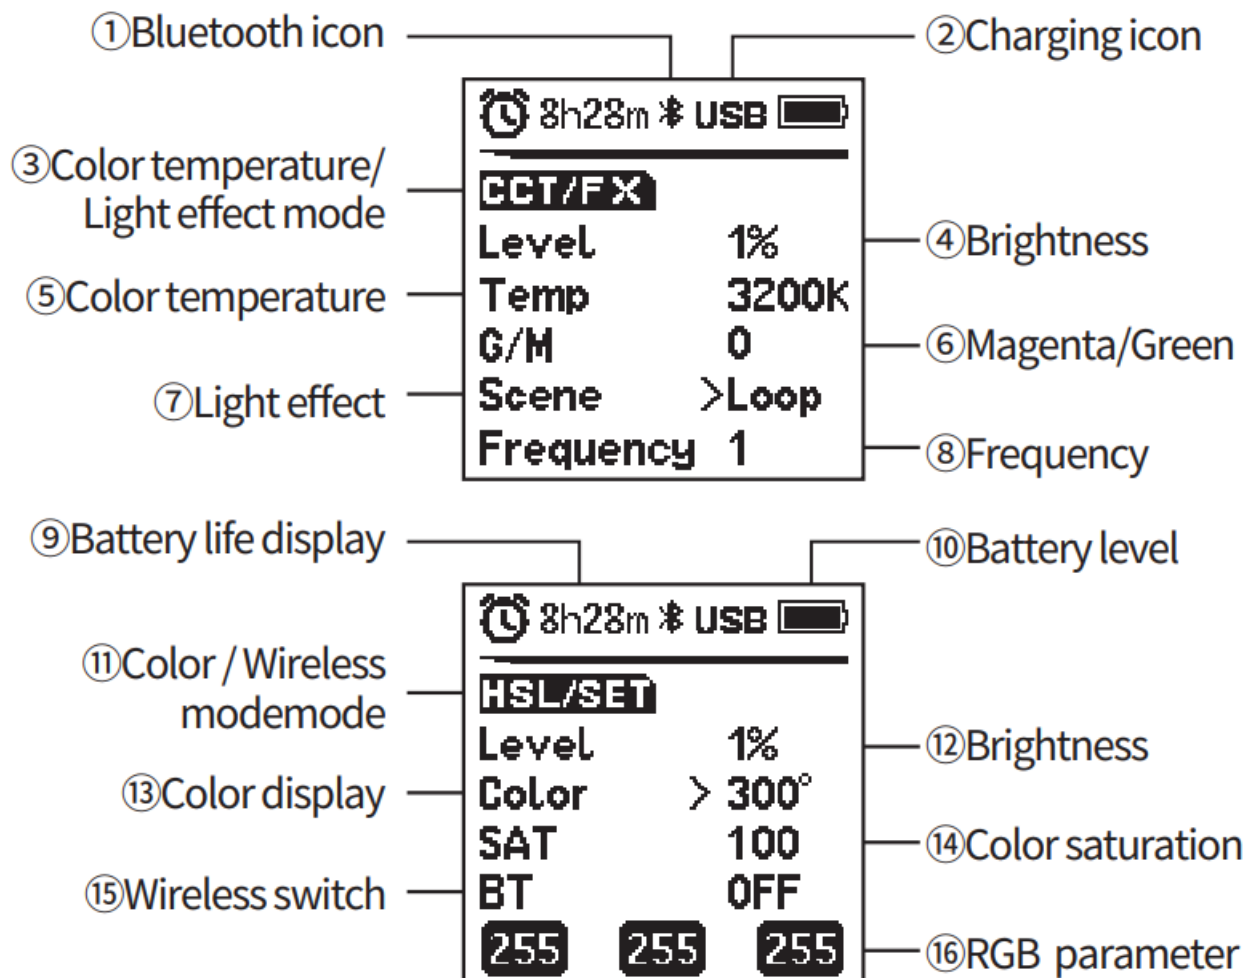

Interface Function Description:

1. Brightness: display the current brightness percentage, 0~100% adjustable.
2. Color temperature: display the current color temperature value, 3200K~7500K adjustable.
3. Magenta / green: display the current magenta / green value, -1 ~ 1 adjustable.
4. Color display: display the current color value, 0 ° ~ 360 ° full color adjustable.
5. Color saturation: display the current saturation, 1~100 adjustable.
6. Light effect: display the current light simulation effect, 6 kinds of light effect can be selected.
7. Frequency: display the current light flashing frequency, 1 ~ 10 adjustable.
8. Wireless: show whether it's under the current wireless control mode.
9. Power:
 - a. Display the current power.
 - b. When the high temperature power icon will display "HOT" high temperature warning, when using the environment temperature is too high or continuous use for a long time, it will high temperature warning sign will appear, at this time continue to use will be forced to turn off the light or turn off the output power, wait for the temperature to recover and reboot.
 - c. The charging icon will be displayed when charging.
 - d. The 100 icon will be displayed when charging is full.

Operating Instructions

Turn on/off the power:

Toggle the power switch to turn the power on or off.

Color temperature mode CCT:

1. After turning on the LED light, press the M key, the interface  is color temperature adjustment mode.
Press the M button again, the icon  will change to CCT, the selection icon  appears, selection icon to point to , at this time, toggle the dial button to adjust 0~100% brightness value.
2. Press the M button, select the  icon pointing to , then dial to adjust the 2700k~7500k color temperature value.
3. Press the M button, select the icon  pointing to G/M, at this time, dial to adjust -1~1, G/M value.
4. Press the M button, CCT icon is converted to icon , then dial to change to the next mode.

Color mode HSL.

1. With the icon displaying the previous mode , dial to select the  color mode, press the M button, the icon  changes to SHL, and at the same time the selection icon appears .
At the same time, the selection icon  appears, select the icon pointing to, at this time, dial to adjust 0 ~ 100% brightness value.
2. Press the M button, select the icon  pointing to H, at this time, dial the button to adjust 0 ° ~ 360 ° full color function.
3. Press the M button, select the icon  pointing to S, at this time, dial the key to adjust 0~100 color saturation function.
4. Press the M button, SHL icon converted to icon , then dial to switch to the next mode.

Light effect mode FX:

1. In the icon shows the previous mode **HSL** dial the button, select the light effect mode **FX**, press the M button again, the icon **FX** turns to FX icon, while the selection icon  appears, select the icon  pointing to , then dial to adjust 0 ~ 100% brightness value.
2. Press the M button, select the icon pointing to , at this time the dial can choose six different light simulation effects, OFF to turn off the light simulation effects.

The 6 light effect modes are as follows:

- 1: Loop mode
 - 2: Lightning mode
 - 3: Flame mode
 - 4: Candlelight mode
 - 5: Police car mode
 - 6: Screen mode
3. Press the M button, select the icon  pointing to , then dial to adjust the light 1 ~ 10 flashing frequency function, OFF for off the light light frequency.
 4. Press the M button again, the FX icon is converted to icon **FX**, then dial to switch to the next mode.

Wireless mode SET:

1. Toggle the dial under the icon to display the previous mode **FX**, select **SET** wireless mode, press the M button again, the icon turns to **SET** icon, while the selection icon  appears, the selection icon points to , then dial to turn on or off the wireless function.

Warranty card

Dear users, in order to better serve you, please fill out this warranty card carefully after purchasing the product, so that we can serve you in the future. Please keep the warranty card properly after purchase, this warranty card is an important proof of warranty service, thank you!

User Information	Product Name(Model)	
	User's Name	
	Contact Number	
	Mailing Address	
	Purchase Date	
Distributor Information	Name	
	Address	
	Contact Number	
	Sales Date	
	Confirmation of the Seller's Stamp	

Warranty Service Terms

1. The product warranty of one year, the built-in battery warranty of six months.
2. Warranty from the date of first purchase of the product, the date of purchase to purchase the product warranty card registration date shall prevail.
3. Quality problems require warranty, please send this warranty card, the purchase receipt and the product together to the dealer or factory for maintenance service.

Warranty Exclusions

1. The product or parts are out of warranty.
2. Warranty card or valid proof of purchase cannot be provided.
3. Failure or damage caused by not using according to the instructions.
4. Failure or damage caused by improper handling, dropping, or shipping.
5. Failure or damage caused by contact or exposure to improper temperature, solvent, acid or alkali, water immersion or Humidity caused by the failure or damage.
6. Failure or damage caused by unauthorized repair, disassembly, or alteration by the user.
7. Failure or damage caused by force majeure or accident.
8. Other non-quality problems caused by the failure or damage.
9. Failure or damage caused by the use of power or voltage other than those specified.

Product appearance in the process of use scratching, decolonization, wear and tear, consumption not within the scope of the warranty; due to improper use caused The company has nothing to do with the damage or economic loss caused by improper use.

FCC Statement:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and

2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment ent. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.



Documents / Resources

 RGB Video Light RGB Panel Pro 2.0 Instructions for Use 	Lume cube RGB Panel Pro 2.0 RGB Video Light [pdf] Instruction Manual 2A792-LC-PANELPRO, 2A792LCPANELPRO, RGB Panel Pro 2.0 RGB Video Light, RGB Panel Pro 2.0, RGB Video Light, Video Light, Light
--	--