
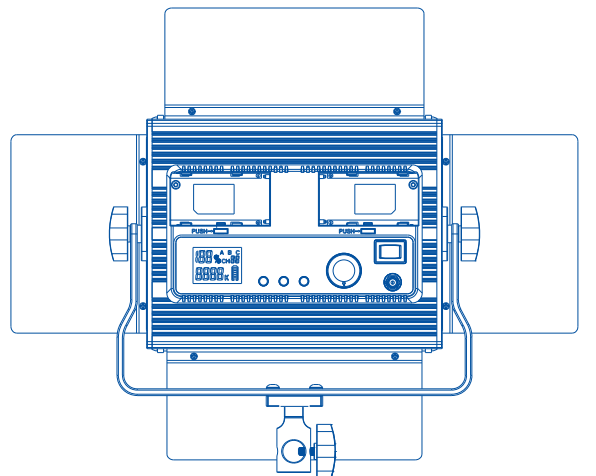



Phottix Kali50

Instruction Manual

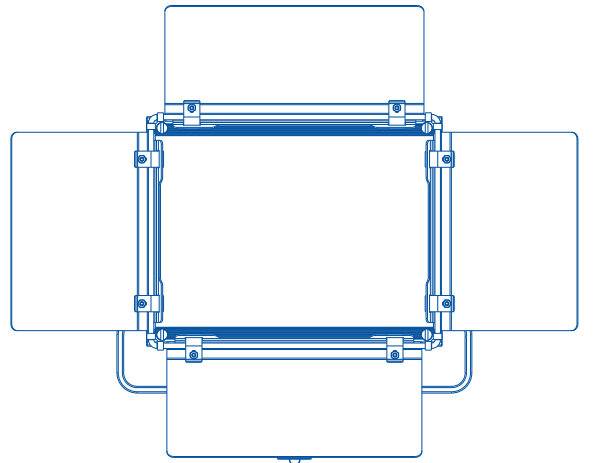

Features

The Phottix Kali50 Video LED is a compact and powerful light source for still and video photography. It uses the latest in Flicker-free LED technology, making it more efficient and durable.

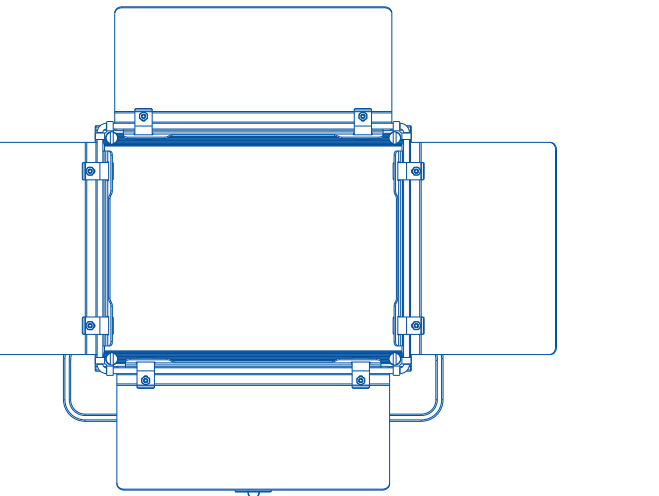


The Kali50 features:

- 50W of power
- Long-life, Low-Heat LEDs
- Durable one-piece aviation-spec Aluminum shell
- Battery / AC Power Modes
- Adjustable brightness and color temperature
- 2.4G Wireless remote control

Please note:

- Do not shine the LED directly at people's eyes at short distances. This can cause short-term vision issues. Use at distances of at least 1m from subject – or use a reflector/diffuser to soften the light.
- Do not place the LED close to alcohol or flammable objects.
- Do not place liquids on or near the LED. The product is not water, splash or dust resistant.
- Use a soft cloth and neutral cleaner to clean the LED light.
- Do not use strong cleaning agents or solvents such as thinner gasoline or alcohol to clean the LED light.
- Do not store the LED at temperatures of +40C as high temperatures may damage the product components.
- Do not use the LED in outdoors in direct sunlight for an extended period of time to prevent the product from overheating and possible damage.


Parts

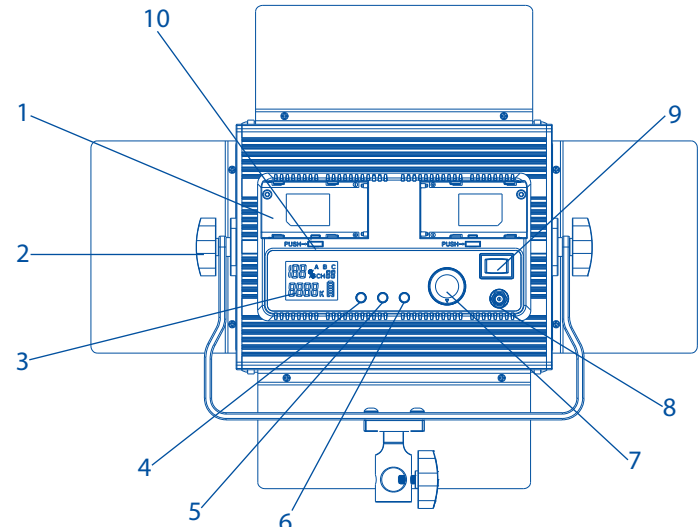

1. Battery Ports
2. Locking Nuts
3. LCD Display
4. Brightness Button
5. Color Temperature Button
6. Channel / Group Button (CH/Grp)
7. Adjustment Dial
8. AC Adapter Port
9. Power / Battery / AC modes Switch
10. Battery Release Button

Wireless Remote

1. LCD
2. Channel / Group button (CH/Grp)
3. ON/OFF button
4. + / - Adjustment Buttons
5. Set Button

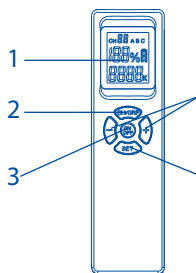

Mounting and Adjusting the Kali50

1. Use the Mounting Bracket to mount the Kali50 to a Light Stand or other mount. Ensure the Mounting Bracket Locking Nut is securely fastened.
2. Loosen and tighten the Locking Nuts on the Mounting Bracket to adjust the Kali50 angle.

To use NP-style Batteries.

1. Align the battery with the Battery Port
2. Push the battery until locked into position.
3. Move the Power / Battery / AC Modes Switch to the Battery position.

Please Note:

The Kali50 will operate with 2 pcs NP-F750 or NP-F960 batteries being used only.

Removing Batteries

Push the battery release button and remove battery from the Kali50's battery chamber.

Using AC Power

1. Connect the AC Adapter to the AC Adapter Port on the Kali50
2. Plug the other end of the AC Adapter into mains power.
3. Move the Power / Battery / AC Modes Switch to the AC position.

Power OFF Kali50

Move the Power / Battery / AC Modes Switch to the Center position.

The LCD Display

On the Kali50 LCD Display

- Brightness displayed from 01-100%.
- Color Temperature is displayed from 3200K-5600K.
- Channel (CH) from 01-40
- Group A/B/C
- The estimated remaining battery power is indicated by the battery icon.

Adjusting Brightness and Temperature

1. Press the Brightness button and turn the Adjustment Dial to adjust output from 01–100%.
2. Press the Color temperature button and turn the Adjustment Dial to adjust color temperature from 3200K-5600K.

Using the Barn doors

The Barn doors included with the Kali50 are very useful in control and shaping light.

Setting the Group on the Kali50

1. Press the Channel Button (CH/Grp) on Kali50.
2. Use the Adjustment Dial to set the group between A/B/C.

Setting the Wireless Channel on the Kali50

1. Press the Channel Button (CH/Grp) twice on Kali50.
2. Use the Adjustment Dial to set the Channel from 01–40.

Please note:

The Channel and Group on the Remote and Kali50 needs to be the same for the remote to control the Kali50.

Using the Remote Control

The Phottix Kali50 comes with wireless remote control. Using this remote, Kali50 can be controlled from up to 50m away.

Install Batteries on Remote control

1. Slide out back side cover.
2. Insert 2pcs AAA batteries.

Power ON/OFF the Remote control

Hold 1sec ON/OFF button on Remote Control to power ON/OFF the Remote Control.

Adjusting Brightness on Remote control

Press the + / - buttons to direct adjust output from 01–100%.

Adjusting Color Temperature on Remote control

1. Press the Set button
2. Press the + / - buttons to adjust color temperature from 3200K-5600K.
3. Press the ON/OFF button to confirm and exit.

Remote ON/OFF Kali50 on Remote control

1. Press ON/OFF button on Remote Control to remote ON/OFF the Kali50.
2. LCD will display OFF on both Kali50 and remote control when remote Kali50 to OFF.

Setting the Group on the Remote Control

1. Press the CH/Grp Button to enter group setting.
2. Using the + / - buttons to select the group between A/B/C
3. Press the ON/OFF button to confirm and exit.

Setting the Wireless Channel on the Remote Control

1. Press the CH/Grp Button twice to enter channel setting.
2. Set the Channel from 01-40 using the + / - buttons
3. Press the ON/OFF button to confirm and exit.

Tech Specs

Kali50

Color temperature:	3200K - 5600K
Brightness range:	01% - 100%
Max. brightness / illuminance:	1800Lux @ 1m
Max.Power:	50W
Color rendering index:	CRI 96+/TLCI 98+
Input power AC/DC adaptor operation voltage:	100-240VAC
Battery operation:	NP-F750 or NP-F960 battery x2
LED quantity:	300pcs Cool + 300pcs Warm
Dimension:	274mm x 64mm x 259mm
Weight:	1180g (not include battery)

Remote Control

Remote Control:	40 channels 2.4G wireless remote control
Remote Control Range:	<50m
Battery operation:	AAA x 2

What's included:

1. Kali50 LED Panel
2. Remote control
3. AC Adapter
4. EU plug
5. US plug
6. UK plug
7. SAA plug

Warranty Card

Phottix offers warranty service and / or replacements that comply with local regulations.

For full information see: phottix.com/warranty



Keep this card - DO NOT LOSE.

Phottix.com




Printed in China

Phottix Kali50 使用說明書

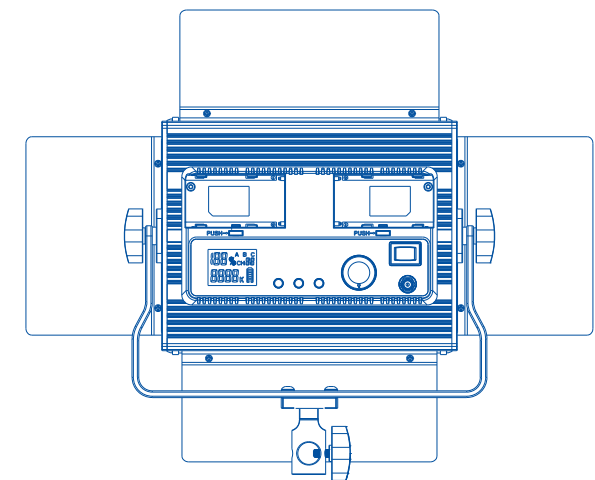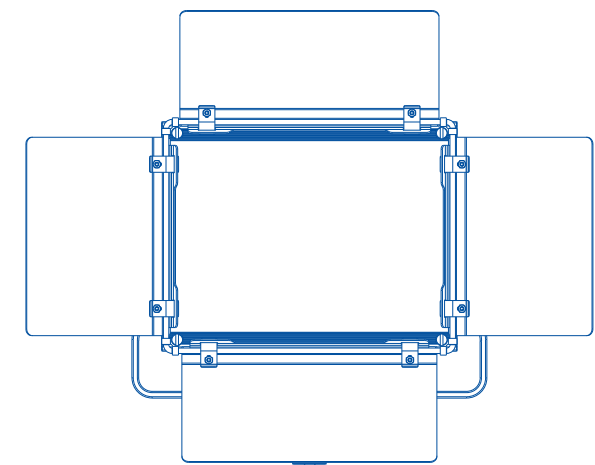

產品特點

Phottix Kali50 Video LED可以成為輕巧並實用的光源，以供攝影或攝錄使用。

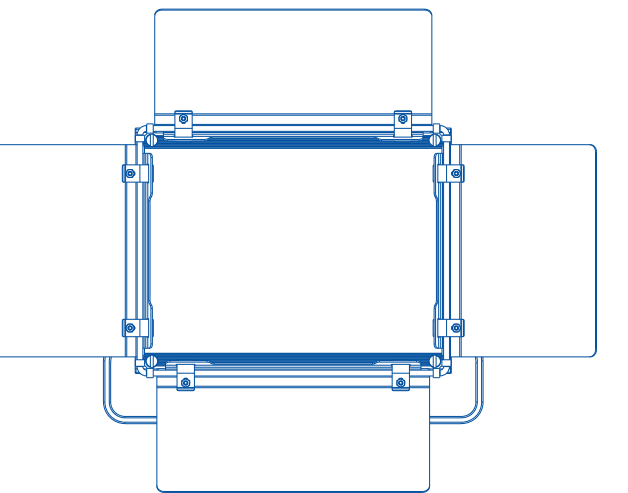

其主要功能包括：


- 50W大功率
- 耐用鋁材外殼
- 可用電池或交流電源轉接器供電
- 亮度及色溫調節
- 2.4G無線遙控

注意事項：

- 不要用LED近距離向人眼照射，否則可能會短暫影響視力，建議在1米外使用，或考慮使用柔光罩
- 不要將本產品放置於酒精或易燃物品附近
- 本產品並不防水或防塵，不要將本產品放置於液體附近
- 如把本產品連接於相機上使用，不要用本產品作支撐點提起相機
- 請用軟布及中性清潔劑清潔本產品
- 請將本產品在40度以下存放及使用，特別在長時間在戶外被陽光照射下使用時需要特別注意

部件名稱


背面

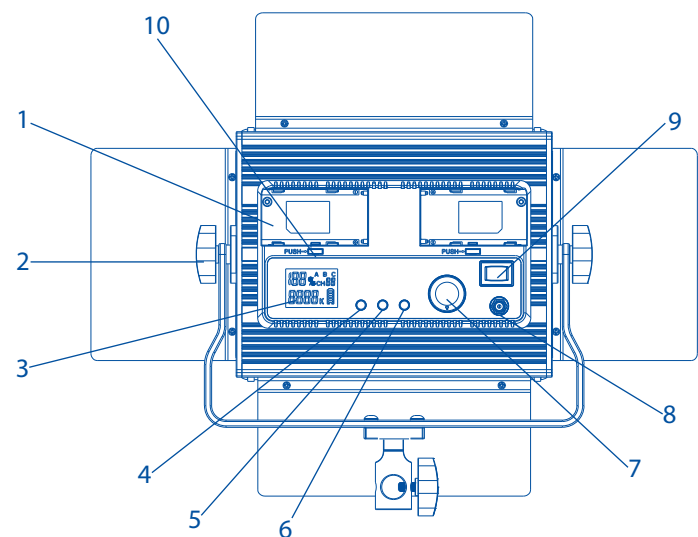

- 1. 電池倉
- 2. 支架固定旋鈕
- 3. LED 顯示屏
- 4. 亮度按鍵
- 5. 色溫按鍵
- 6. 頻道 /組別按鍵 (CH/Grp)
- 7. 調整轉輪
- 8. DC插座
- 9. 電源開關選擇
- 10. 電池固定鎖

無線遙控

- 1. LCD顯示屏
- 2. 頻道 /組別按鍵 (CH/Grp)
- 3. ON/OFF按鍵
- 4. + / - 調整鍵
- 5. 設定鍵 (SET)

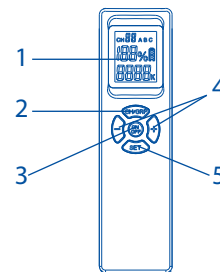

將本產品安裝在燈架上使用

用本產品的支架可將本產品固定在燈架上，請確保固定旋鈕鎖緊於燈架上避免掉落

使用NP電池供電

1. 將兩顆索尼NP-F系列的電池卡入到電池倉內
2. 將電池推進電池倉。
3. 將電源開關撥動到電池端，即可使用電池供電及開啟LED

註：本產品需安裝兩顆NP-F750或NP-F960電池才可以使用

移除電池

按下電池固定鎖並將電池推出

使用外接電源

1. 將外置電源轉接器插入電源插孔
2. 將電源轉接器另一端連接電源插頭
3. 將電源開關撥動到AC端，即可使用適配器供電及開啟LED

關機

在開機狀態下，將電源開關撥動到中間端關機

LCD顯示屏

Kali50顯示屏顯示

- 亮度顯示由01-100%
- 色溫顯示由3200K-5600K
- 頻道CH01-40
- 組別A/B/C
- 電池電量估計資訊

調整亮度及色溫

1. 按下亮度按鍵後轉動調整轉輪，調節亮度由01-100%
2. 按下色溫按鍵後轉動調整轉輪，調節色溫由3200K-5600K

使用擋光板

用適中的力度調整擋光板至合適角度

在Kali50上設置組別

1. 在Kali50按下 頻道 /組別按鍵 (CH/Grp)
2. 轉動調整轉輪選擇組別A/B/C

在Kali50上設置頻道

1. 在Kali50按下 頻道 /組別按鍵 (CH/Grp) 兩次
2. 轉動調整轉輪選擇組別頻道01-40

註：Kali50主機跟遙控器的頻道和組別必須一樣才可遙控

使用遙控器

本產品附有遙控器，可在50米以內遙控Kali50

安裝遙控器電池

1. 拉出遙控器背部後蓋
2. 安裝兩顆AAA電池

開關遙控器電源

長按遙控器上ON/OFF 按鍵1秒開啟或關閉遙控器電源

使用遙控器調節亮度

使用遙控器上的 + / -調整鍵 可直接遙控Kali50亮度01-100%

使用遙控器調節色溫

1. 按下遙控器的 設定鍵 (SET)
2. 使用 + / -調整鍵直接可遙控Kali50色溫3200K-5600K
3. 按下ON/OFF 按鍵 確認及退出

使用遙控器開關Kali50主機

1. 使用ON/OFF 按鍵可直接遙控Kali50主機開關
2. Kali50主機以及遙控器上的LCD 顯示屏會顯示OFF狀態

在遙控器上設置組別

1. 在遙控器按下 頻道 /組別按鍵 (CH/Grp)
2. 使用遙控器上的 + / -調整鍵 選擇設置組別A/B/C
3. 按下ON/OFF 按鍵 確認及退出

在遙控器上設置頻道

1. 在遙控器按下 頻道 /組別按鍵 (CH/Grp) 兩次
2. 使用遙控器上的 + / -調整鍵 選擇設置頻道01-40
3. 按下ON/OFF 按鍵 確認及退出

技術規格

Kali50主機

色溫範圍:	3200K - 5600K
調光範圍:	01% - 100%
最大照度:	1800Lux @ 1m
最大功率:	50W
顯色指數	CRI 96+/TLCI 98+
外置電源轉接器電源輸入:	100-240VAC
電池種類:	NP-F750 or NP-F960 x 2
LED 數量:	300pcs 暖色 + 300pcs 冷色
產品尺寸:	274mm x 64mm x 259mm
產品淨重:	1180g

遙控器

40頻道 2.4G 無線遙控	
遙控距離:	50m
電池:	AAA x 2

配件包含：

- | | |
|----------------|-----------|
| 1. Kali50補光燈本體 | 5. 插頭(美規) |
| 2. 遙控器 | 6. 插頭(英規) |
| 3. 電源適配器 | 7. 插頭(澳規) |
| 4. 插頭(歐規) | |

Phottix 保修卡

Phottix將會按當地法規提供保修/更換服務。

詳情請查閱Phottix網站phottix.com/warranty

請小心保存此卡，不要遺失

Phottix.com



Printed in China