

FP FLASHPOINT

FP

Auto Stand




Instructions


1. Loosen the locking screw that controls the leg extension (at the top of where the 3 legs meet)
2. Extend the legs until the brake ring stops you from extending them any further
3. Tighten the locking screw that controls the leg extension while the legs are fully extended
4. Lift the stand, the legs should collapse for easy location changes
5. Place the stand on a flat, hard surface, the legs should automatically extend and the base should lift off the ground
6. If the floor is not smooth enough the legs may not fully extend, use your foot to sweep one of the legs to its fullest extension WHILE HOLDING THE CENTER COLUMN
7. To collapse the stand for packing, remove the light, then loosen the locking screw that controls the leg extension
8. Collapse the legs until the brake ring stops you from collapsing them any further
9. Tighten the locking screw




1

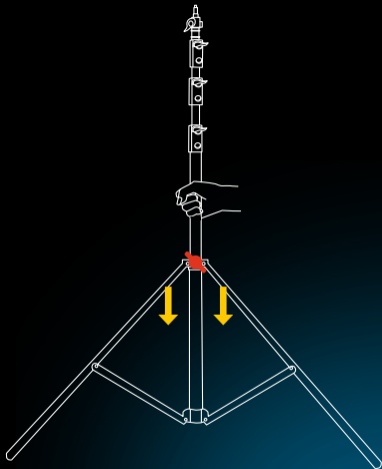

2

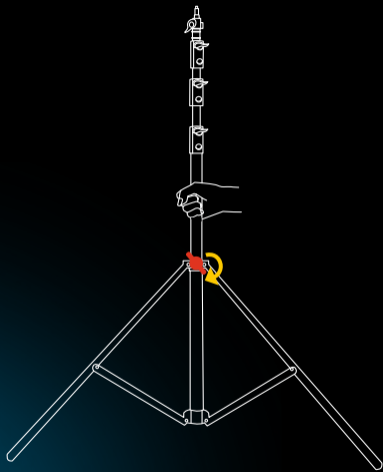

3

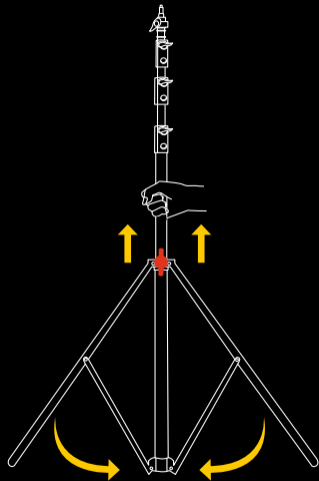

4

Warnings

- Only mount your lights when the legs are fully extended
- Do not subject the stand to a high center of gravity, which can cause it to tip and fall
- Use sandbags and other weights when needed
- Never tilt the stand forward or carry it tilted or horizontal when something is mounted on it, this will damage the column locks
- Misuse can result in serious damage to the stand, your lighting equipment, and bystanders and property
- Be mindful of ceiling height, do not damage the ceiling or your lights with sudden impacts
- Remember that when you lift the stand the lights go HIGHER than their current position, and keep the previous warning in mind
- Don't say we didn't tell you so