GVM

GREAT VIDEO MAKER

GVM Official website

Facebook

Web: www.gvmled.com
B&H Email: bh@gvmled.com
Grow Email: support@gvmled.com
Amazon Email: gvmledservice@hotmail.com



GVM

Great Video Maker

TD-JY258

CONTENTS

Product Introduction ..... Page 1

Disclaimers ..... Page 1

Product parameter ..... Page 2

Product structure analysis ..... Page 3

Installation method ..... Page 4~6

Description of product control keys ..... Page 7

Precautions ..... Page 8

Simple faults and troubleshooting ..... Page 8

Use and preservation ..... Page 9

Packing list ..... Page 10

PRODUCT INTRODUCTION

Welcome to use "TD-JY258". This product is specially designed for experienced photography enthusiasts. The product usage scenarios are suitable for live broadcast, outdoor studio photography, etc., and can also be used for YouTube video shooting. The main features of the product are:

① Ten-step adjustment of the light brightness, the color is monochrome temperature of 5600K, with 256 LED bulbs, which helps to restore the color of the object and provide you with natural and vivid shooting effects.

② Adopts battery power and DC input Dual power supply design: equipped with battery for outdoor use, optional adapter can use DC input for long-term continuous power supply.

③ With white and yellow dual-color soft light board, custom control fill light, allowing you to more easily and easily shoot the desired results.

We firmly believe that the correct use of this product will definitely help your shooting work. Before using the product, we strongly recommend that you carefully read the following user guide.

DISCLAIMERS

1. Before using this product, please read the instructions carefully and make sure use the product correctly. If you don't obey the instructions and warnings, you maybe cause harm to yourself and the people around, or even damage the product and other things around.
2. Once you use this product, you are deemed to have read the disclaimer and warning carefully, understand and acknowledge all the terms and contents of this statement, and promise to take full responsibility for the use of this product and possible consequences.

PRODUCT PARAMETER

- Brand：GVM
- Product Model：TD-JY258
- Product Name：Photography Light
- Product Type：Photography Fill Light
- Features / Features：Portable, High color rendering index light beads
- Color Rendering Index：≥97
- Color Temperature：Monochrome temperature 5600K
- Brightness：6000lux/0.5m；1800lux/1m
- Light Adjustment Method：Ten-step key dimming
- Lamp Beads Quantity：256
- Product Weight：0.55KG
- Product Size(mm)：496x56x35
- Power：15W
- Voltage：DC12V
- Power Supply Mode：The DC input & The battery
- Battery Capacity：7.4V-4400mAh*1
- Power Supply：Power adapters are not provided and need to be purchased separately
- Cooling：Natural heat dissipation
- Product Material：Aluminum alloy
- Commodity Origin：China. Huizhou

PRODUCT STRUCTURE ANALYSIS

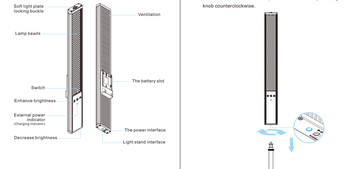

INSTALLATION METHOD

① The lamp can be installed and fixed on the bracket by rotating the knob clockwise, and the lamp can be unloaded by rotating the knob counterclockwise.

② The soft light plate from the lamp panel above to insert, forward push the soft light plate lock button.

③ There are two power supply modes to choose.

① Insert a lithium battery into the battery slot and use the battery for power.

② Purchase a power cord and adapter separately, connect the power cord and adapter for power supply.



DESCRIPTION OF PRODUCT CONTROL KEYS



① The power switch

② Brightness enhancement button： Light press to enhance brightness (1~15 file)

③ Diminished brightness button： Light press to brightness diminished (1~15 file)

④ External power indicator (Charging indicator)

PRECAUTIONS

① Please use the matching power adapter or lithium battery with the same specification to power the product. Do not use power adapter with different output voltage parameters.

② The product is not waterproof, please use it in rainproof environment.

③ The product is not anti-corrosion, therefore do not let the product touch any corrosive liquid.

④ When using the product, make sure the product is put firmly and prevent from falling and damage.

⑤ If the product will not be used for a long time, please switch off the power to reduce energy loss.

SIMPIE FAULTS AND TROUBLESHOOTING

Phenomenon	Check the product	Troubleshooting
The switch indicator does not light up.	① Purchase a power cord and adapter separately, connect the power cord and adapter for power supply.	Make sure the adapter is well contacted with the power plug.
	② Insert a lithium battery into the battery slot and use the battery for power.	Charge the battery before using it.

USE AND PRESERVATION

Do not put the product in a highly humid, strong electromagnetic field, direct sunlight, high-temperature environment. If not use the product for a long time, disconnect the power and take out the battery.

Clean： Before clean, disconnect the power plug. And use wet cloth rather than any detergent or soluble liquid, avoiding damaging the surface layer.

Power： Make sure the power is in the demanded range, not too high or too low. Correctly load the battery, in order not the damage to machine.

Repairing： If there is fault or performance degradation, do not unpack the shell by yourself, avoiding damage the machine and lose the right of maintenance. When there is a fault, do not hesitate to contact us, and we will do our best to deal with the problem.

Accessories： Please use the accessories provided by manufacturer and approved ones, in order to maximize the performance.

Guarantee： Do does not modify the product, or you will lose the right of maintenance.

PACKING LIST

Name	Quantity	Notes
Main Machine	1	
Lithium Battery	1	
Battery Charger	1	
Diffuser	1	
User Manual	1	