

# SmallRig

## - RC220B -

User manual

## Foreword

Thank you for choosing SmallRig RC 220B LED Video Light.

## •Instructions•

1. Please read this user manual carefully.
2. Keep this user manual and always include it when passing the product onto the third party.
3. Heed all warnings and follow all instructions in this user manual.
4. Close supervision is necessary when any fixture is used by or near children. Do not leave the fixture unattended while in use.
5. Care must be taken as burns can occur from touching hot surfaces.
6. Do not operate the fixture if a cord is damaged or if the fixture has been dropped or damaged until it has been examined by qualified service personnel.
7. Position any power cables so that they will not be tripped over, pulled or put into contact with hot surfaces.
8. If an extension cord is necessary, a cord with an amperage rating at least equal to that of the fixture should be used. Cords rated for less amperage than the fixture may overheat.
9. Always unplug the lighting fixture from the electrical outlet before cleaning and servicing or when not in use. Never yank the cord to remove the plug from the outlet.
10. Let the lighting fixture cool completely before storing.
11. To reduce the risk of electric shock, do not immerse this fixture in water or any other liquids.
12. To reduce the risk of fire or electric shock, do not disassemble this fixture. Contact [smallrig@smallrig.com](mailto:smallrig@smallrig.com) or take it to qualified service personnel when service or repair work is required.
13. The use of an accessory attachment not recommended by the manufacturer may increase the risk of fire, electric shock, or injury to any person operating the fixture.
14. Power this fixture by connecting it to a grounded outlet.
15. Please remove the protection cover before powering the light.
16. Please remove the EVA protection cover before using the reflector.
17. Please do not block the ventilation and do not look at the light directly when it is powered on.
18. Please do not place the LED lighting fixture near any liquids or other flammable objects.
19. Only use a dry microfiber cloth to clean the product.
20. Please have the product checked by an authorized service personnel agent if your product has a problem.
21. The malfunctions caused by unauthorized disassembly are not covered under the warranty.
22. We recommend only using the original SmallRig cable accessories. Please note that our warranty for this product does not apply to any repairs required due to any malfunctions of unauthorized SmallRig accessories, although you may request such repairs for a fee.
23. This product is certified by CE,UKCA,RoHS,FCC,IC,TELEC and RCM.Please operate the product in full compliance with the operation standards. Please note that this warranty does not apply to repairs arising from malfunctions, although you may request such repairs on a chargeable basis.
24. The instructions and information in this manual are based on thorough, controlled company testing procedures. Further notice will not be given if the design or specifications change.



## **FCC Compliance Statement**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

### **[Warning]**

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### **[Note]**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates,uses and can radiate radio frequency energy, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try reorient or relocate the receiving antenna.



- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet in a different circuit than the receiver is connected to.
- Consult the dealer or an experienced radio/TV technician for help.

## **RF Warning Statement**


This device has been evaluated to meet general RF exposure requirements.

## Check list


When you unbox the product, please make sure all the items below are included. Otherwise, contact with the seller immediately.

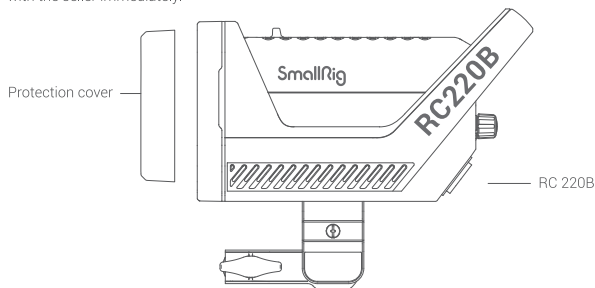


55°Hyper-Reflector



AC adapter



Power cable




Carrying bag



## Product Details


### 1. Light

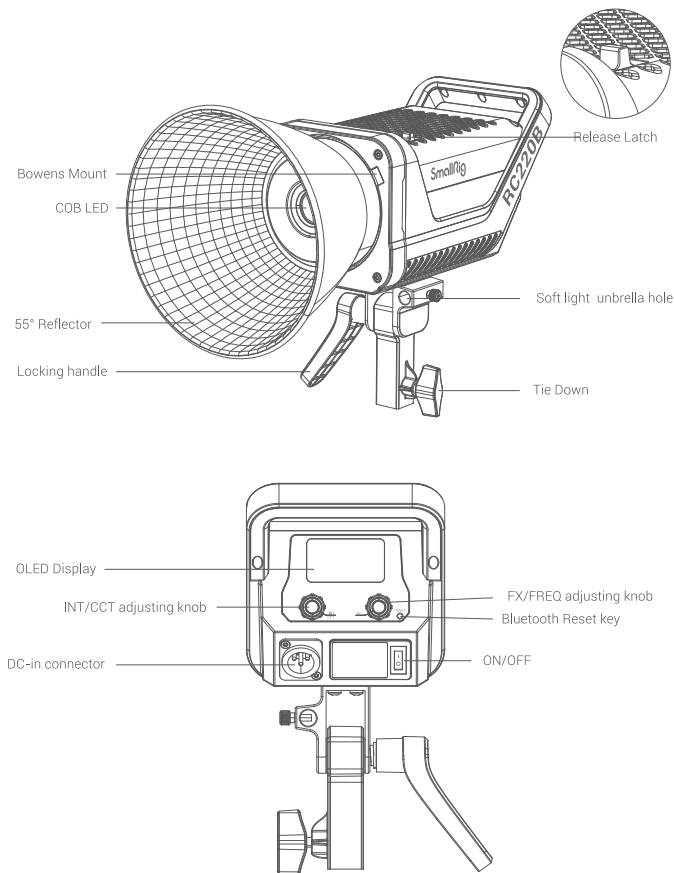

## Installations

### 1. Attaching /detaching the protection cover


Push the handle of the lever in the direction of the arrow shown in the picture, and rotate the cover to pull it out. Reverse rotation will put into the protection cover.

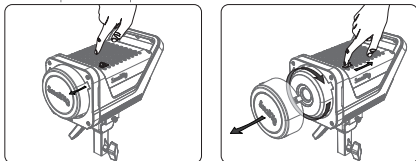

(\* Notice: Always remove the protection cover prior to turning on the light. Always reinstall the cover when packing it away.)

### 2. Installation and removal of the reflector

Push the lever handle according to the arrow direction shown in the picture and rotate the reflector into it. Rotating in the opposite direction pulls out the reflector.

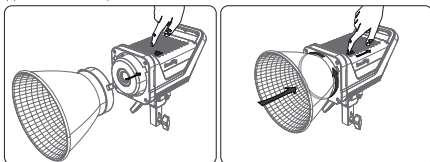


### 3. Setting up the light

Adjust the light to the appropriate height, rotate tie-down to fix the light on the stand. Then, adjust the light to the required angle and tighten the lock handle.




### 4. Soft light umbrella installation

Insert the soft light handle into the hole and lock the knob on the hole.

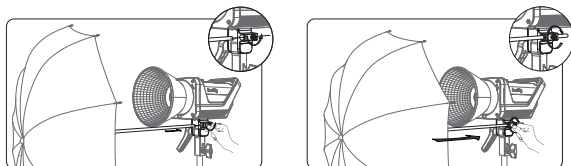


## The power supply

### 1. Powered by AC

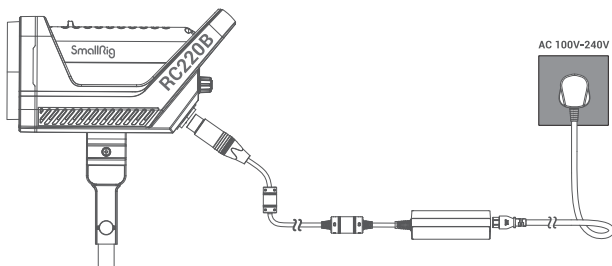


Notice: Please press the spring-loaded lock button on the power cord to remove the cord.  
Do not pull it out forcibly.

### 2. Powered by V-mount battery

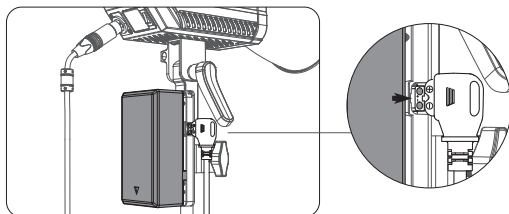



#### Notice :

- (1) Please press the spring-loaded lock button on the power cord to remove it. Do not pull it out forcibly.
- (2) V-mount battery plate, battery, and power cable are not standard configurations and need to buy separately.
- (3) The input voltage of the light is between DC 12V and DC 30V.
- (4) The V-mount batteries that are 14.4V or 26V with the capacity above 150Wh are recommended to use with the light.
- (5) When using the 14.4V V mount battery or AC adapter under 20V, the maximum output will be reduced by 50%.



## Operations



1. Press the power button to turn the light on and off.



## 2. Manual control



### 2.1 Brightness adjustment

Rotate the INT adjusting knob to adjust the brightness with 1% variable and the brightness change range is 0-100%, the change of the brightness will be displayed in real time on the light body.



### 2.2 Color temperature adjustment


Short press the INT knob to adjust the color temperature, and the CCT range is 2700K-6500K.



### 2.3 FX control

- a. Rotate the FX knob on the right to get Normal and Paparazzi/TV/Fault bulb/Lightning/Breath/Party/Flash/Flame/Firework, nine kinds of FX.
- b. Shot Press the FX knob then switch to the frequency adjustment, the change range is 1-10.

**Notice:** The brightness of every FX can be set separately

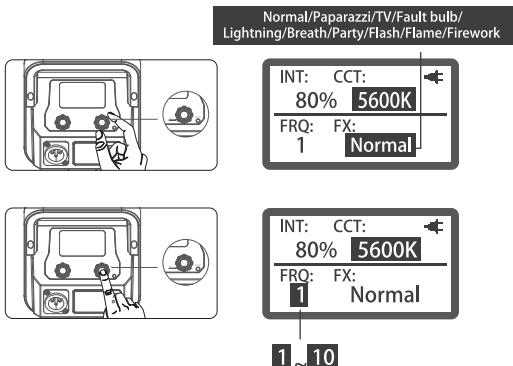

### 3. Bluetooth reset

- 3.1 Long press the Reset button for 3 seconds, the Bluetooth icon will appear in the upper right if the LCD display. The icon flashes 6 times and the Bluetooth is reset.
- 3.2 Then you can connect the light through SmallGoGo and control it again.




### 4. OTA mode

Firmware updates can be updated online via the SmallGoGo App for OTA updates.

## 5. App control

The user can download the SmallGoGo App and connect the the device named 220B-xxxxxx. After the light is controlled by the App,the Bluetooth icon will be displayed on the upper right of the light LCD.

**Notice:** Please enable the mobile location function when using the App.

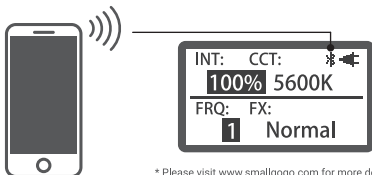

\* Please visit [www.smallgogo.com](http://www.smallgogo.com) for more details regarding how to use the App to control you lights.

## 6. Using the SmallGoGo App

You can download the SmallGoGo App from the iOS App or Google Play Store for enhancing the functionality of the light.

Please visit [www.smallgogo.com](http://www.smallgogo.com) for more details regarding how to use the app to control you lights.



Operation Manual



App Download

## Specifications

Light Operating Current	13A @20V	Power Consumption	260W
Light Power Supply	DC12~30V	Cooling Mode	Active Cooling
Adapter Power Supply	AC100-240V 50/60Hz	CRI	95+
TLCI	96+	App Control Type	Bluetooth
Color Temperature	2700K-6500K(±200K)	Remote Ability	≤100m
Radio Frequency	2.4GHz	Power supply	AC / V-Mount batteries
Size	240×122×237.6 mm	Weight	2,850 g ±20 g

## Photometrics

CCT	Distance Illumination		1m	3m	5m
2700K	Bare Bulb		266(fc)	30(fc)	12(fc)
			2860(lux)	322(lux)	129(lux)
	Hyper-Reflector		3086(fc)	243(fc)	83(fc)
			33200(lux)	2620(lux)	891(lux)
3200K	Bare Bulb		336(fc)	38(fc)	15(fc)
			3610(lux)	405(lux)	164(lux)
	Hyper-Reflector		3941(fc)	307(fc)	106(fc)
			42400(lux)	3300(lux)	1140(lux)
5600K	Bare Bulb		414(fc)	47(fc)	19(fc)
			4450(lux)	506(lux)	203(lux)
	Hyper-Reflector		4907(fc)	379(fc)	132(fc)
			52800(lux)	4080(lux)	1420(lux)
6500K	Bare Bulb		360(fc)	41(fc)	16(fc)
			3870(lux)	440(lux)	175(lux)
	Hyper-Reflector		4238(fc)	335(fc)	115(fc)
			45600(lux)	3600(lux)	1240(lux)

\*This is an averaged result,the number might be slightly different on each light.

## Service Warranty

---

Please keep your original purchase receipt and warranty card, including your purchase date, product serial number, etc., which are required for the warranty service.

### After-sale warranty terms

1. 7 Days DOA Return Policy: Within 7 Days from the date of the package receipt, return or replacement can be done if the item received is malfunctioning or physical damaged ( not caused by human abused ), return shipping cost will be on SmallRig's charge.
2. 1-Year Warranty: Within 1-year from the date of the package receipt, defective product which is not caused by human abused is eligible to get repair/replacement for free; defective product which is caused by human abused, repair/replacement will be charged based on the damage level.

### This warranty does not cover

1. Defect caused by users' violation of the "Instructions" and "Usage Steps".
2. The product identification or SN label is removed or defaced in any way.
3. The product is serviced or repaired by anyone other than our company or the service agency authorized by our company.

### Guarantee Card

Serial No.	
Item Name	
Purchase Date	
User Name	
Mobile	
Address	
Receipt	