



Fujifilm X-T3 Cage

The Fujifilm X-T3 is our "no-cage" cage - lightweight and compact, and compatible with Zacuto's own Arca Swiss-The 'Polaris'. It packs in a ton of features! The Cage screws into the bottom of the camera with a provided 1/4 20 screw. It also attaches to the sides of the camera, using the X-T3 eyelet neck strap connection with provided screws. It includes a Zacuto camera hand strap for a secure and comfortable grip on the camera. The cage ends at the eyelet neck strap connection, allowing you to use the camera's built-in handgrip, keeping the cage small and light and have easy access to all camera controls.

The top of the cage includes numerous 1/4 20 for mounting accessories. It also has a built-in Z-Rail for mounting an optional top handle or other accessories. The bottom of the cage has 2 1/4" 20 threads and a 3/8" 16 thread for a tripod plate and a built-in Arca Swiss compatible quick release mounting base or Zacuto's own Polaris Mounting Plate. This allows you to move quickly from handheld, to shoulder mount, to tripod shooting.

If you'd like to add rods onto your cage, you can slide the cage into our Polaris Baseplate and from there you can also build a shoulder rig.



Check out our tutorial videos at zacuto.com

Call us at
312-863-3456

Parts & Features



Optional Accessories





Assembling Fujifilm Cage

Step 1




Remove the neck strap eyelet from the left side of the camera.

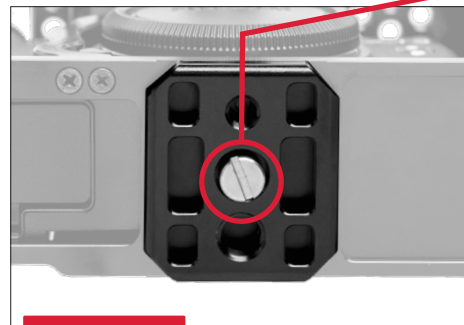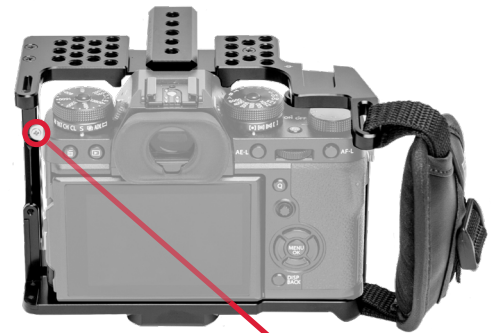


Step 2

Insert the camera into the cage and thread in 1/4"-20 screw on the bottom.

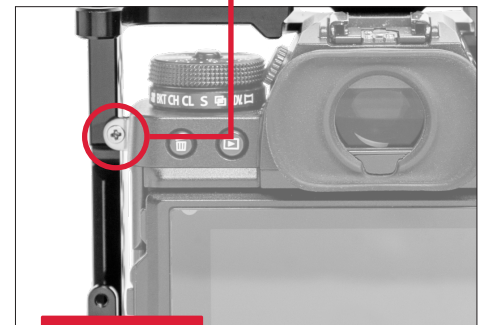

Step 3

Thread in eyelet screw. Tighten down 1/4"-20 and eyelet screw.

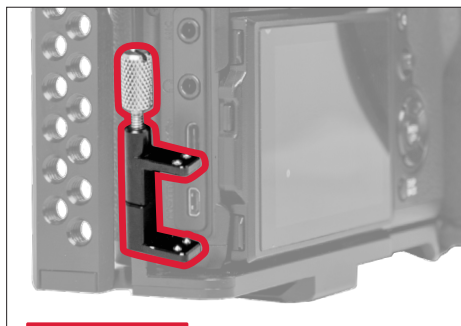

Step 4

Align HDMI clamp over the camera's HDMI port and loosen silver screw.



Step 5

Insert right angle HDMI adapter into camera. Reinsert thumb screw back into HDMI clamp and tighten on right angle HDMI adapter.