

AVIOM®

A320
Personal Mixer

A320
Personal Mixer

User Guide

READ THIS FIRST

Important Safety Instructions

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with a dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or third prong is provided for your safety. If the provided plug does not fit your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles, and the point where they exit the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
13. Unplug this apparatus during lightning storms or when unused for long periods of time.
14. Refer all servicing to qualified personnel. Servicing is required when the apparatus has been damaged in any way, such as when the power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
15. No on/off power switches are included in the system. The external power supply should be used to control power to an Aviom device. This power supply should remain readily operable.
16. The solid line over dashed line symbol (— — — — —) indicates that the input voltage must be a DC voltage.
17. The box within a box symbol () indicates that the external power supply is double insulated.



WARNING!



TO REDUCE THE DANGER OF ELECTRICAL SHOCK DO NOT REMOVE COVERS.

NO USER SERVICEABLE PARTS INSIDE.

REFER SERVICING TO QUALIFIED SERVICE PERSONNEL ONLY.

To reduce the risk of fire or electrical shock, do not expose this product to rain or other types of moisture.

To avoid the hazard of electrical shock, do not handle the power cord with wet hands.

Replace fuse with same type and rating.

Operating Temperature: 0°C to 50°C (32°F to 122°F)

Risque de choc électrique – ne pas ouvrir. Pour réduire le risque de feu ou de choc électrique, ne pas exposer cet équipement à la pluie ou la moisissure. Pour réduire le risque de choc électrique, ne pas retirer le couvercle. Pièces non remplaçables par l'utilisateur. Confier la réparation à une personne qualifiée. Attention – utiliser seulement un fusible de rechange de même type.

Cet appareil est conforme à la section 15 de la norme FCC. Son fonctionnement est soumis aux conditions suivantes : (1) cet équipement ne doit pas causer des interférences nocives, et (2) cet équipement doit accepter toute interférence captée incluant les interférences pouvant causer des opérations indésirables.

Cet appareil numérique de Classe B est conforme à la norme NMB-003 du Canada.

IMPORTANT:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to the product not expressly approved by Aviom, Inc. could void the user's FCC authority to operate the equipment.

CAUTION:

- Using any audio system at high volume levels can cause permanent damage to your hearing.
- Set your system volume as low as possible.
- Avoid prolonged exposure to excessive sound pressure levels.

Certifications

EMC: EN55103-1:2009
EN 55103-2: 2009
EN 55022:2006 / CISPR 22:1997
CAN/CSA-CEI/IEC CISPR 22:02
FCC 47 CFR, Part 15

Safety: UL 62368-1 Ed 2.0; Proposal Number 500542870;
Testing done to UL 62368-1 first edition
Can/CSA C22.2 62368-1

ETL/cETL Listed and RoHS Compliant



Notice of Rights

All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means—electronic, mechanical, photocopy, recording, or otherwise—without written permission of Aviom, Inc.

Trademarks

Aviom, A-Net, the A-Net icon, Pro16, Pro16e, Pro64, Virtual Data Cables, m-control, One-Touch Ambience, Dual Profile Channel, Network MixBack, and AllFrame are trademarks of Aviom, Inc. All other trademarks are the property of their respective owners.

©2014 Aviom, Inc. All rights reserved.

Information is subject to change without notice.

Aviom, Inc. Limited Warranty

Aviom, Inc. warrants this product against defects in materials and workmanship for a period of **one year** from the date of the original retail purchase.

This warranty does not apply if the equipment has been damaged due to misuse, abuse, accident, or problems with electrical power. The warranty also does not apply if the product has been opened or modified in any way; if the product serial number has been damaged, modified, or removed; or if the original Quality Assurance label has been damaged, modified, or removed.

If a defect is discovered, first write or call Aviom, Inc. to obtain a Return Authorization number. No service will be performed on any product returned without prior authorization. Aviom, Inc. will, at its option, repair or replace the product at no charge to you. The product must be returned during the warranty period, with transportation charges prepaid to Aviom, Inc., 1157 Phoenixville Pike, Suite 201, West Chester, PA 19380. You must use the product's original packing materials for shipment. Shipments should be insured for the value of the product. Include your name, address, phone number, description of the problem, and copy of the original bill of sale with the shipment. The Return Authorization number should be written on the outside of the box.

THIS LIMITED WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS. YOU MAY HAVE OTHER RIGHTS, WHICH VARY FROM STATE TO STATE (OR JURISDICTION TO JURISDICTION). AVIOM'S RESPONSIBILITY FOR MALFUNCTIONS AND DEFECTS IN HARDWARE IS LIMITED TO REPAIR AND REPLACEMENT AS SET FORTH IN THIS LIMITED WARRANTY STATEMENT. ALL EXPRESS AND IMPLIED WARRANTIES FOR THE PRODUCT, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED IN DURATION TO THE WARRANTY PERIOD SET FORTH ABOVE. NO WARRANTIES, WHETHER EXPRESS OR IMPLIED, WILL APPLY AFTER SUCH PERIOD.

AVIOM, INC. DOES NOT ACCEPT LIABILITY BEYOND THE REMEDIES SET FORTH IN THIS LIMITED WARRANTY DOCUMENT. AVIOM, INC.'S LIABILITY IS LIMITED TO THE REPAIR OR REPLACEMENT, AT OUR OPTION, OF ANY DEFECTIVE PRODUCT, AND SHALL IN NO EVENT INCLUDE INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY KIND.

SOME STATES DO NOT ALLOW EXCLUSIONS OR LIMITATION OF IMPLIED WARRANTIES OR LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU.

Warranty Information

Please record the following information for future reference:

Your Authorized Aviom Dealer:

Name: _____

Address: _____

Phone: _____

Serial Numbers of Your Aviom Products: _____

Date of Purchase: _____

Your Authorized Aviom Dealer is your primary source for service and support. The information recorded above will be helpful in communicating with your Authorized Aviom Dealer should you need to contact Aviom Customer Service. If you have any questions concerning the use of this unit, please contact your Authorized Aviom Dealer first. For additional technical support, or to find the name of the nearest Authorized Aviom Repair Station, check the Aviom web site at www.aviom.com.

To fulfill warranty requirements, your Aviom product should be serviced only at an authorized Aviom service center. The Aviom serial number label must appear on the outside of the unit, or the Aviom warranty is void.

This manual and its contents are copyrighted by Aviom, Inc. All rights are reserved by Aviom, Inc. This document may not, in whole or in part, be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form without prior written consent from Aviom, Inc.

The software and/or firmware contained within Aviom products is copyrighted and all rights are reserved by Aviom, Inc.

Although every effort has been made to ensure the accuracy of the text and illustrations in this manual, no guarantee is made or implied as to the accuracy of the information contained within.

Table of Contents


Important Safety Instructions	ii
Certifications.	iv
Aviom, Inc. Limited Warranty.	v
Warranty Information	vi
A320 Personal Mixer	1
Feature Overview	1
Conventions Used in this Document	2
Using Personal Mixers	2
Cat-5 Cables	2
A-Net Distributors	2
Channels and Slots	2
Button Presses	2
Package Contents	3
About A-Net	3
Compatibility	4
Pro16 Products	4
Pro64 Products	4
About Category 5	5
Cat-5e Cables	5
Cable Lengths	6
AC Line Conditioning.	7
Supplying Power to Your A320	7
Cleaning and Maintenance Information	7
Quick Start Tutorial	8
Choose a Mixer Mode	8
16-Channel Mode	8
32-Channel Mode	8
Basic A320 Features	9
Connect the A320 to an A-Net Distributor	10
Make Your First Mix	11
Set Channel Volumes	11
Set Stereo Placement	12
Adjust the Master Tone Settings	12
Save a Mix Preset	13
A320 Front Panel	14
Mix Channels	14
Channel Label Strip	15

Mix Channel Buttons	15
Mix Presets.	15
16-Channel Vs. 32-Channel Mode	16
Channel Controls Section	17
Channel Controls.	18
Central Control Knob	18
Channel Volume	18
Stereo Placement	19
Mono Channels	19
Stereo Channels	20
Using the A320 in 16-Channel Mode	20
Using the A320 in 32-Channel Mode	20
Compatibility	20
Understanding Stereo Placement on the A320	21
Channel Mute	22
Channel Solo	23
Trim All Function	24
Master Section	25
A-Net and the A320	26
A-Net LED	26
Setting the Mixer Mode	26
Troubleshooting Mixer Modes	27
Master Volume	28
Master Tone Button	28
Enhance Tone Control	28
Treble Tone Control	29
Bass Tone Control	29
Mix Presets	30
Saving Mix Presets	31
What Gets Saved in a Mix Preset	32
Settings Not Saved in a Preset	32
Recall Mix Button	33
To Recall a Mix Preset	33
Clear a Mix	33
 A320 Personal Mixer Rear Panel	 34
Rear Panel Features	35
Stereo Mix Out	35
A-Net In	35
 Personal Mixing System Setup	 36
Pro16e Personal Mixing Systems	36
16-Channel Systems	37
How Stereo Links Work in a 16-Channel System	37

Parallel Connections	38
Adding the A320 to an Existing System	38
32-Channel Systems	39
How Stereo Links Work in 32-Channel Systems	40
Using Multiple Input Devices	41
Slot Range Setup	42
64-Channel Systems	43
Legacy Products	43
Using Legacy Input Devices	44
 Connecting Monitoring Devices	 45
Connecting to the Stereo Mix Output	45
Headphones and Earbuds	45
Stereo Wireless In-Ear Systems	46
Stereo Speakers	47
Specifications	48
Dimensions	49
Mixer Label	50
Cat-5 Cable Pinout	51
T568A	51
T568B	51
Index	52
Warranty Registration	56

A320 Personal Mixer

*Thank you for purchasing the Aviom **A320 Personal Mixer**. This User Guide is designed to familiarize you with your new product's features and to have your personal mixing system up and running as quickly as possible.*

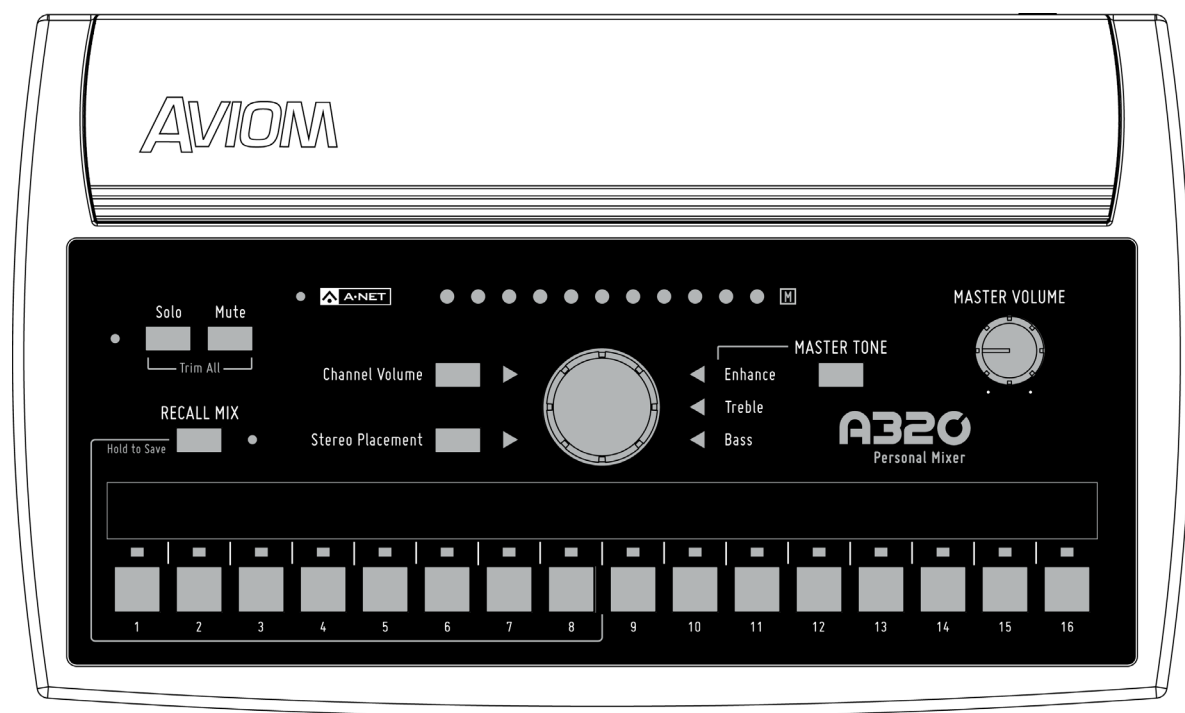

Feature Overview

The A320 Personal Mixer is part of Aviom's Pro16® Series of products; it can be combined with Pro16® and Pro16e™ analog input devices, console cards, and/or the Pro64® ASI A-Net® Systems Interface to create personal mixing systems for applications in live performance, recording, and broadcast.

The A320 Personal Mixer features:

- 16 mono or stereo mix channels
- 32-channel mix engine
- Advanced Stereo Placement positioning controls for improved sonic clarity
- Three-band master tone controls with Enhance™, optimized for in-ear monitors
- 8 Mix Presets
- Powered over the Cat-5 cable
- Seamless integration with existing Aviom personal mixing systems

Conventions Used in this Document

Using Personal Mixers

When referring to the use of the Personal Mixers in a personal mixing system in general, the term **Personal Mixer** is used to describe a case where an A320 Personal Mixer or A360 Personal Mixer can be used. Legacy personal mixers such as the A-16II and A-16R may also be used.

Cat-5 Cables

In most cases Cat-5e, Cat-6, and Cat-6e cables can be interchanged. When speaking about interconnections between components in a system, the term **Cat-5** is used generically to indicate the use of any of the applicable cable types.

A-Net Distributors

The Aviom D800, D800-Dante, D400, D400-Dante, A-16D and A-16D Pro A-Net Distributors are referred to generically as **A-Net Distributors**. These are used to supply power to the A320 and to copy an A-Net digital signal and split it into multiple copies so that personal mixers may be connected in parallel.

Channels and Slots

Analog input devices and digital console cards used with Aviom personal mixing systems typically provide 16 input channels each to the Pro16 network. Once a part of the network, we refer to these resources as **Slots** rather than channels.

Button Presses

When instructed to press a specific button on the A320 Personal Mixer, a special font style is used. For example, "Press the **Solo** button."

Package Contents

The A320 Personal Mixer box includes:

- One A320 Personal Mixer
- Quick Start Documentation

Options for your personal mixing system include:

- Cat-5e/Cat-6 interconnect cables
- MT-1a Mic Stand Mount
- D800, D800-Dante, D400, D400-Dante, A-16D or A-16D Pro A-Net Distributors

Also included is a Warranty Registration, found within this User Guide. Be sure to fill out the form and return it to Aviom, Inc. via mail or fax as soon as possible.

About A-Net

A-Net® is a proprietary high-speed data transmission protocol developed by Aviom, capable of sending and receiving high-quality digital audio using readily available Cat-5 cables.



A-Net is based on the physical layer of Ethernet, a Local Area Network (or LAN) technology. This provides A-Net with a mature and robust base on which to build. However, it is important to note that A-Net devices are not compatible with Ethernet devices.

Some of the benefits of using A-Net to transmit digital audio are:

- Virtually no latency; analog in to analog out is always less than one millisecond
- No ground loops
- Easy cabling using readily available components
- An unlimited number of A-Net devices can be used in a system
- Ease in spanning long distances between system components

There are two versions of Pro16 A-Net: the original Pro16 A-Net signal carries sixteen channels of digital data while the enhanced Pro16e version of A-Net is capable of carrying up to 64 channels of digital audio data. Like standard Pro16 A-Net, Pro16e is a point-to-point digital audio protocol.

Pro16e A-Net data is intended for use with the A320 and A360 Personal Mixers which can take advantage of the higher network channel count that Pro16e provides.

Compatibility

The A320 Personal Mixer is compatible with current and legacy Pro16, Pro16e, and Pro64 A-Net devices as detailed below.

Pro16 Products

The A320 Personal Mixer must be connected to a powered port on an A-Net Distributor to be used in a personal mixing system. Compatible A-Net Distributors include:

- D800 A-Net Distributor
- D800-Dante A-Net Distributor
- D400 A-Net Distributor
- D400-Dante A-Net Distributor
- A-16D A-Net Distributor (requires optional PS-120 Power Supplies)
- A-16D Pro A-Net Distributor

The **A-Net Out** from the following devices may be connected to the A-Net distributors listed above to provide inputs and A-Net data to the A320 Personal Mixer:

- AN-16/i v.2 Input Module
- AN-16/i-M Mic Input Module
- AV-M8 Mic Input Module
- Aviom16/o-Y1 A-Net Card for Yamaha® devices
- Third-Party Pro16 A-Net digital console cards
- AN-16/i Input Module

Pro64 Products


Adding the ASI A-Net Systems Interface to a Pro64® digital snake or audio network allows Pro64 channels to be translated into Pro16 data. The ASI separates the 64-channel Pro64 stream into up to four 16-channel Pro16 outputs, depending on the Pro64 sample rate being used. Any of the four Pro16 A-Net outputs from the ASI may be connected to the A-Net In on an A-Net distributor to supply A-Net data and DC power to the A360 Personal Mixer.

The ASI's Pro16 A-Net outputs can also be connected to the A-Net In on the AN-16/i v.2 Input Module when creating a personal mixing system that uses the enhanced Pro16e version of A-Net for increased channel count.


About Category 5

The term Category 5 (also referred to as *Cat-5*) is broadly used to describe a type of high performance network cabling used for data transmission purposes to connect computer networks and other devices. A standard patch cable consists of four twisted pairs of copper wire terminated by RJ45 male connectors. The cable assembly is used to provide connectivity between any two Cat-5 female RJ45 jacks.

A variation of the cable, called Category 5e (or Cat-5e), has largely replaced Cat-5 in the field; it uses additional twists in the cable's wire pairs to reduce interference in high-speed network applications. Additional wire pair variations are found in Cat-6 and Cat-6e cables, typically used with gigabit networking devices.



RJ45 Jack



Cat-5e Cable

✓ **NOTE:** While the Cat-5e cables and connectors used on your Aviom products look like typical computer Ethernet network connections, do not connect computers, routers, or other home and business networking equipment to your Aviom products.

Cat-5e Cables

Although the A320 Personal Mixer will operate properly with unshielded Cat-5e cable, shielded Cat-5e (or better) cable must be used to stay below the CISPR 22 Class B, ICES-003, and FCC 47 CFR Part 15 Class B emissions limits.


For fixed or permanent installations, you have the option of running Cat-5 cables inside walls and terminating them with readily available wall panel connectors that include the RJ45 jack. (Solid wire is recommended for permanent installations.) A Cat-5 cable wiring pinout table is included at the end of this document. See "Cat-5 Cable Pinout" on page 51.

In addition to standard Category 5e cables, Cat-6 and Cat-6e cables may also be used.


✓ **NOTE:** When purchasing Category 5e cables, be sure to buy only standard Cat-5e cables, not those sold as crossover cables. A crossover cable is used for file transfer between two computers and is not compatible with your Aviom equipment.

Cable Lengths

For Pro16 applications—connecting one **Pro16** device to another—the Cat-5e cables used with your Aviom products may be up to 500 feet (approximately 150 meters) in length between devices. For example, connecting a Y1 console card from a Yamaha digital console to the **A-Net In** on a D800 A-Net Distributor is such a connection.

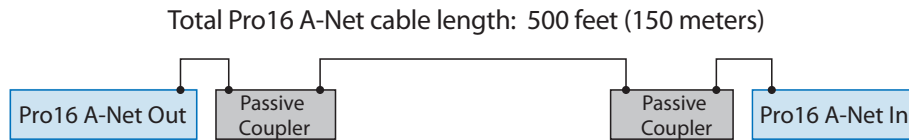

When using **Pro16e**—such as the **A-Net Out** from an AN-16/i v.2 to *any other* Pro16 or Pro16e device—Cat-5e cables may be up to 400 feet (approximately 122 meters) in length between compatible devices due to the larger amount of data being transmitted to accommodate Pro16e's higher channel count.

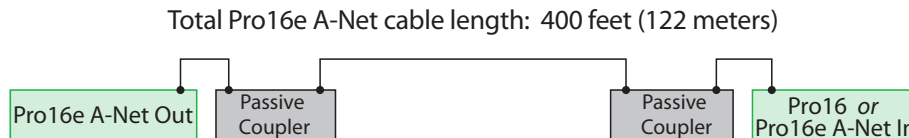

The maximum cable length specification applies to the total cable length between an **A-Net Out** port on one device and the **A-Net In** port on the next A-Net capable device in your system.

Your cable length performance will be affected by a number of factors including the quality of the cables used, and the number of passive devices such as cable couplers or passive wall panel interconnections in use.

Stranded or solid Cat-5e cable may be used; stranded cable is easier to deploy on a stage while solid core cable provides slightly better maximum distance performance. Solid core wire is typically used in permanent installations in walls and across ceilings.

When using the optional SB4 System Bridge with Pro16 and Pro16e devices, the cable length specification applies to the *total* cable length between the two active A-Net devices being connected with the passive System Bridge, plus all cables. This is also true when using a passive inline coupler to extend cable lengths.

Pre-made cables in a variety of lengths and colors are available at most computer outlets. Cables may be extended by using a simple passive device called an *inline coupler* to add length to existing cables (as long as you do not exceed the specified maximum cable length). If you need a longer cable on occasion, this is a simple solution. Note that the maximum cable length performance can be compromised by using inline couplers or other passive connection devices.

AC Line Conditioning

Aviom products are digital devices and as such are sensitive to sudden spikes and drops in the AC line voltage. Changes in the line voltage from lightning, power outages, etc. can sometimes damage electronic equipment.

To minimize the chance of damage to your equipment from sudden changes in the AC line voltage, you may want to plug your equipment into a power source that has surge and spike protection. Power outlet strips are available with built-in surge protection circuits that may help protect your equipment.

Other options for protection of your equipment include the use of an AC line conditioner or a battery backup system (sometimes referred to as an *uninterruptible power supply*, or UPS).

Supplying Power to Your A320

The A320 Personal Mixer is intended to be connected to an Aviom A-Net Distributor such as the D800, D800-Dante, D400, or D400-Dante when creating a personal mixing system. A-Net Distributors provide both parallel A-Net connections for up to eight devices as well as the DC power required to run them.

Cleaning and Maintenance Information

The exterior of your Aviom products should be cleaned with a dry, soft, lint-free cloth. For tougher dirt, you can use a cloth slightly dampened with water or with a mild detergent.

When cleaning your Aviom products, never spray cleaners directly onto the product surfaces. Instead, spray a small amount of the cleaning solution onto a clean cloth first. Then use the dampened cloth to clean the product.


✓ **NOTE:** Never use solvents or abrasive cleaners on the finished surfaces of your Aviom products.

Quick Start Tutorial

Can't wait to get started with your A320 Personal Mixer? Don't have time to read the entire manual? Here's a quick guide to setting up your A320.

Choose a Mixer Mode

The A320 can operate in one of two modes, 16-channel or 32-channel, which accommodate the two versions of the A-Net protocol, Pro16 and Pro16e. Which mixer mode you should use is based on the number of input channels your personal mixing system has.

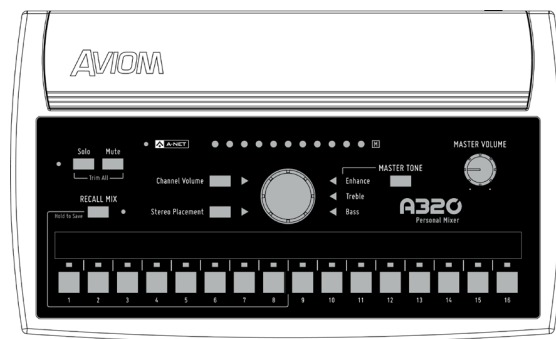

16-Channel Mode

If your system has only one input device (analog or digital console card), use the 16-channel mode. Mono inputs are mapped to a single A320 mix channel button and stereo inputs are mapped to an adjacent pair of channels.

By default, the A320 ships in 16-channel mode, so there is nothing to change if you want to plug your A320 into a 16-channel system. To set the A320 back to 16-channel mode after using the 32-channel mode, hold the **MUTE** and **CHANNEL 1** buttons while powering up the unit. (The A320 powers up when its rear-panel Cat-5 jack is connected to an A-Net Distributor port.)


32-Channel Mode

When a system includes multiple input devices or a Dante network, the 32-channel mode can be used. In 32-channel mode, stereo inputs are mapped to a single A320 mix channel button, allowing up to 16 stereo inputs to be used.

To set the A320 to use 32-channel mode, hold the **MUTE** and **CHANNEL 2** buttons while powering up the unit.

✓ **NOTE:** Once the mixer mode is set, the A320 retains the setting through power cycles and will only need to be changed if the input section of the monitor system it is connected to changes.


Basic A320 Features

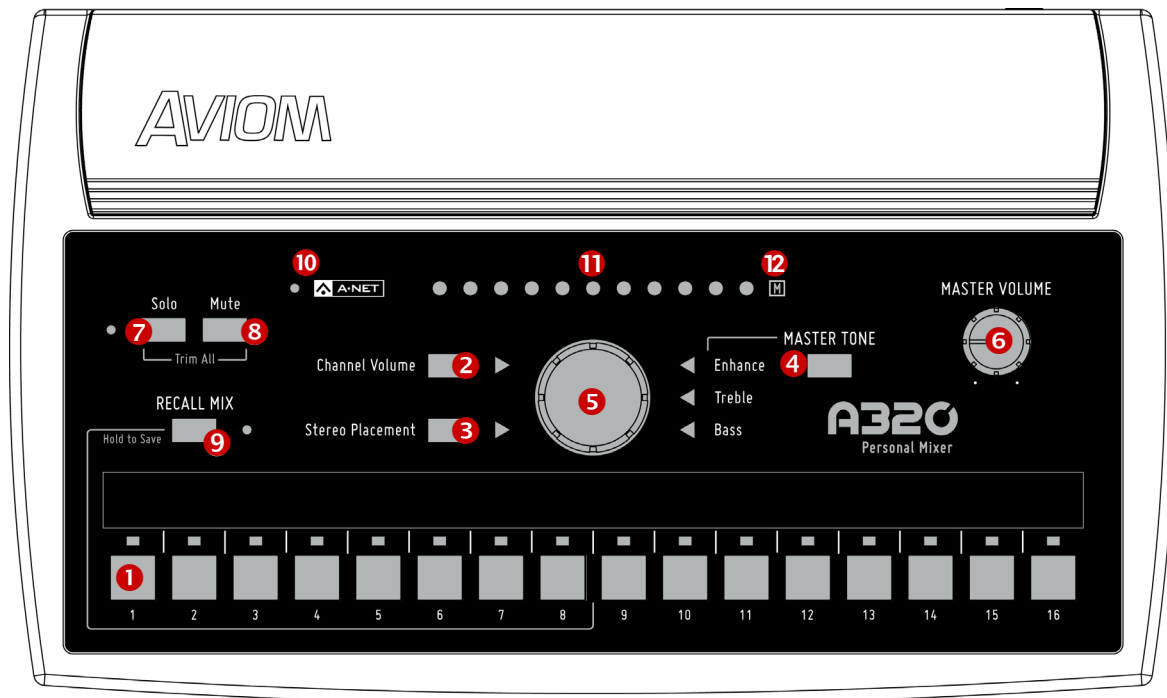

Function		
1	Mix Channel Buttons, with LED	Press to select a channel and make it active for editing.
2	Channel Volume Button	When pressed, the green LED lights. Sets the central control knob to change volume.
3	Stereo Placement Button	Sets the central control knob to change stereo placement. The green LED lights when active.
4	Master Tone Button	Toggle to select Enhance, Treble, Bass, then turn the central control knob. The LED lights when active.
5	Central Control Knob	Changes the value for the selected function—Volume, Stereo Placement, Treble, Bass, or Enhance.
6	Master Volume Knob	Sets the level of the stereo mix in the headphones or earbuds.
7	Solo Button and LED	Press to activate Solo mode; isolates the selected channel from the mix; Solo LED blinks when active.
8	Mute Button	Press to mute the selected channel in the mix. The M icon flashes.
9	Recall Mix Button	Press and release to recall a mix preset; press and hold to save a mix preset.
10	A-Net LED	Lights green for Pro16 A-Net and red for Pro16e A-Net.
11	Volume, Stereo Placement, and Tone LEDs	Shows the value for the selected function being edited.
12	Mute LED	Flashes when the selected channel is muted.

Connect the A320 to an A-Net Distributor

The A320 Personal Mixer needs to be connected with a Cat-5 cable to a powered port on an A-Net Distributor such as the D800 or D400. The A-Net Distributor supplies the multi-channel digital audio data as well as the DC power required to run the A320.

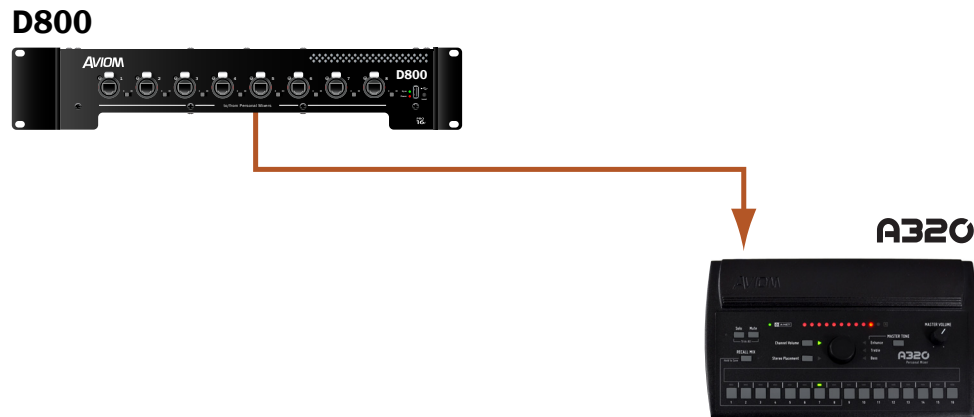

Connect A320 Personal Mixer to an A-Net Distributor.

The Cat-5 cable connecting the A-Net Distributor and the A320 can be up to 400 feet (122 m) in length.

✓ **NOTE:** When connecting the A320 Personal Mixer to a D800 or D800-Dante A-Net Distributor, the D800's front panel switches must be set to the "I" position. The "II" position is for use only with the A360 Personal Mixer.

Make Your First Mix

After plugging headphones or earbuds into the rear-panel **STEREO MIX OUT** jack, you're ready to make your first mix on the A320.

Set Channel Volumes

Start by turning up the volume level of the most important channels, those that supply the essential elements you need most in a monitor system while performing, singing and/or playing an instrument—channels that provide critical timing and pitch reference cues.

- Press a channel button to select a mix channel for editing; the green LED above the channel button lights.
- The green triangle LED next to the **CHANNEL VOLUME** button should be lit. If it's not, press the **CHANNEL VOLUME** button to light it.
- Turn the central control knob to raise the level of the selected channel. The channel's volume is shown in the row of red LEDs across the top of the A320.
- Select another channel and follow the same procedure to set its volume level.




Channel 5 is selected for editing.

The volume setting for each channel in your mix will be saved when you store a mix preset or power down the system.

Set Stereo Placement

Monitoring in stereo provides a more natural monitoring experience, especially if you are wearing in-ear monitors.

- Select the mono or stereo channel that you want to change.
- Press the **STEREO PLACEMENT** button; the green triangle LED next to the button should be lit.
- Turn the central control knob to pan the channel in the stereo mix.

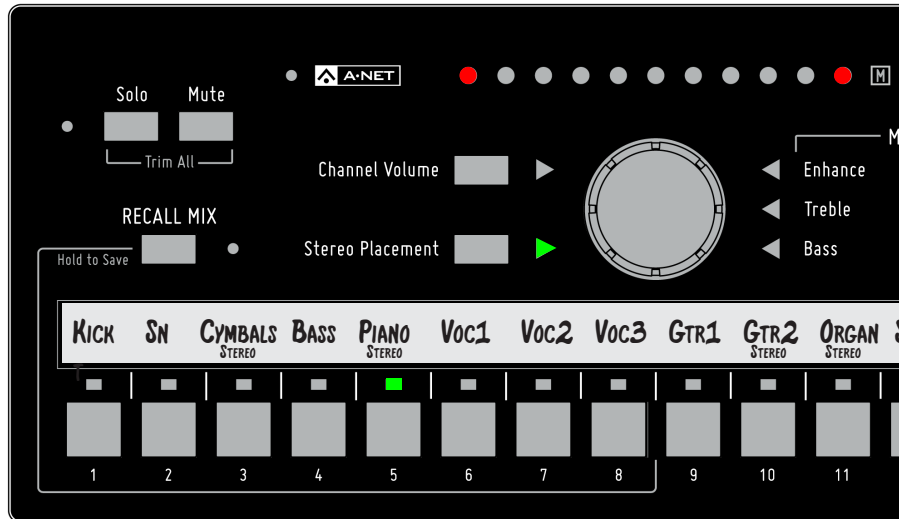

Stereo Placement is being edited on Channel 5.

Mono channels will use a single LED to display panning, while a stereo channel will use a pair of LEDs that indicate the left and right sides of the channel. Stereo Placement settings for each channel in your mix are saved as part of a mix preset.

Adjust the Master Tone Settings

The Master Tone section's Treble, Bass, and Enhance can be used to adjust to overall EQ of your headphones or earbuds. Once you have a basic mix set up, adjust the Treble and Bass tone controls first, leaving the Enhance control set to the minimum. Once you have the treble and Bass tone controls set to your liking, slowly raise the amount of Enhance until you find a pleasing amount. Enhance is a combination bass/treble circuit that boosts the extreme low end and extreme high end of a mix. Press the **MASTER TONE** button to cycle through the three tone options.

The Master Tone section affects the stereo mix output as a whole and its settings are not saved as part of a mix preset.

Save a Mix Preset

Once you have a basic mix set up, it can be saved as a preset for easy recall later. The A320 can store eight mix presets using the first eight channel buttons as storage locations. To save a mix as a preset:

- Press and hold the **RECALL MIX** button.
- Press a channel button 1-8.
- The mix is saved; the A-Net and Recall Mix LEDs flash as a confirmation.




Hold the **RECALL MIX** button and then press a channel button 1-8 to save a mix preset.

A320 Front Panel

The following sections cover the basic functions of the A320's user interface. See "Personal Mixing System Setup" on page 36 for information about adding your A320 Personal Mixer to a new or existing system

Mix Channels

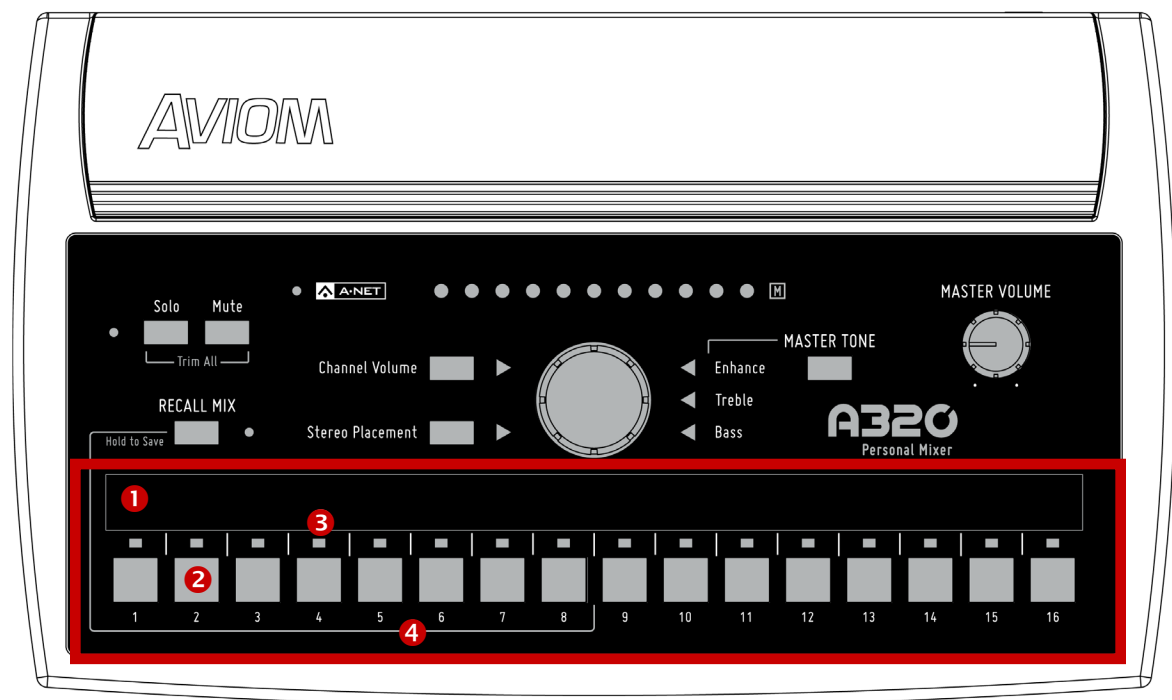

Function	
1	Channel Label Strip
2	Mix Channel Buttons
3	Channel LEDs – green
4	Mix Preset Locations - Channel Buttons 1-8

Channel Label Strip


The channel label strip is designed to accept 1/2-inch (13 mm) wide artist's tape or custom-made labels. A spreadsheet style channel label template is available on the Aviom website. Do not use permanent adhesives or tapes with your Aviom product. See "Mixer Label" on page 50.

Mix Channel Buttons

The 16 mix channel buttons can be assigned either a mono or stereo source, allowing up to 32 input sources to be mixed on the A320 (if each of the 16 mix channels is assigned a stereo source). Stereo links are assigned at the Pro16 or Pro16e input device with the stereo link switches on that device.

To select a channel and make it active for editing, press one of the 16 mix channel buttons; its green LED will light and the green **CHANNEL VOLUME** LED will light. The current volume level for the selected channel will be shown in the horizontal row of red LEDs across the top of the mixer.

Make channel-level changes as needed using the Channel Volume, Stereo Placement, and Mute controls. While editing, the Solo function is also available to isolate the selected mono or stereo channel from the mix. See "Channel Solo" on page 23 for additional information on the Solo function.

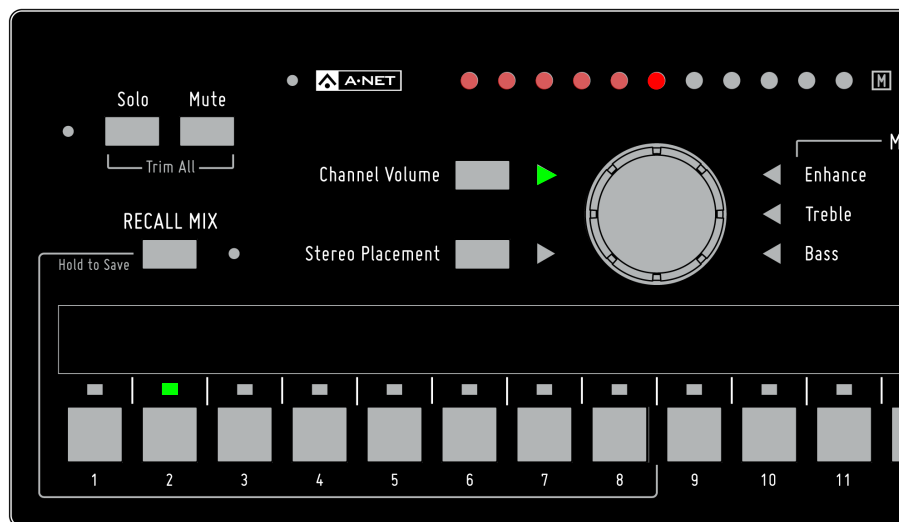


Channel 2 is selected for editing.

Mix Presets

The first eight mix channel buttons also double as Mix Preset storage locations. See "Saving Mix Presets" on page 31 for information on saving and recalling Mix Presets.


16-Channel Vs. 32-Channel Mode

When the A320 is in 32-channel mode, stereo pairs of input channels are mapped to a single channel button on the A320. When a stereo channel is selected, the Stereo Placement feature uses two LEDs to indicate the relative positions of the left and right sides of the stereo signal in your mix.

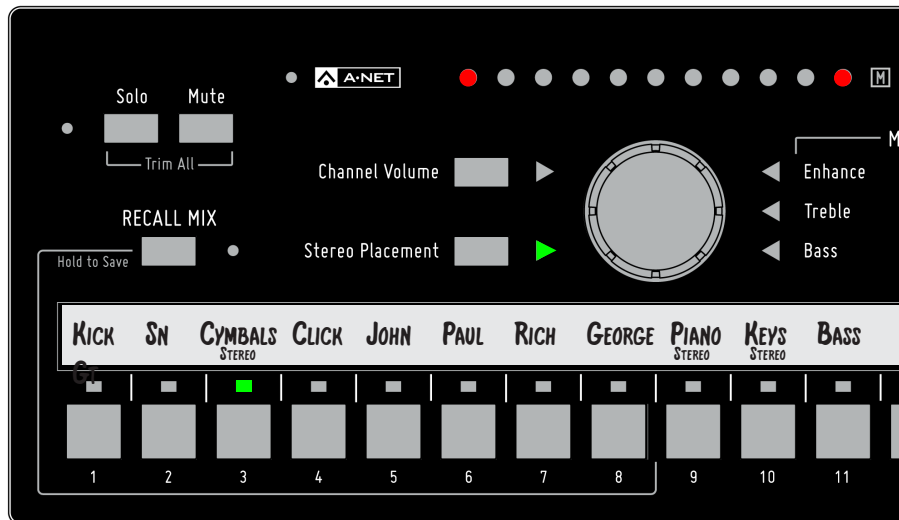

Channel 3 is a stereo input when in 32-channel mode.


When the A320 is in 16-channel mode, a stereo source will be mapped to two adjacent channel buttons (in odd-even pairs). Pressing either channel button will light both buttons, and the stereo channel pair may be edited using the Channel Volume, Stereo Placement, and Mute controls. Pressing the **Solo** button will place both channels into solo, isolating them from the rest of the current mix. See “32-Channel Systems” on page 39 for information about using stereo inputs with the A320.

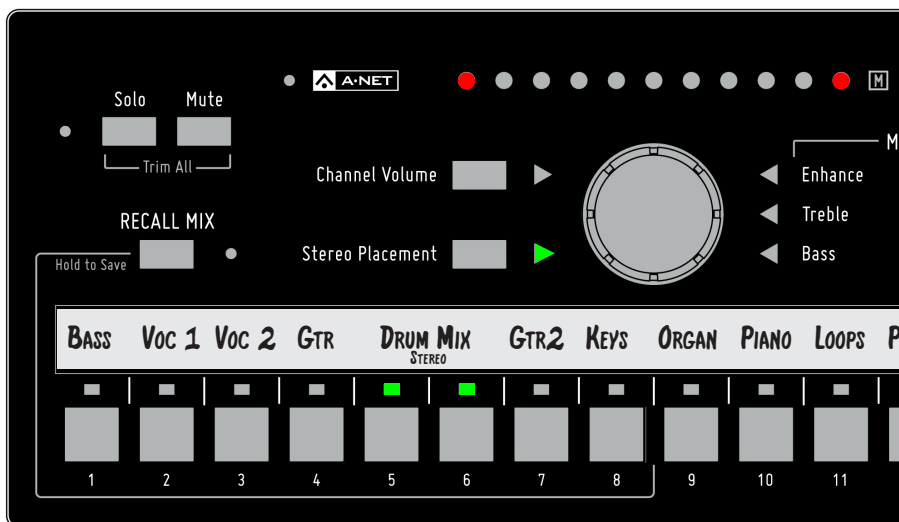

Channel 5-6 are stereo linked at a Pro16 input device when in 16-channel mode.

Channel Controls Section

Each mix channel has Volume, Solo, Mute, and Stereo Placement settings available.

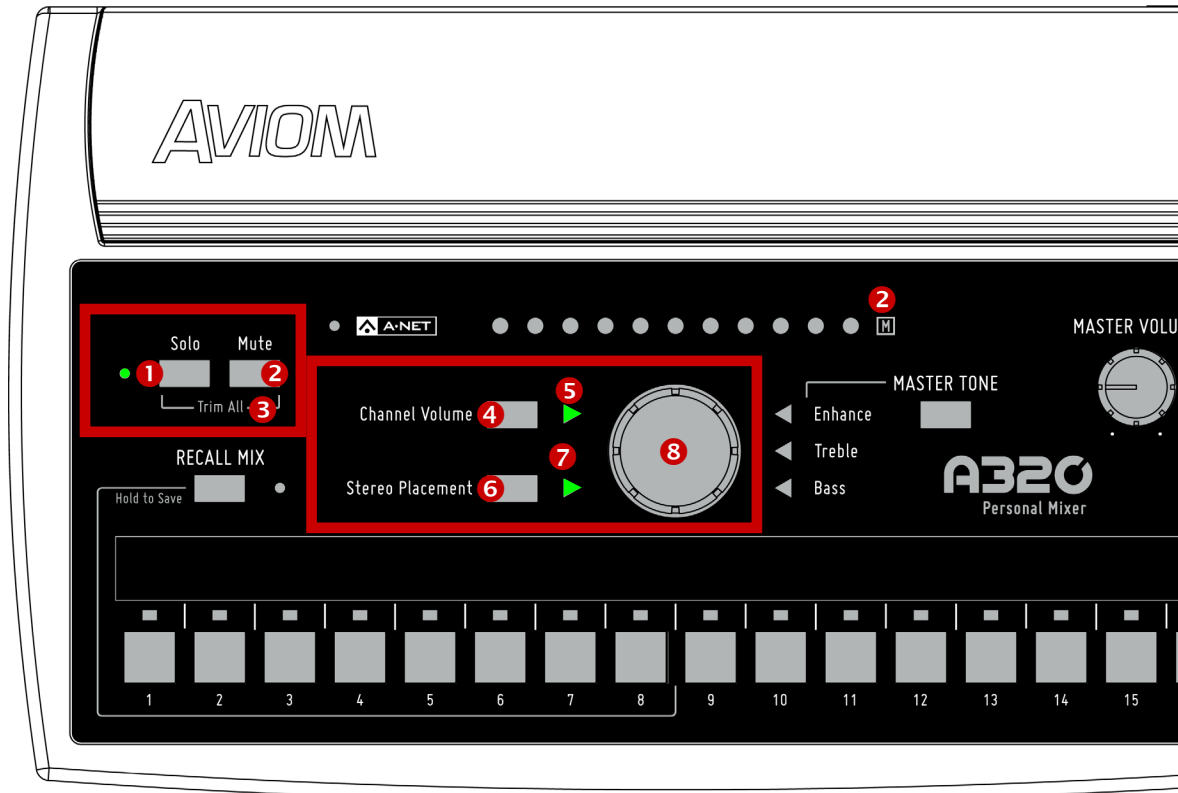

Function	
1	Solo Button with Solo LED - green
2	Mute Button and Mute LED
3	Trim All Function - Solo + Mute
4	Channel Volume Button
5	Channel Volume LED - green
6	Stereo Placement Button
7	Stereo Placement LED - green
8	Central Control Knob

Channel Controls

The individual channel control functions are available whenever one of the 16 mix channel buttons is selected. Volume, Stereo Placement, and Mute settings are saved with a Mix Preset.


Central Control Knob

The large knob in the center of the A320 Personal Mixer is a multi-function rotary encoder that is used for channel-level editing as well as for making changes to the Master Tone settings—Enhance, Treble, and Bass. The function currently assigned to the central control knob is controlled by pressing the Channel Volume, Stereo Placement, and Master Tone buttons. (The green triangle LED next to the currently assigned function will be lit.)

Channel Volume

Each channel's level in the current mix is set with the control knob; the 11 LEDs that run horizontally across the top of the A320 indicate the current volume of the channel and will update in real time as you make changes.

To set a mix channel's level, press its numbered button to select it; the green triangle LED next to the **CHANNEL VOLUME** button will light indicating that the Central Control knob is affecting volume. Turn the central control knob to set the desired level. The red LEDs indicate the current volume for the channel. Two LED brightness levels are used—low and high. Each LED turns on first at its low level and then at its high level. (Only one LED will ever be at its maximum brightness.)

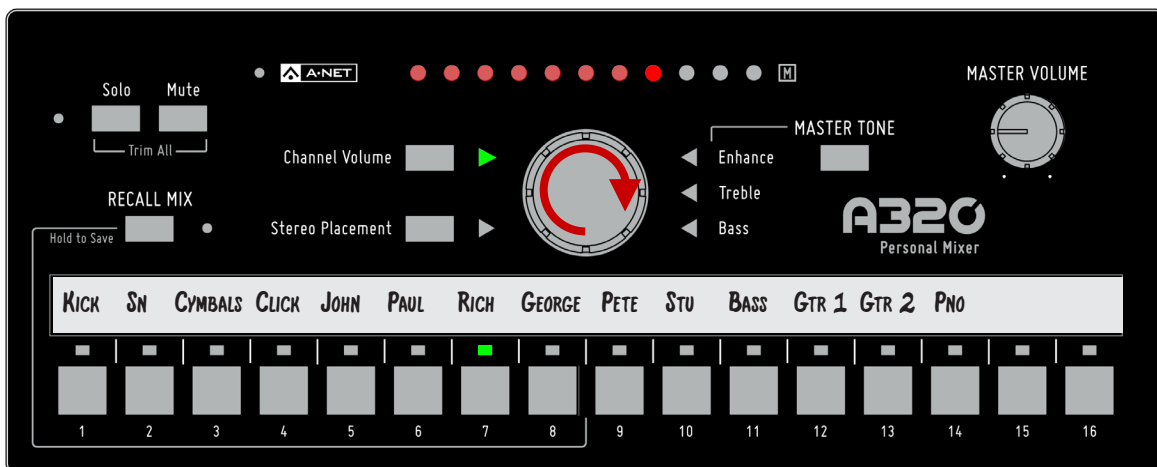

Volume is being edited for channel 7.

To turn a channel off, turn the central control knob fully left until no LEDs are lit. To silence a channel temporarily, use the Mute function.

Stereo Placement

Each channel button on the A320 Personal Mixer can host either a mono or stereo channel when the A320 is set to 32-channel mode. The advantage to this approach is in the simplicity afforded the user. A stereo source such as a piano, drum submix, or the left/right outputs of a stereo guitar processor are easily accessible with a single button press. This powerful feature makes it easy to keep stereo sources intact in a monitor mix rather than forcing the performer to listen in mono to inputs that have valuable stereo spatial information. See “Setting the Mixer Mode” on page 26 for more information.


The Stereo Placement feature controls the selected channel’s position within the current mix’s stereo image. The A320 Personal Mixer offers a unique treatment of the stereo positioning controls for each channel in a mix. Stereo placement on the A320 Personal Mixer uses carefully selected position locations that are musically useful and have been optimized for use with in-ear monitors.

Every audio source can be heard in full stereo fidelity without taking up additional space on the mixer, creating a more realistic monitor mix environment for performers wearing stereo earbuds and headphones. Using stereo sources allows every channel to be positioned precisely in the left-right stereo image and provides a clearer, more accurate mix at a lower volume with no loss of fidelity.


When positioning a mono or stereo channel in your mix, the central control knob uses two encoder clicks per location as it steps through the various options as described below.

Mono Channels

A mono channel’s position in the stereo field is indicated with a single LED that is green when centered, or red when panned left or right.

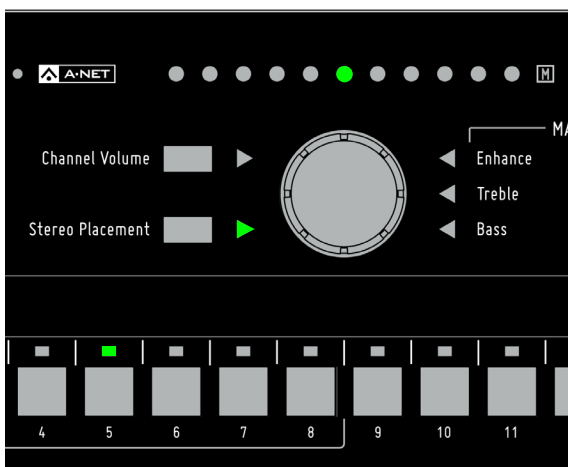

The default centered pan position for a mono channel

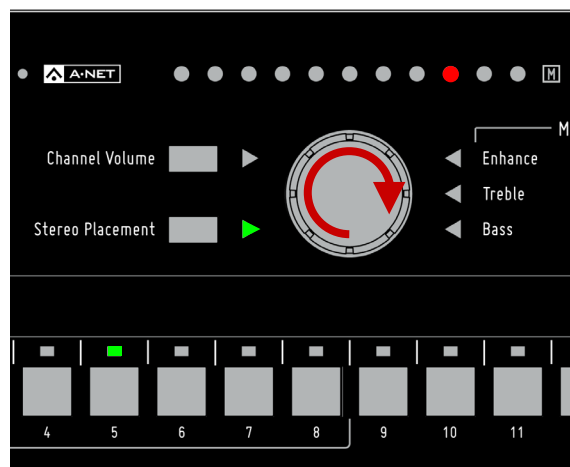

A mono channel shown panned

To position a mono channel, first press the **STEREO PLACEMENT** button; its green triangle LED will light. Turn the central control knob left or right. To return the selected channel to its default center position, make sure that the green Stereo Placement LED is lit, and then turn the central control knob until the green LED is shown in the center of the LED display.

Stereo Channels

Stereo sources are set up at the Pro16 or Pro16e input device feeding the A320 Personal Mixers by simply setting the stereo/mono Link switch for a pair of channels. On the A320, the stereo channel behavior is determined by the mixer mode. See “Setting the Mixer Mode” on page 26.

The Pro16 version of A-Net has a fixed 16-channel maximum, while the Pro16e version offers a pool of up to 64 source channels, connected to up to four input devices. The A320 Personal Mixer can make use of inputs 1-32 in a monitor system that uses more than 32 input channels. Channels 33 and above are only accessible to the A360 Personal Mixer.

Using the A320 in 16-Channel Mode

When a system is configured with a single 16-channel input device (including the original AN-16/i Input Module, AN-16/i-M Mic Input Module, Y1 A-Net Card for Yamaha®, or the console cards built by Aviom partners that use the Pro16 A-Net technology), the A320 should be set to 16-channel mode so that stereo channels are mapped to adjacent channel pairs. Odd-even adjacent mixer channels behave as one. For example, linking inputs 3-4 on a Y1 A-Net Card installed in a Yamaha digital console will cause an A320 mixer’s channels 3 and 4 to light together when either channel button is pressed.

The A320 should always be used in 16-channel mode when a single input module (16 inputs or less) is used to create a personal mixing system.

Using the A320 in 32-Channel Mode

When at least one Pro16e input device (such as the AN-16/i v.2 Input Module) is used to provide 32 inputs to the network, the A320 should be set to 32-channel mode so that stereo sources will be mapped to a single A320 channel button when the input device’s mono/stereo link switches are set to stereo.

When two or more Pro16e input modules or a Dante network are used as the system’s input section, the A320 should be set for 32-channel mode. Each stereo pair will be mapped to a single A320 mix channel button. Up to 16 stereo channels are possible when all input pairs are set to stereo.

Compatibility

When at least one AN-16/i v.2 is used to create a system with multiple input devices, the first 16 input channels of the network may come from any device that outputs the Pro16 version of A-Net including: the original AN-16/i, AN-16/i-M, AV-M8, Y1 A-Net Card, partner console cards, or the Pro64 ASI A-Net Systems Interface. Connecting the A-Net Out from one of these Pro16 devices to the A-Net In on the AN-16/i v2 causes the data to be merged inside the AN-16/i v.2 and output as a Pro16e packet.


When a D800 or D800-Dante A-Net Distributor is used, multiple digital console cards from the same clock source may be connected to an SB4 System Bridge. The System Bridge’s output may be connected to the A-Net In on the D800; the data streams will be merged by the D800 and transmitted from its A-Net outputs. The D800 always outputs the Pro16e version of A-Net.

✓ **NOTE:** The A320 Personal Mixer can use only input channels 1-32 of any personal mixing network that has more than 32 input sources.

Understanding Stereo Placement on the A320

When Stereo Placement is selected for editing, two red LEDs are used to indicate the location of the sources within the stereo image. The default spread for a stereo source is full left and full right.

The following example shows the eleven relative Stereo Placement positions available for a stereo channel. As you change the Stereo Placement setting for a channel, you'll notice that the center-panned options appear twice—as you move from the left side of the stereo image to the right and again as you move from the right back to the left.

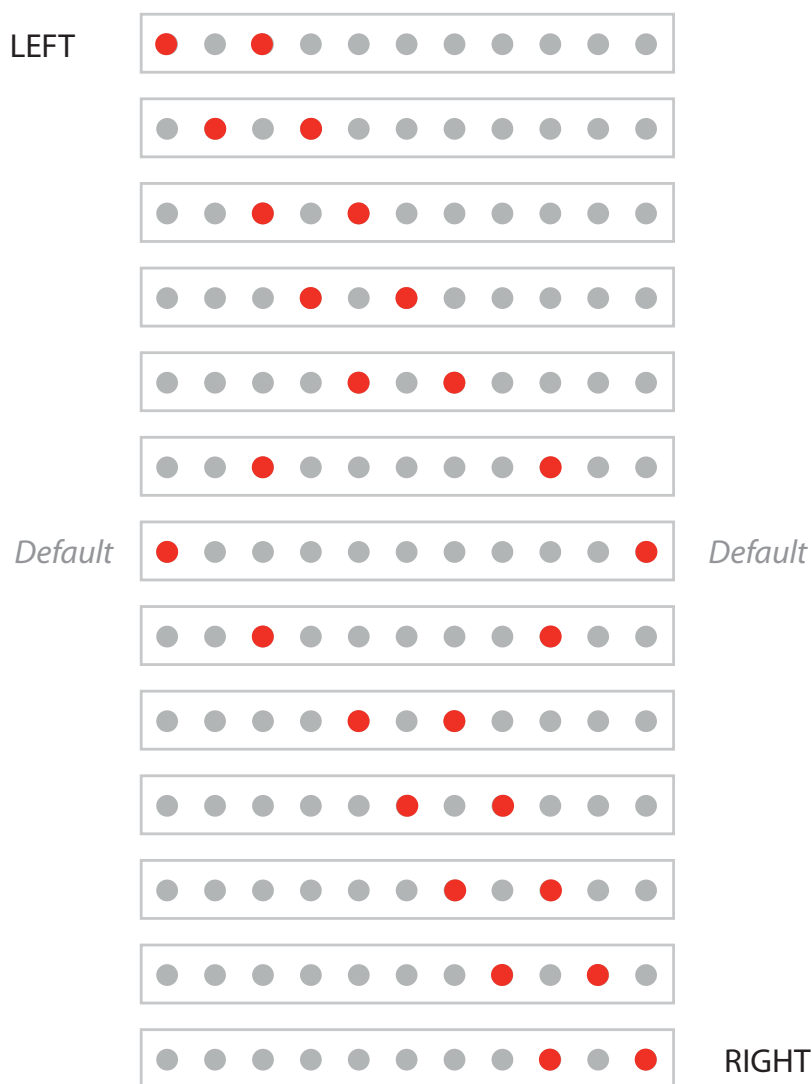

The A320 Stereo Placement LED positions

The stereo positions have been carefully selected to be both easy to use and musically useful while performing live on stage or in the studio.

Channel Mute

Any mix channel on the A320 can be muted. To mute the selected channel, press the **MUTE** button. The yellow Mute **M** icon blinks to indicate that the channel is muted in the current mix as long as the channel is selected (or whenever the channel is re-selected). The Mute setting for each channel will be saved when you store a mix preset.

Any number of mix channels may be muted while making a mix. To mute additional channels in the current mix, simply select a channel's mix button and then press the **MUTE** button.

To unmute a channel, select the channel first (its green LED above the channel button will light and the Mute **M** icon will be flashing) and then press the **MUTE** button. The channel can be heard again in the mix. While muted, a channel's Volume and Stereo Placement settings can still be edited, but these changes will not be heard until the channel is unmuted.




Channel 4 is muted; the Mute LED is flashing as long as Channel 4 is selected.

✓ **TIP:** To clear a mix, press the **RECALL MIX** button and then press the **MUTE** button. Refer to “Clear a Mix” on page 33 for more information.

Channel Solo

Pressing the **Solo** button on the A320 allows the selected mono or stereo channel to be heard alone without affecting the rest of your mix. If the A320 Personal Mixer is used in 16-channel mode, two adjacent channels are used to create a stereo pair. Pressing the **Solo** button when a stereo linked pair is selected on the A320 will cause both channels to enter Solo Mode.

The green Solo LED next to the **Solo** button will flash while a channel is in solo. Edit channel volume or Stereo Placement settings as needed. To exit Solo Mode and return to the full stereo mix, press the **Solo** button again. The green Solo LED will stop flashing.

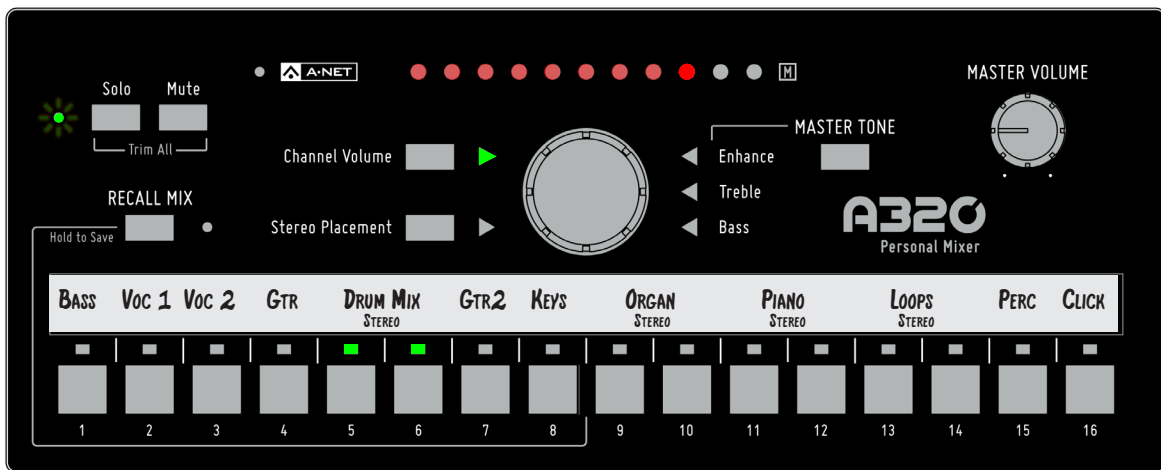

A stereo channel, 5-6, is in Solo Mode; the Solo LED is flashing.


To isolate a different channel, press its channel button at any time while the Solo LED is flashing. The new channel enters Solo, replacing the previous channel. Only one mono or stereo channel may be in Solo at a time. Muted channels in the mix will be temporarily unmuted when placed in Solo; the channel's **MUTE** LED will go out while the channel is in Solo. Note that you cannot mute a channel while it is in Solo mode; the Solo LED will flicker briefly as a reminder.

To exit Solo mode, press the **Solo** button; the Solo LED stops flashing and you are returned to the full mix.

Trim All Function

The Trim All function is an easy way to turn down the volume of all channels in a mix by a uniform amount with a single command. Use Trim All if a channel being edited is already at its maximum level and you want to continue to raise its volume relative to the other elements in the current mix.

To use Trim All, simultaneously press the **Solo** and **Mute** buttons. Each press of this button combination lowers all channel volumes by 3dB.

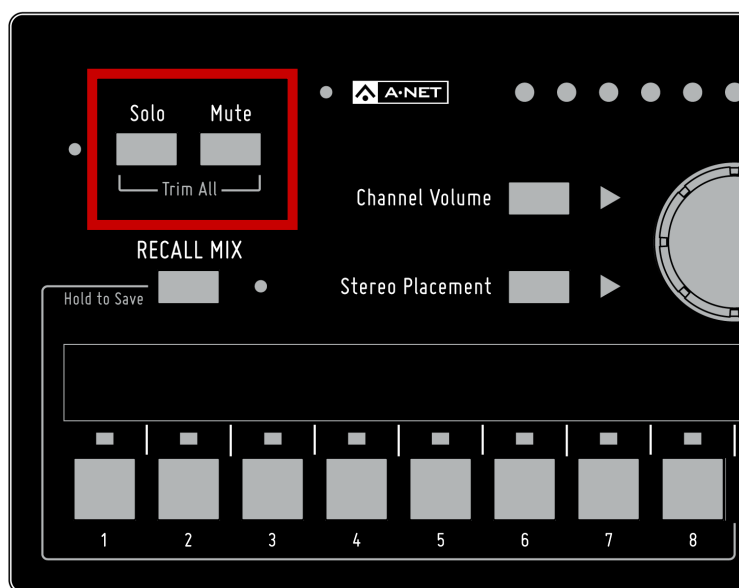


All channel volumes are lowered by 3dB when you use the Trim All command.

Once the mix has been trimmed by the desired amount, you can continue making mix adjustments as needed. After using the Trim All function as described above, you may need to raise the Master Volume level to compensate for the lower overall mix level.

Master Section

The master section of the A320 Personal Mixer’s interface includes the A-Net LED and the global controls for master volume and tone.

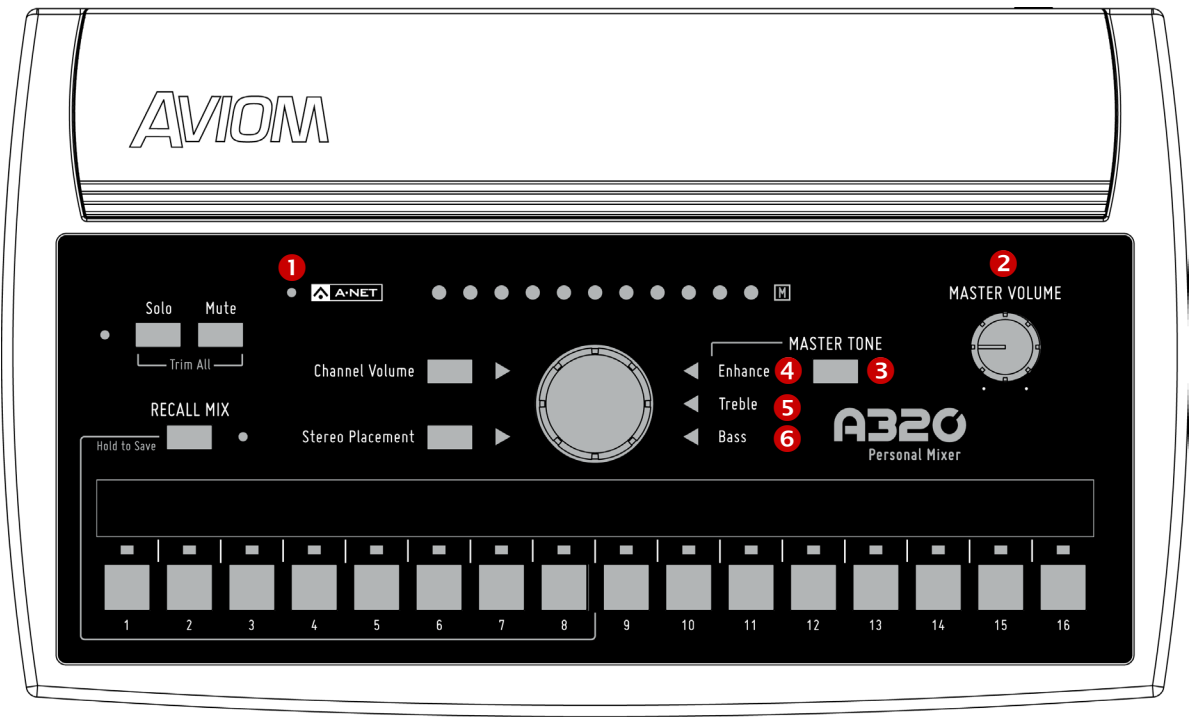

Function	
1	A-Net LED, bi-color green/red
2	Master Volume Control
3	Master Tone Button
4	Enhance Tone Control LED, green
5	Treble Tone Control LED, green
6	Bass Tone Control LED, green

A-Net and the A320

The A320 Personal Mixer can operate in one of two modes—the 16-channel maximum Pro16 version where each channel is assigned to one mix channel button (and stereo channels, therefore, occupy a pair of adjacent channels), or the 32-channel Pro16e mode where stereo channel pairs occupy a single mix button on the A320 interface. Which mixer mode you will use will depend upon the type and number of input devices that make up your personal mixing system.


If your personal mixing system has only 16 input sources and uses a single analog input module or digital console card, use the 16-channel mode. If you use a Dante network, use the 32-channel mode. If your system has two or more input devices and at least one of them is a Pro16e device such as the AN-16/i v.2 Input Module, then you can make use of the 32-channel (Pro16e) version of the protocol. (Remember that the A320 can only use slots 1-32 of a larger Pro16e network; slots 33-64 can be accessed only by the A360 Personal Mixer.)

A-Net LED

The A-Net LED on the A320 Personal Mixer will light green when it is receiving the Pro16 version of A-Net; it will light red when the Pro16e version is being received.

Setting the Mixer Mode

To choose a mixer mode, a special power-up button combination is used. Start with the power off (disconnect the Cat-5 cable from the back of the mixer). To set the A320 to use the 16-channel mode, hold the **MUTE** button and the **CHANNEL 1** mix button and then power up the unit. To use the 32-channel mode, start with the power off, hold the **MUTE** button and the **CHANNEL 2** mix button and then power up the unit.

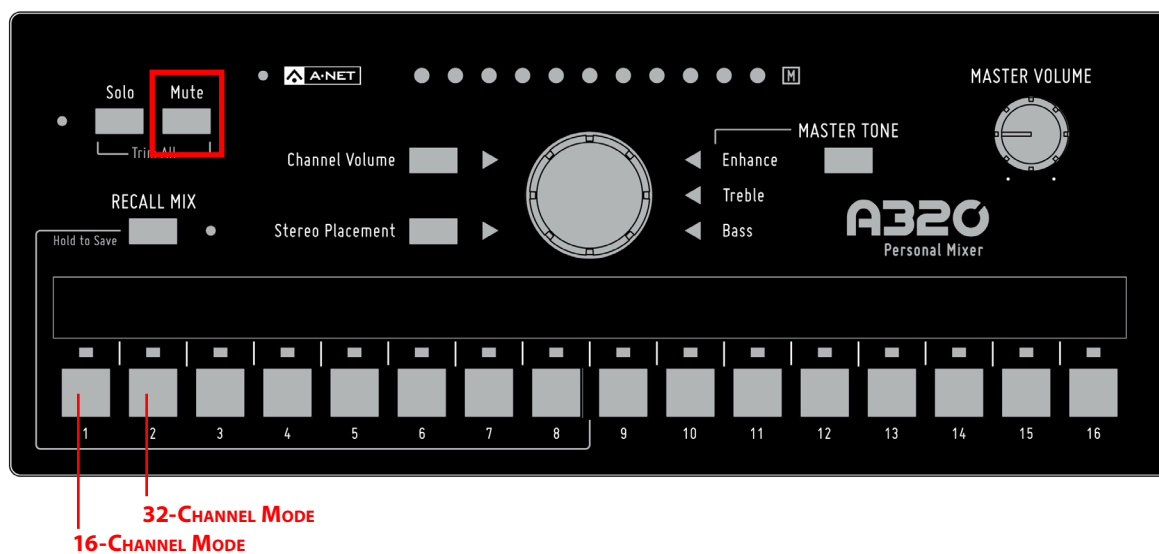

On power up, holding **MUTE** and **CHANNEL 1** sets the A320 to 16-channel mode; holding **MUTE** and **CHANNEL 2** sets the A320 to 32-channel mode.

-
- ✓ **NOTE:** When the mixer mode is changed, the A320 is completely reset. This clears all volume, stereo placement, and mute settings from the current mix and also resets the eight mix presets to default values.
-

Troubleshooting Mixer Modes

The A320 cannot be damaged by choosing the wrong mixer mode, but the channel mapping may not be what you expect. Here is how the A320 will react:

- If **Pro16** A-Net packets are received while the A320 is in 32-channel mode, only the first 8 mix channel buttons are usable. Pressing mix channel buttons 9-16 will flicker the red A-Net LED to indicate that you are trying to access network slots that are not available in the 16-channel Pro16 packet.
- If **Pro16e** A-Net packets are received in 16-channel mode, only the first 16 slots from the packet are available. The upper slots (17-32) and any associated stereo links will be ignored.
- When **Pro16e** A-Net packets are received while the A320 is in 32-channel mode, and those packets include slots from 33-64 (which *can* be used by the A360 Personal Mixer), slots 1-32 are used and slots 33-64 are ignored.

-
- ✓ **NOTE:** The A360 will briefly display the mixer mode during power up. A green A-Net LED indicates 16-channel mode (the factory default), and a red A-Net LED indicates 32-channel mode.
-

Master Volume

The Master Volume control sets the level for the 1/4-inch Stereo Mix Out jack on the rear panel. The Master Volume level is an analog control and is not saved as part of a Mix Preset.


Master Tone Button

The Master Tone button is used to select one of the three tone settings—**ENHANCE**, **TREBLE**, or **BASS**—for editing. Pressing the button will cycle through the three options, lighting the green triangle LED next to the current selection.

Enhance Tone Control

Enhance is a specially developed bass and treble EQ curve designed to increase low-end punch and high-end brilliance in a mix. It is especially useful for performers listening through in-ear monitors.

The default position for the Enhance control is fully left with no LEDs lit—off. To use the Enhance control, start by creating a mix with the control in the full off (counterclockwise) position. Set the Master Tone Treble and Bass as desired. Press the **MASTER TONE** button to light the green LED next to **ENHANCE** and select it for editing. Then start raising the Enhance amount slowly while listening to the mix until you find an amount that's pleasing.

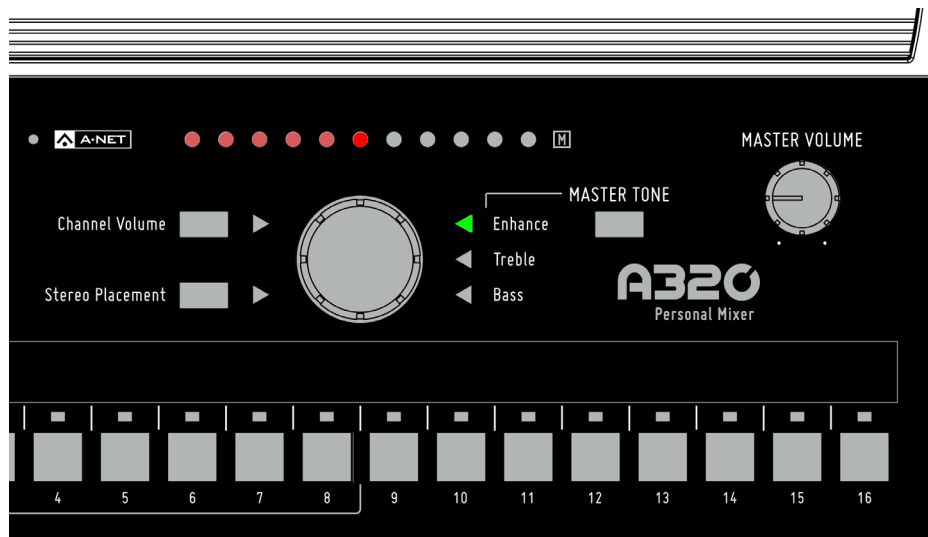

When the Enhance LED is lit, turn the central control knob to change the amount of Enhance applied to the mix.

The Enhance tone control amount is not saved with a Mix Preset.

Treble Tone Control

Use the Treble tone control to add or subtract high frequencies from the stereo mix output. The default (flat) setting for the Treble tone control is at the center of the LED display; a green LED is shown.

To change the amount of treble frequencies in your mix, press the **MASTER TONE** button until the **TREBLE** LED is lit and then turn the central control knob left to remove treble or right to add it. The amount of treble adjustment is shown with a red LED.

The Treble tone control's amount is not saved with a Mix Preset.

Bass Tone Control


The master section's Bass tone control adds or subtracts low frequencies from the stereo mix output. It is designed as overall tone compensation for the headphones, earbuds, or speaker systems connected to the A320 Personal Mixer.

The default setting for the Bass tone control is at 12 o'clock (flat). To change the amount of bass frequencies in your mix, press the **MASTER TONE** button until the **BASS** LED is lit and then turn the central control knob left to remove bass or right to add it. The amount of adjustment is shown with a red LED.

The Bass tone control's setting is not saved as part of a Mix Preset.

Mix Presets

The A320 can save up to eight separate mixes as presets. These presets are accessed using the first eight mix channel buttons, which double as preset location buttons. The A320 will also preserve the last mix settings when the mixer is powered down.

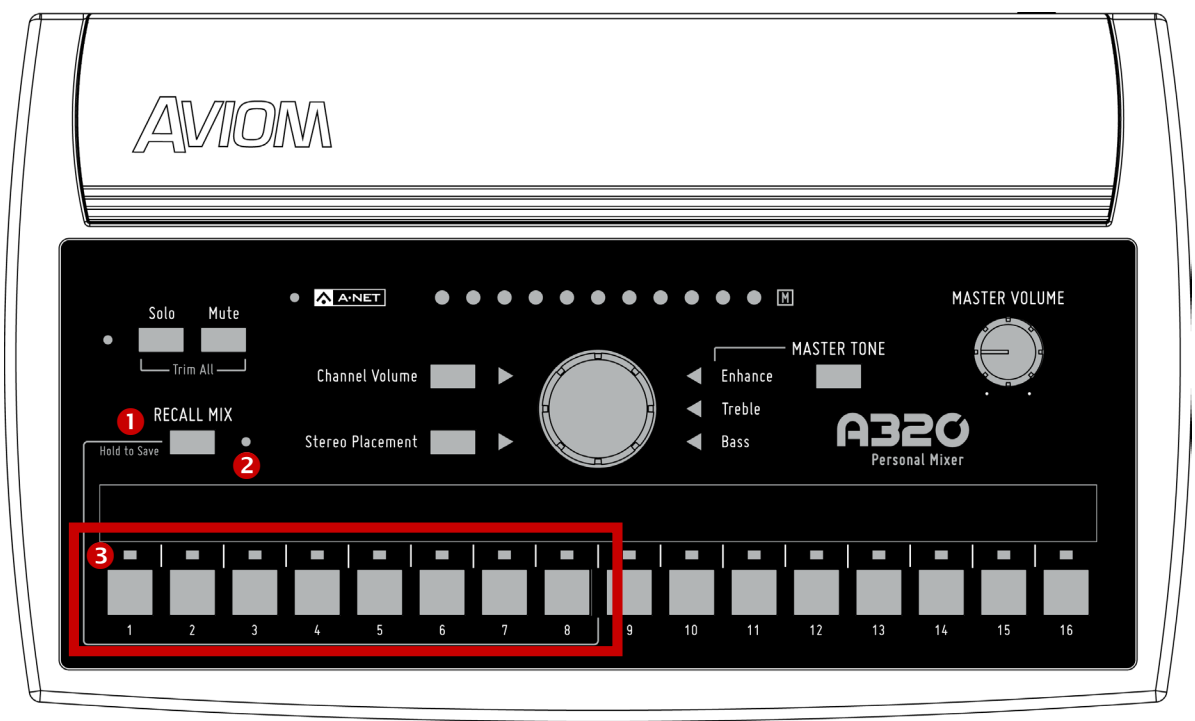

Function	
1	Recall Mix Button (Hold to Save)
2	Recall Mix LED
3	Mix Preset Memory Locations 1-8


Saving Mix Presets

The A320 Personal Mixer can save up to eight Mix Presets using the channel select buttons numbered 1-8 as storage locations. Mixes are retained in the A320 even when the mixer is powered down.

To save a mix to one of the channel buttons numbered 1-8:

1. Hold down the **RECALL MIX** button to activate the Save function
2. Note that the LED next to the **RECALL MIX** button does not blink.
3. While still holding the **RECALL MIX** button, press one of the first eight channel buttons.
4. As a confirmation, the **RECALL MIX** and **A-NET** LEDs will blink briefly.

While holding the **RECALL MIX** button, you can store a mix to multiple locations if desired. Each save action will display the confirmation message (the **RECALL MIX** and **A-NET** LEDs will blink). While saving a mix reset, buttons 9-16 are ignored; they are not valid mix preset locations.

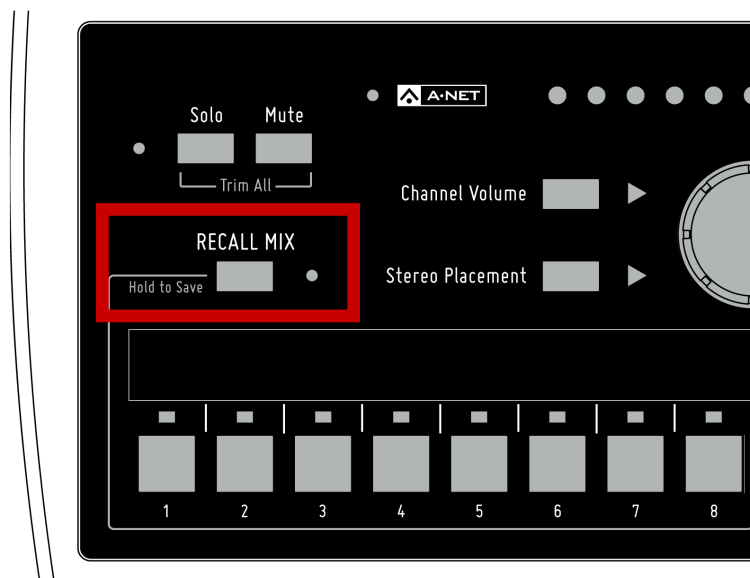

Hold the Recall Mix button and press a mix channel 1-8 to save a mix preset.

✓ **NOTE:** Using the Save function will cancel Solo mode.

What Gets Saved in a Mix Preset

The following settings are saved when a Mix Preset is created:

- Channel Volume for all channels
- Channel Stereo Placement for mono channels
- Channel Stereo Placement for stereo channels
- Channel Mute on/off
- Last selected mix channel

Settings Not Saved in a Preset

The following are not saved when a Mix Preset is created:

- Master Volume level
- Master Bass tone control amount
- Master Treble tone control amount
- Enhance tone control amount
- Solo mode

Recall Mix Button

The **RECALL MIX** button has two functions on the A320. When pressed and released, it activates the Recall Mix function. When held, the Save function is activated.

To Recall a Mix Preset

To recall a Mix Preset that has been stored in one of the A320 Personal Mixer's mix locations (the channel buttons 1-8):

1. Press and then release the **RECALL MIX** button; its yellow LED will blink.
2. Press the channel button 1-8 that corresponds to the mix you wish to recall (buttons 9-16 are ignored).
3. The mix is recalled and the yellow LED next to the **RECALL MIX** button goes out.
4. To cancel a mix recall, press the **RECALL MIX** button again instead of a channel button 1-8.


Clear a Mix

The current mix can be cleared and reset by pressing and releasing the **RECALL MIX** button and then pressing the **MUTE** button, returning all channel settings to their default values. Resetting a mix does not erase the mix parameters stored in memory for any of the eight Mix Preset locations. To overwrite a Mix Preset after performing a reset, use the Save procedures described previously.

This command resets the following:


- Channel volumes are set to zero
- All channels are unmuted
- Stereo Placement (Pan) for all mono channels is set to center
- Stereo Placement for all stereo channels is set to full left/right
- Channel Button 1 is selected

The Master Volume and Master Tone settings are not affected by this command.

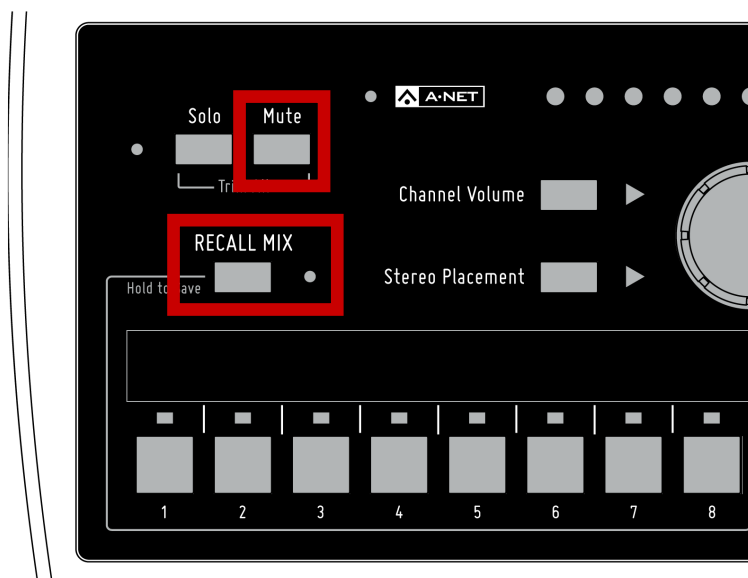

Press **RECALL MIX** and then press **MUTE** to clear the current mix.

A320 Personal Mixer Rear Panel

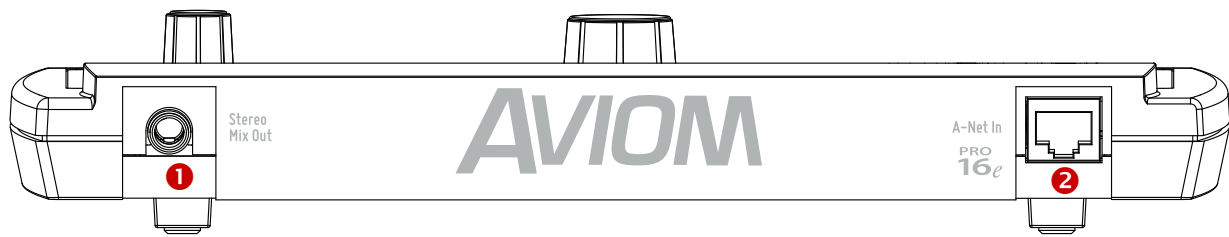

Function	
1	Stereo Mix Out – 1/4-inch TRS
2	A-Net In – RJ45

Rear Panel Features

This section details the function of each of the rear panel features on the A320 Personal Mixer.

Stereo Mix Out

A 1/4-inch TRS Stereo Mix Out jack is provided for direct connections to earbuds and headphones. The TRS output may also be used as a line-level output when connecting the Stereo Mix Out to a wireless in-ear transmitter or a set of powered stereo speakers. A TRS to dual TS splitter cable is required for this application (sometimes referred to as an insert cable or Y-cable). A splitter cable provides separate unbalanced left and right signals to the inputs of the receiving device.

✓ **NOTE:** Do not connect the TRS output from the Stereo Mix Out jack to a balanced mono input. A balanced audio input is differential—it subtracts the positive signal from the negative signal to remove any noise and interference picked up in the cable. The TRS Stereo Mix Out is not a balanced signal.

A-Net In

The Cat-5 A-Net In port is fitted with a standard RJ45 jack, and accepts either Pro16 or Pro16e A-Net data. The A320 also receives DC power over the same Cat-5e data cable. An external DC power supply is not required.

✓ **NOTE:** When the A320 is connected to an A-Net Distributor, the type of A-Net received (Pro16 or Pro16e) is dependent on the input device that is supplying A-Net to the distributor. Both data types are compatible with the A-Net Distributors.

See “Setting the Mixer Mode” on page 26 for information on setting the A320 to 16-channel or 32-channel operation.


Personal Mixing System Setup

This section explains how the A320 Personal Mixer integrates with other Pro16 devices (from Aviom or third-party partners) to create a personal mixing system. See the detailed User Guides that came with the Aviom products mentioned in this section for complete information about their use, features, and setup.

Pro16e Personal Mixing Systems

The A320 Personal Mixer uses the enhanced version of A-Net, Pro16e, which allows up to 64 audio sources to be included in the network pool by using up to four 16-channel input devices. Each A320 in a personal mixing system can use the first 32 Slots of the network; Slots 33-64 can only be utilized by the A360 Personal Mixer and are ignored by the A320.

A basic monitor system that includes the A320 consists of three elements—an input device (analog or console card), an A-Net Distributor, and one or more personal mixers.

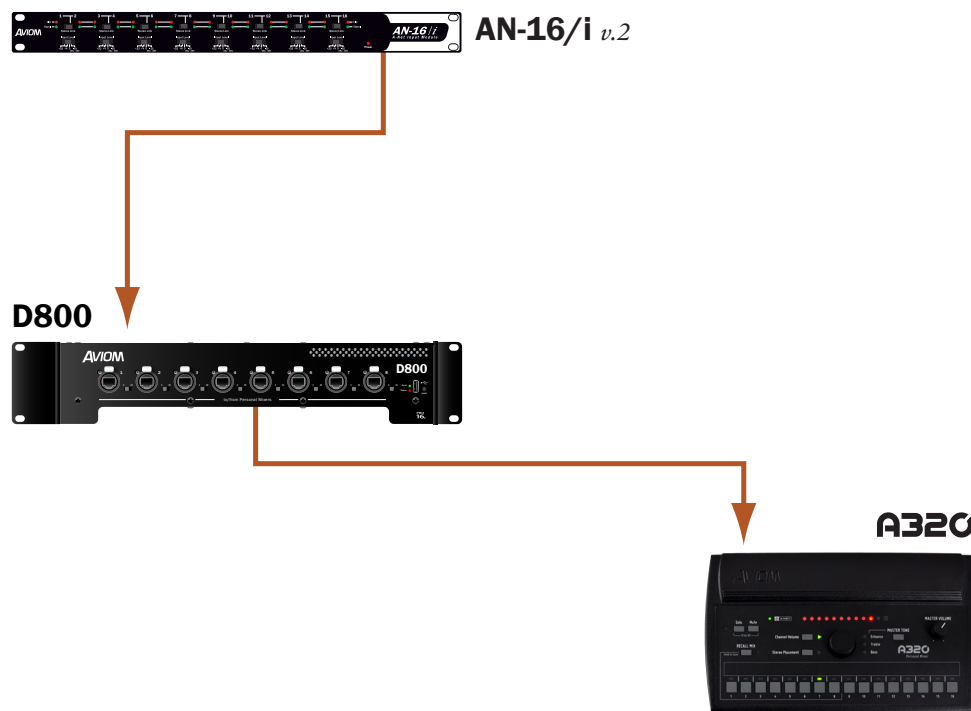


A basic monitor system with one A320 Personal Mixer

16-Channel Systems

When a single analog input module or console card is used with A320 Personal Mixers, the A320 should be set to 16-channel mode (hold **MUTE** and **CHANNEL 1** on power up). Each input channel on the input device is mapped to one mix channel button in sequential order. For example, if the input source connected to channel 1 of an AN-16/i v.2 Input Module is a bass, that bass signal will appear on button 1 of the A320.

How Stereo Links Work in a 16-Channel System

The Pro16 version of A-Net allows a total of 16 channels to be sent from an input device to personal mixers. Stereo links are treated as channel pairs, using two adjacent buttons on the A320.

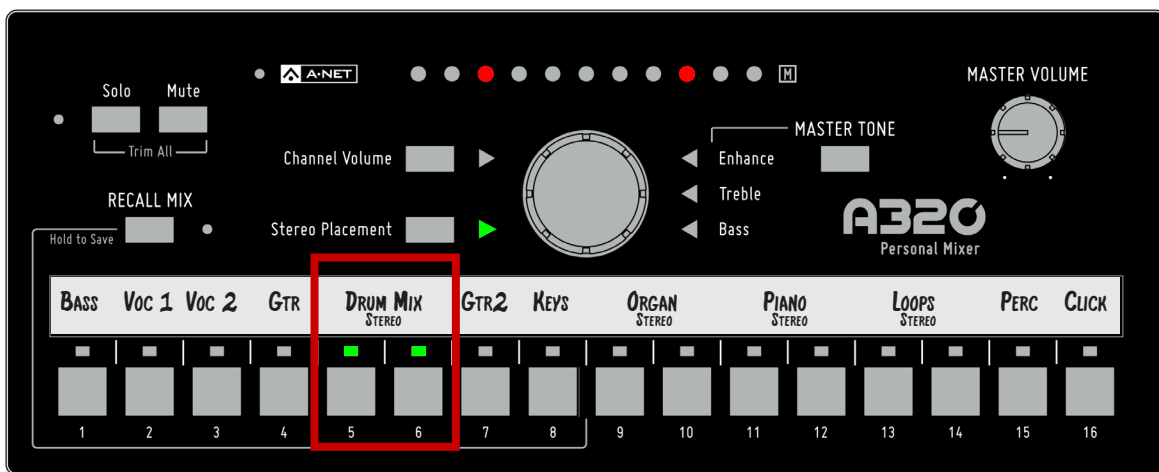


Channels 5-6 are a stereo linked pair in a system with only one input module.

See additional information about the Pro16 and Pro16e versions of A-Net on page 27.

✓ **NOTE:** When connecting the A320 Personal Mixer to a D800 or D800-Dante A-Net Distributor, the D800's front panel switches must be set to the "I" position. The "II" position is for use only with the A360 Personal Mixer.

Parallel Connections

Using one or more A-Net Distributors allows any number of Personal Mixers to be integrated into a personal mixing system.

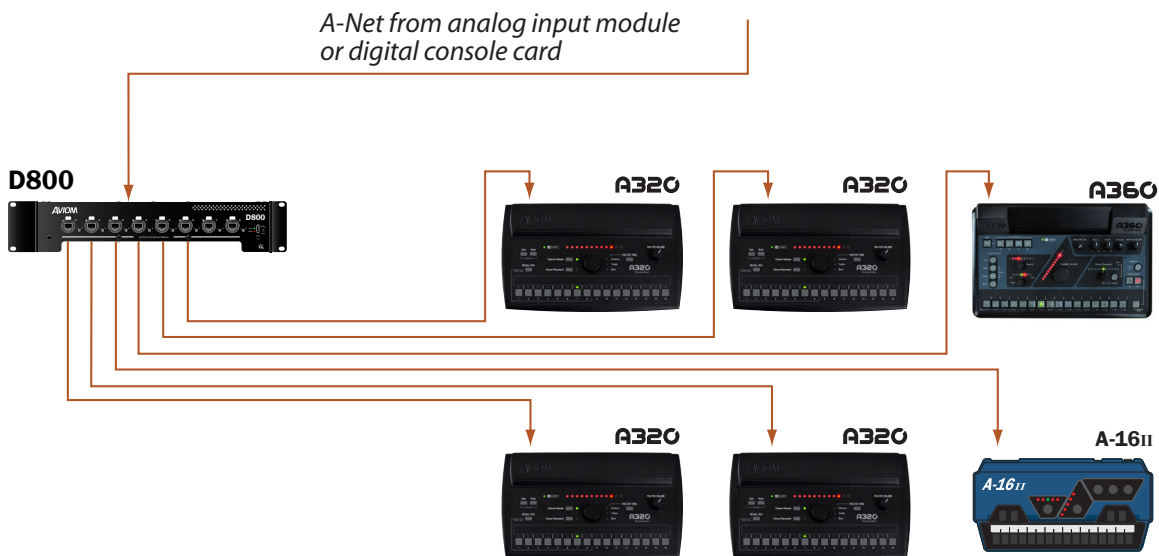

An A-Net Distributor allows Personal Mixers to be connected in parallel.

In addition to Pro16 analog devices and console cards, the Pro64 ASI A-Net Systems Interface may be substituted for the input devices seen in the diagrams that follow. Any of the ASI's four Pro16 A-Net outputs may be used.

Adding the A320 to an Existing System


The A320 Personal Mixer can be added to existing 16-channel personal mixing systems that use the A360 and/or A-16II Personal Mixers and contain at least one A-Net Distributor. (The A320 gets its power from an A-Net Distributor and cannot be used in a system without an A-Net Distributor.)

Most 16-channel personal mixing systems use the same basic setup—an input device (analog or a digital console card) is used to generate an A-Net digital signal which is connected to an A-Net Distributor. Personal Mixers are connected to the ports on A-Net Distributor. Remember that when using a D800 or D800-Dante, the front panel switches need to be in the "I" position when connecting an A320.

32-Channel Systems

When multiple input devices are combined to create a network with more than 16 input sources, the A320 can use the first 32 network slots and will ignore any slots above 33. The A320 must be placed into 32-channel mode to allow the 32 inputs to be recognized. This is also true when using the A320 with Dante devices. See “Setting the Mixer Mode” on page 26 for additional information.

Each 16-channel input module or digital console card can provide 8 stereo pairs if all Stereo Link switches are set for stereo.

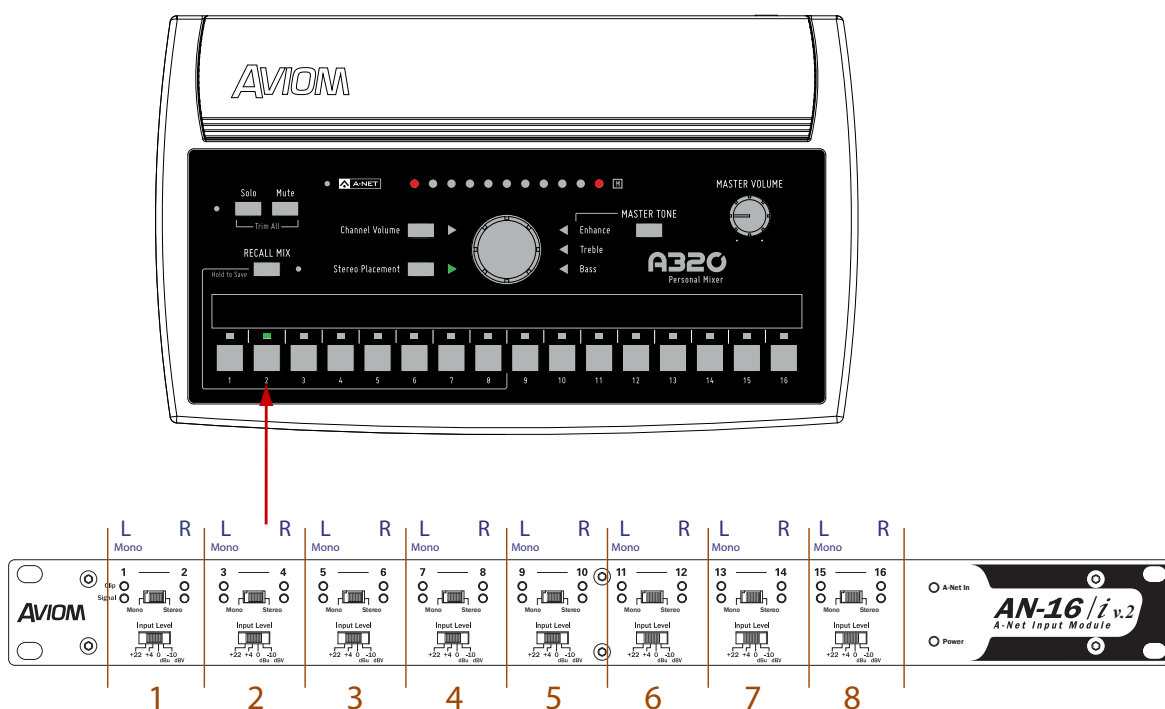

Each channel pair of an input module provides either a mono or stereo source for an A320 mix button, as determined by the Mono/Stereo link switch. When set to mono, the right side input is ignored when the A320 is in 32-channel mode.

How Stereo Links Work in 32-Channel Systems

When channels are stereo linked on an input module, both channels appear as a stereo pair, on one mix channel button on the A320. The table shows the mapping of 32 input sources to A320 buttons.


AN-16/i v.2		Default A320 Channel	
Bank	Channel	If Stereo	If Mono
1-16	1	1 (left)	1
	2	1 (right)	Ignored
	3	2 (left)	2
	4	2 (right)	Ignored
	5	3 (left)	3
	6	3 (right)	Ignored
	7	4 (left)	4
	8	4 (right)	Ignored
	9	5 (left)	5
	10	5 (right)	Ignored
	11	6 (left)	6
	12	6 (right)	Ignored
	13	7 (left)	7
	14	7 (right)	Ignored
	15	8 (left)	8
	16	8 (right)	Ignored
17-32	1	9 (left)	9
	2	9 (right)	Ignored
	3	10 (left)	10
	4	10 (right)	Ignored
	5	11 (left)	11
	6	11 (right)	Ignored
	7	12 (left)	12
	8	12 (right)	Ignored
	9	13 (left)	13
	10	13 (right)	Ignored
	11	14 (left)	14
	12	14 (right)	Ignored
	13	15 (left)	15
	14	15 (right)	Ignored
	15	16 (left)	16
	16	16 (right)	Ignored

If the channels are *not* stereo linked, then only the odd (left) input channel is utilized by the A320, and the even (right) input channel is ignored.

Using Multiple Input Devices

When using multiple input devices in a personal mixing system, each input device provides one 16-channel bank of slots to the network. The Slot Range switches on the rear panel of the AN-16/i v.2 control the bank assignment. Up to four input devices may be used to create a pool of 64 slots, but remember that the A320 cannot access slots 33-64.

The system shown below shows 32 input sources being used by a variety of personal mixers.

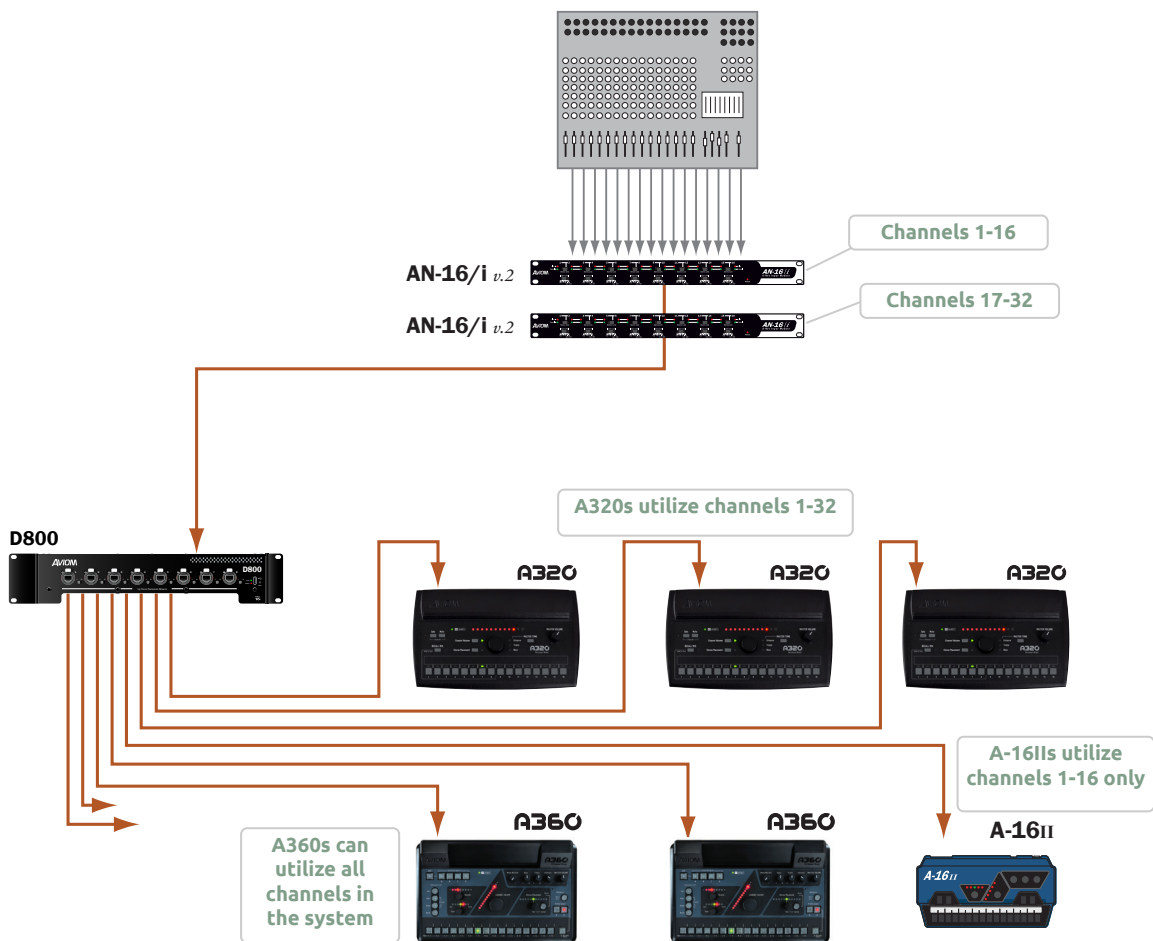


A 32-input personal mixing system with A320 Personal Mixers along with the A360 and A-16II Personal Mixers

✓ **NOTE:** The A320 Personal Mixer can use Slots 1-32 of a network with multiple input devices. Only the A360 Personal Mixer can use network Slots 33-64.

When using a Dante network, stereo links must be set on the A-Net Distributor.

Slot Range Setup

Each input device in a Pro16e-based personal mixing system supplies one bank of 16 channels to the network. The **SLOT RANGE** switches on the AN-16/i v.2 are used to set the assignment for each; the physical location of the device within the daisy chain does not matter as long as the Slot Range switch settings are correct. Each input module is daisy chained, connecting a Cat-5 cable from its **A-NET OUT** to the **A-NET IN** of the next input device in the chain.

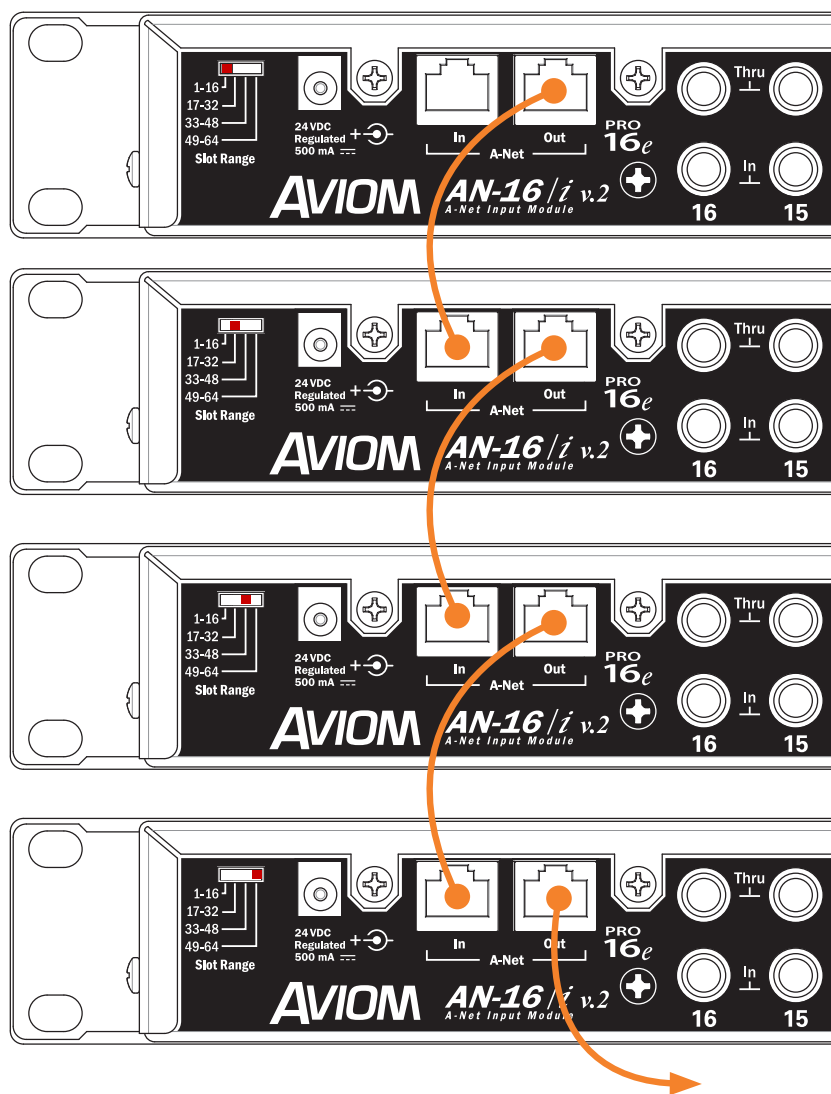


Slot Range switches for each input device in a 64-input system are shown. A legacy Pro16 device may be substituted for the first bank of 16 channels.

Connect the **A-NET OUT** of the last input device in the chain to the **A-NET IN** of the A-Net Distributor. The A320 Personal Mixers are then connected to the distributor's **A-NET OUT** ports. Remember that an A320 Personal Mixer can only use the first 32 slots of an expanded network.

A legacy Pro16 device may be substituted for the first bank of 16 slots in a daisy chain of input devices. It will automatically default to supplying the first 16 slots to the network pool.

64-Channel Systems

The diagram below shows a 64-input system. The A320 Personal Mixers use inputs 1-32 only; the A360 Personal Mixer can use any slot in the network when configured in its Custom mode.

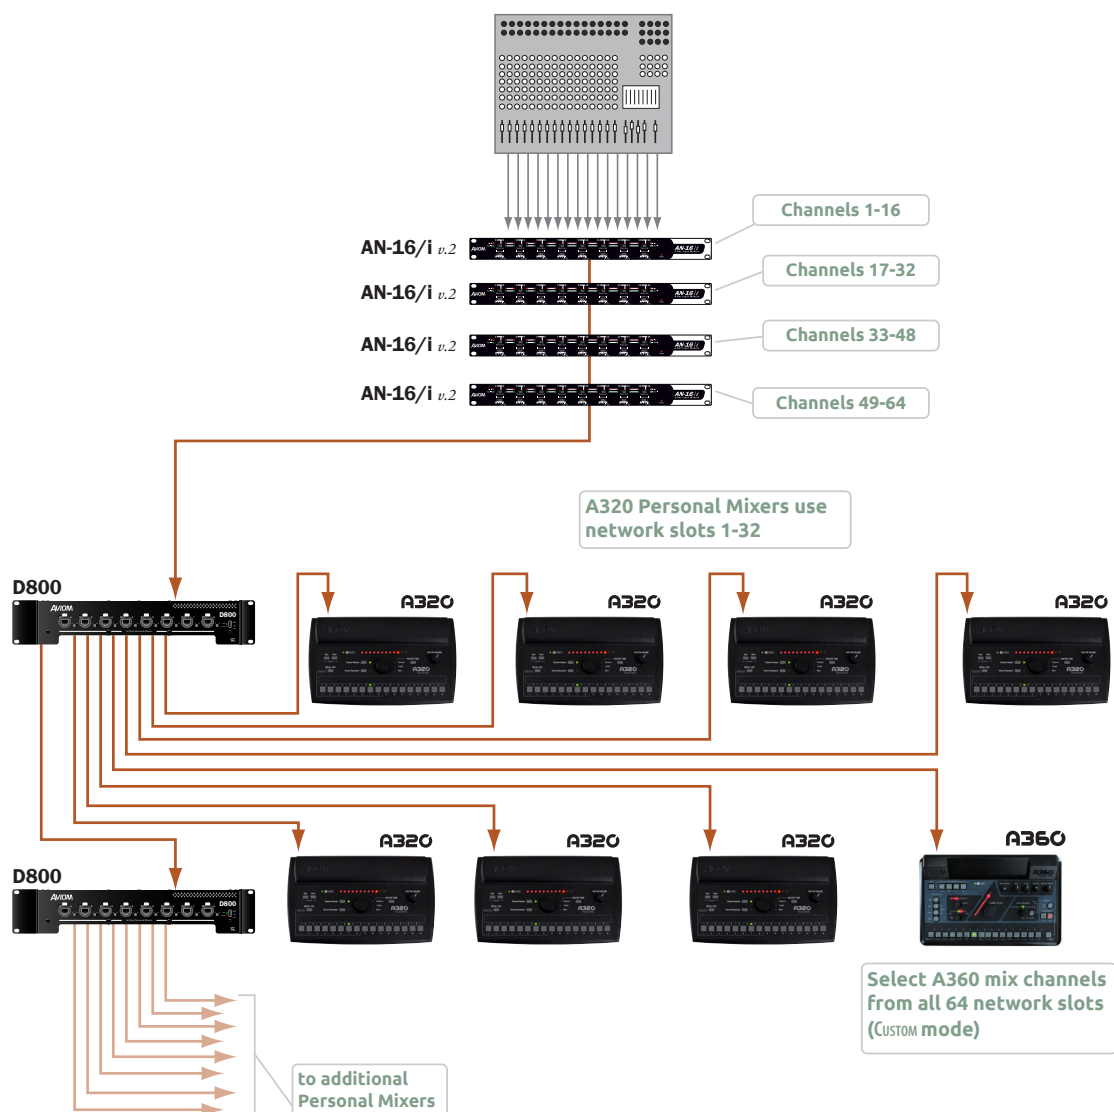


A 64-input system using two A-Net Distributors is shown.

Legacy Products

A-16II or A-16R Personal Mixers may be used in a Pro16e-based system, but note that they can only access the first 16 network slots.

Using Legacy Input Devices

One legacy input device or Pro16 console card may be used in a multiple input device configuration—it will default to supplying the first 16 slots to the network and must be connected to the **A-Net In** of the first Pro16e device in the system. The Pro16e input devices (such as the AN-16/i v.2) should be set to Slot Range 17 and above for this application.

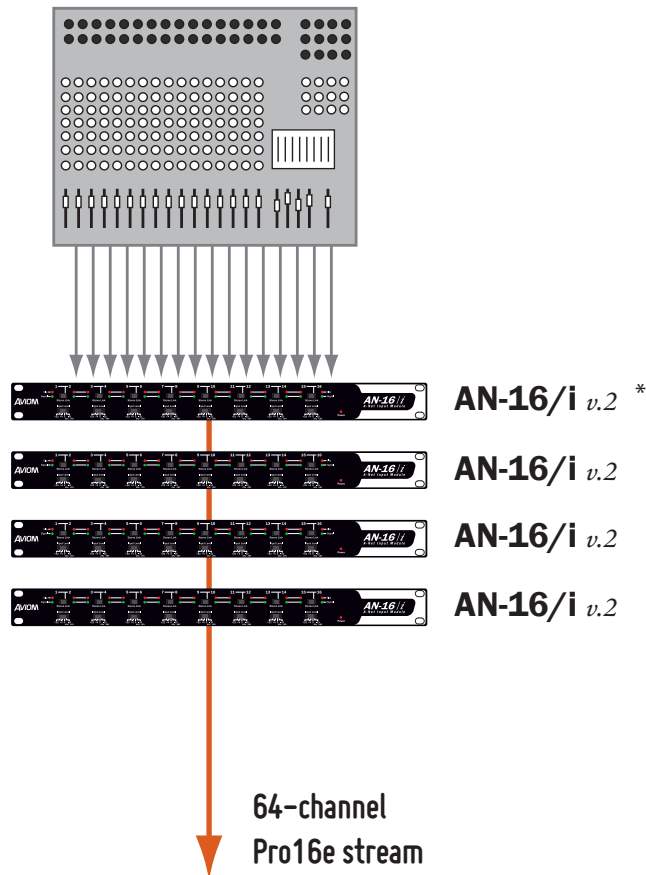


A legacy Pro16 input module or digital console card can be combined with up to three AN-16/i v.2 Input Modules.

** A Pro16 device—original AN-16/i, AN-16/i-M, Y1 A-Net card, ASI, or a third-party console card—may be substituted for the first AN-16/i v.2 in a daisy chain of input devices; a legacy device automatically defaults to Slot Range 1-16.*

Connecting Monitoring Devices

Headphones, wired in-ear monitors, wireless in-ear transmitter systems, and powered speakers can be connected to the A320 Personal Mixer separately or in combination. This section details the connection of these devices to the A320's stereo mix output.

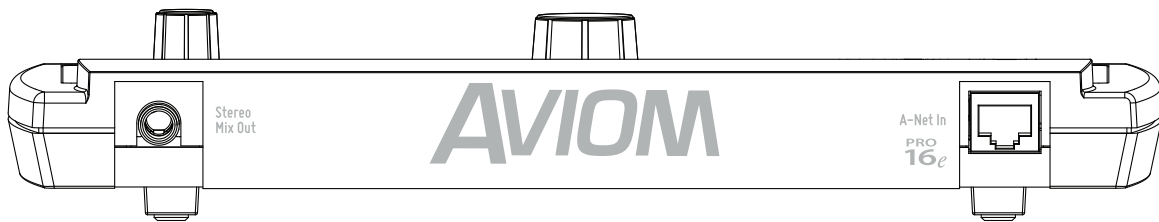


The A320 has a 1/4-inch stereo mix out that can be used as a headphone or line-level output.

Connecting to the Stereo Mix Output

The A320 has a 1/4-inch TRS output dedicated to the stereo mix coming from the Personal Mixer. The output can be connected to headphones, earbuds, or the line-level input of a wireless transmitter system.

Headphones and Earbuds


Connect headphones or wired earbuds to the A320. For best performance, choose low impedance headphones or earbuds whenever possible. High impedance devices will not harm the A320, but note that the mix output level may be lower with these devices. For devices with an 1/8-inch TRS jack an optional 1/4-to-1/8-inch adapter is required.

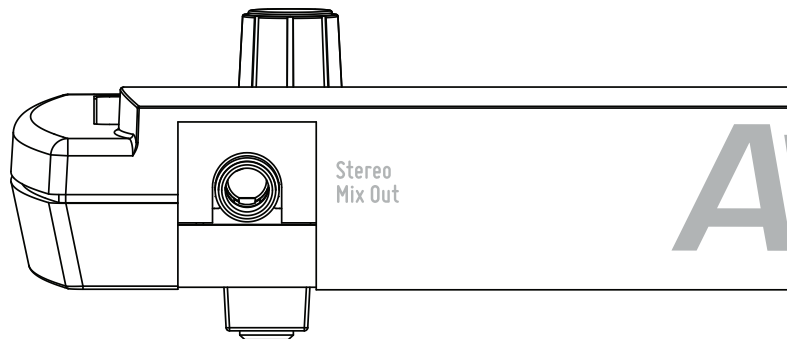

Connect headphones or earbuds to the Stereo Mix Out jack.

Stereo Wireless In-Ear Systems

The A320's Stereo Mix Out may be connected to the left/right inputs of a wireless transmitter used for in-ear monitoring. A Y-cable that splits the TRS (tip-ring-sleeve) stereo output of the A320 to a pair of TS (tip-sleeve) mono left and right outputs is required. Note that the connection from the left and right TS cables is unbalanced. If the inputs to the wireless transmitter are XLR only, a special cable may need to be made. Consult the transmitter's documentation for information about properly connecting unbalanced signals to its balanced XLR inputs.

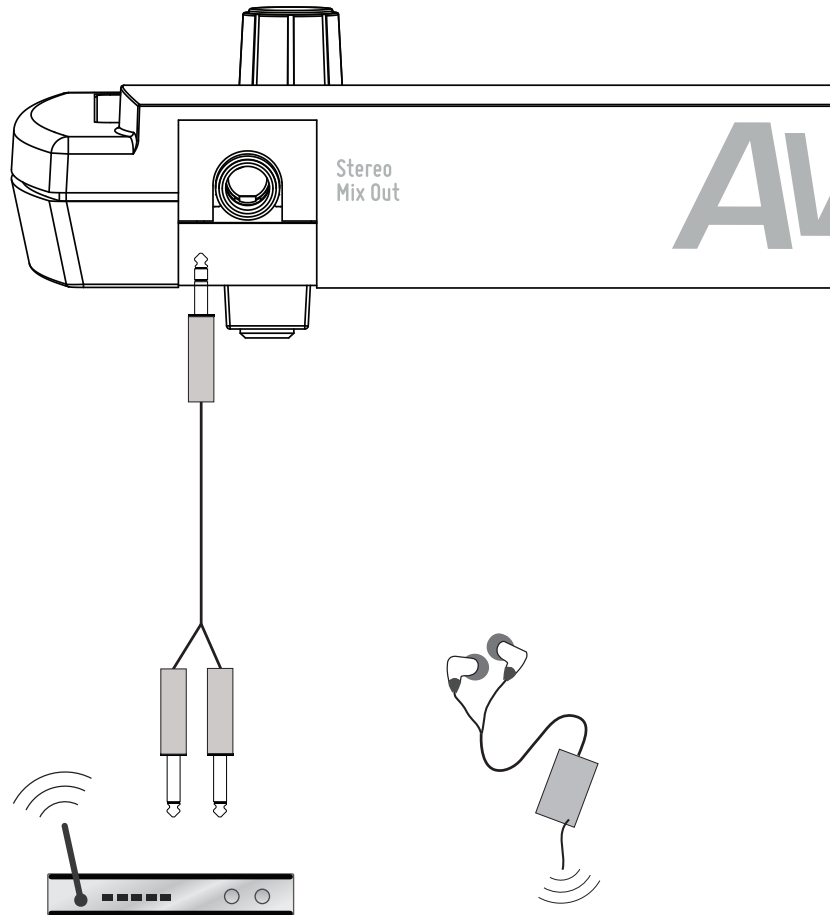


The Stereo Mix Out can be connected to a wireless in-ear transmitter with a Y-cable.

If you need to create a custom adapter cable, note that the TRS tip connector carries the left audio signal, the ring carries the right signal, and the sleeve provides ground for both. The left and right signals are unbalanced in this case.

Stereo Speakers

The Stereo Mix Out may be connected to a set of powered stereo monitor speakers using a Y-cable that splits the TRS stereo output to a pair of TS mono left and right outputs.

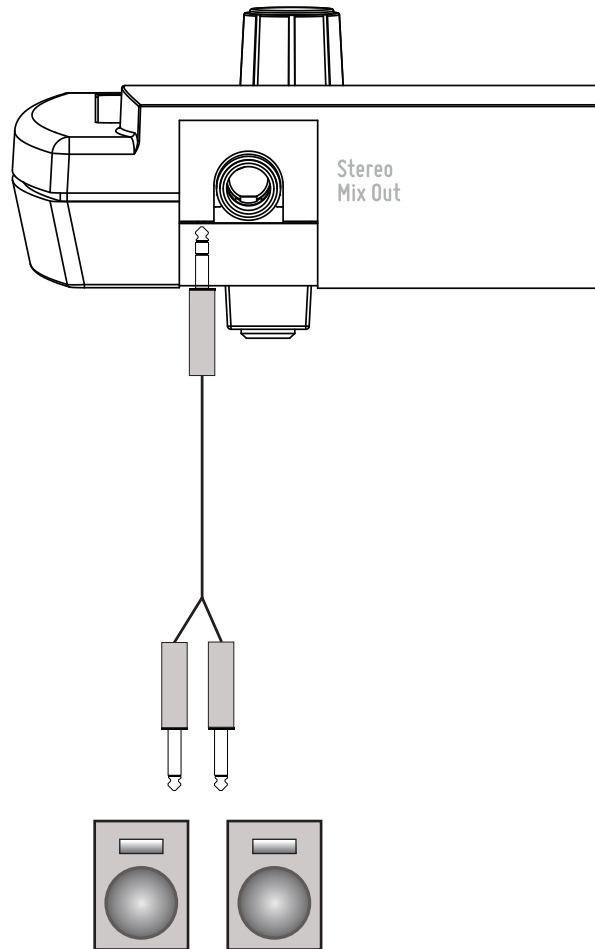



A Y-cable is required to connect the A320 to stereo powered speakers.

If the powered speakers have XLR inputs, a custom cable may be required. Check the powered speaker's documentation for information about properly connecting the unbalanced left and right signals from the A320 Stereo Mix Out to the balanced inputs of the powered speakers.

Specifications


Audio Output	1/4" TRS stereo, headphone or line level;
Stereo Mix Output, Headphone/Line	Tip: Audio Left; Ring: Audio Right; Sleeve: Ground
A-Net I/O	1 A-Net In, RJ45 connector; Supports Pro16 and Pro16e
D/A Conversion	44.1/48kHz, 24-bit
Stereo Operation	Stereo Link, per channel pair; Set at the input module; Variable pan per mono channel or pan/spread per stereo channel pair
Headphone Output	275 mW per side into 50 Ohms (both sides driven)
Headphone Output Impedance	5 Ohms
Freq. Response	3Hz-22kHz +0.2dB/-3dB at 50 Ohms
THD +N	< 0.003%
Signal to Noise (unweighted)	-106dB (measured with zero data into all channels)
Latency	0.880 msec (measured from analog input to analog output)
A-Net Cables	Use shielded Cat-5e (or better) to stay below the CISPR 22 Class B, ICES-003, and FCC 47 CFR Part 15 Class B emissions limits.
A-Net Cable Length	400 feet (122 m)
A-Net Pro16e Protocol	Supports original Pro16 16-channel data; Supports Power Over A-Net
Power	24 VDC, 0.5 amp; Power is supplied over the Cat-5 cable when connected to an Aviom A-Net Distributor
Dimensions	10.26" (260.6 mm) wide x 6.14" (155.95 mm) deep; 1.91" (48.51 mm) high
Weight	1.3 lb. (0.59 kg)
Options	MT-1a Mic Stand Mount (uses 6-32 1/4-inch screws); EB-1 Extension Bracket;

Dimensions

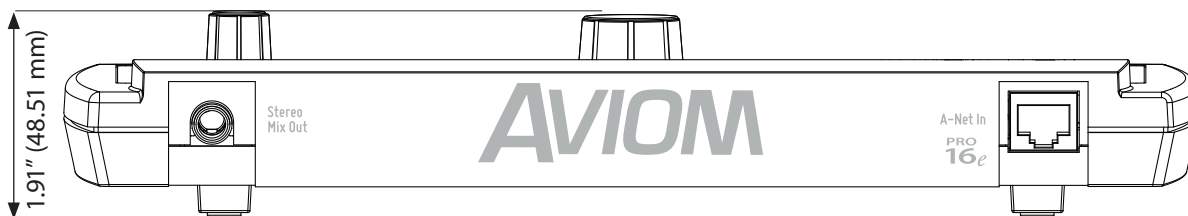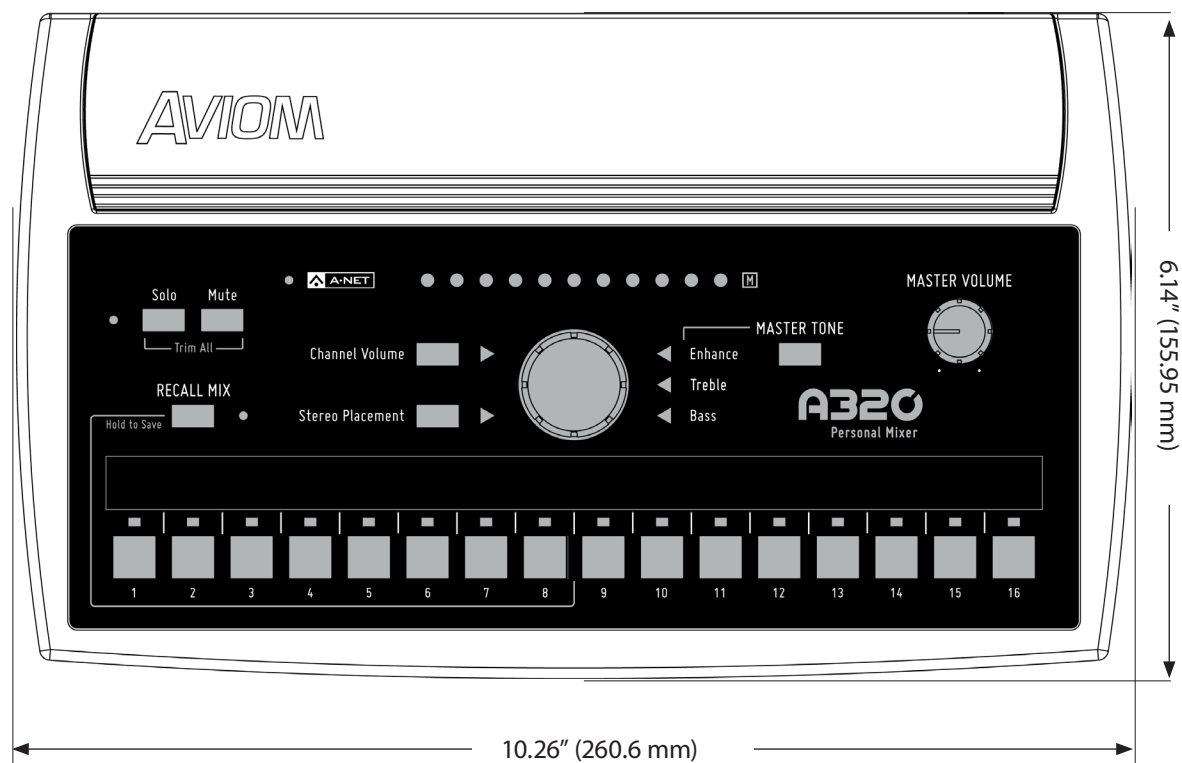

Mixer Label

Use this template as a starting point for creating custom Personal Mixer labels for the A320. It is shown actual size.

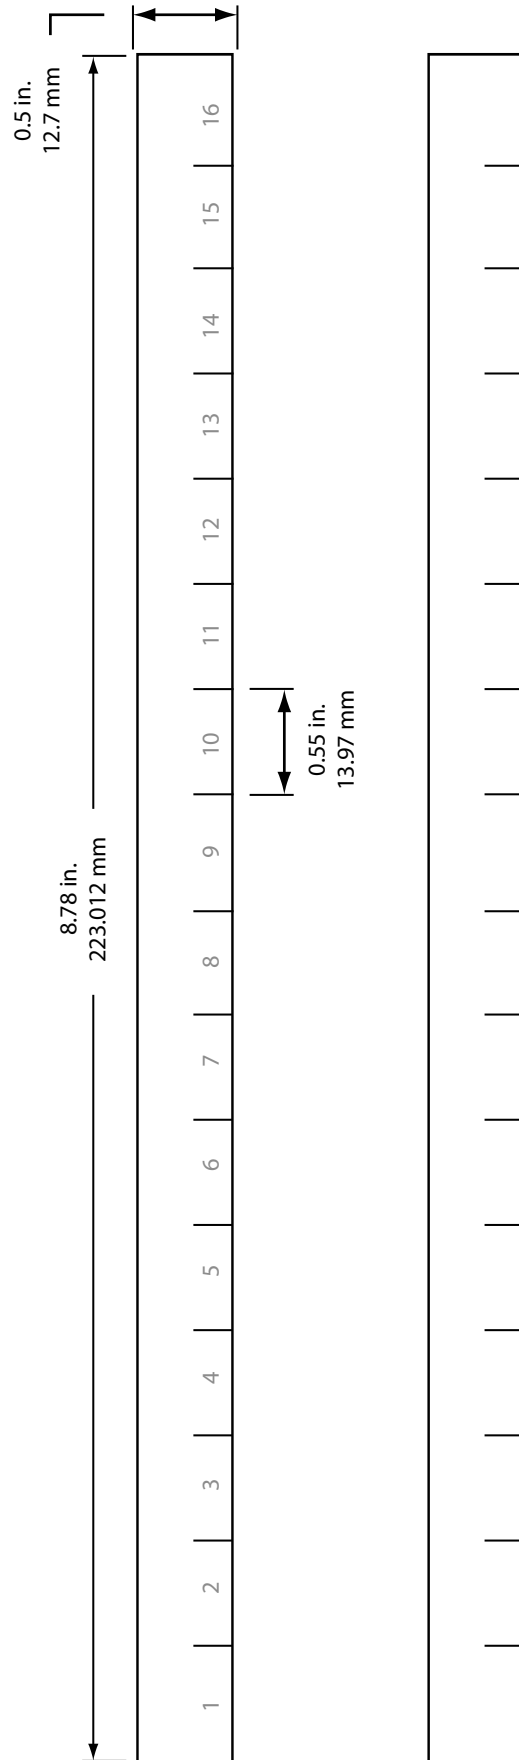

Cat-5 Cable Pinout

The tables below detail the two wiring pinout variations for Cat-5 cables. When making custom cables, either pinout can be used, but both ends of a cable must use the same wiring pattern.

T568A

RJ45 Pin	Wire Color	
1	White/Green	
2	Green	
3	White/Orange	
4	Blue	
5	White/Blue	
6	Orange	
7	White/Brown	
8	Brown	

T568B

RJ45 Pin	Wire Color	
1	White/Orange	
2	Orange	
3	White/Green	
4	Blue	
5	White/Blue	
6	Green	
7	White/Brown	
8	Brown	

Index

Symbols

1/4" TRS stereo 48
1-16 Slot Range 44
3dB
 Trim All 24
16-channel bank 41
16-channel Mode 37
16-Channel Mode 8, 16, 20, 27
16-Channel System 37
17-32 Slot Range 40
32-channel mode 39
32-channel Mode 19
32-Channel Mode 8, 16, 20, 27
32-Channel System 39, 40
64-Channel System 43

A

A-16D A-Net Distributor 2, 3
A-16D Pro A-Net Distributor 2, 3
A-16II Personal Mixer 38, 43
A-16R Personal Mixer 43
A360 Personal Mixer 2, 3, 10, 20, 26, 27, 36, 38, 41, 43
AC Line Conditioning 7
AN-16/i Input Module 4, 20
AN-16/i-M Mic Input Module 4, 20, 44
AN-16/i v.2 Input Module 4, 6, 20, 26, 42, 44
AN-16/o Output Module 4
A-Net 3, 26, 48
 Pro16, Pro16e 20
A-Net Cable 48
A-Net Distributor 2, 4, 7, 8, 10, 20, 37, 42
 D800-Dante, D800 20
A-Net In 6, 34, 35, 42
A-Net I/O 48
A-Net LED 9, 25, 27
 green, red 26
A-Net Out 4, 6, 42
ASI A-Net Systems Interface 1, 4, 20, 38, 44
Aviom16/o-Y1 A-Net Card 4
AV-M8 Mic Input Module 4, 20

B

balanced 46
balanced mono input 35

Bank
 channel 40, 41, 42
Bass 12
Bass Tone Control 25, 29
Big Knob 18

C

Cable Length 6, 48
 Pro16e 6
Cables 5
Cat-5 2, 5
Cat-5 A-Net In 35
Cat-5 cable length 10
Cat-5 Cable Pinout 51
Cat-5e
 5
 shielded 5
 UTP 5
Cat-5e cable
 solid v. stranded 6
Cat-5 Pinout 5
Cat-6, Cat-6e 2, 5
Central Control Knob 9, 11, 17, 18
Certifications iv
Channel Button 9, 14, 15
Channel Controls 17, 18
channel count 20
Channel Label Strip 9, 14, 15
Channel Map 40
Channel Mapping 27, 32, 40
Channel Mute LED 14
channel pairs 16, 20
Channels 15
channels 1-32 20
channels 33-64 20
Channel Volume 11, 15, 18, 32
Channel Volume button 11
Channel Volume Button 9, 11, 17
Channel Volume Control 18
Channel Volume LED 15, 17
Cleaning and Maintenance 7
Clear a Mix 22, 27, 33
clock source 20
Compatibility 4, 6, 20, 35, 42, 43, 44
 with Pro64 5

- computer network 5
- Connecting Listening Devices 45
- console card 4, 8, 20, 26, 37, 44
- Control Knob 17, 18
- crossover cables 5
- Custom Mode 35
 - A360 43

D

- D400 A-Net Distributor 2, 4, 10
- D400-Dante A-Net Distributor 2, 3, 4, 7, 10
- D800 A-Net Distributor 2, 3, 4, 7, 10, 37, 38
- D800-Dante A-Net Distributor 3, 4, 7, 10, 20, 37, 38
- D/A Conversion 48
- Dante 2, 4, 8, 10
 - A-Net Distributor 20
- DC power 10, 35
- default 8
- Default A320 Channel 40
- default settings
 - Enhance control 28
 - Mix 33
 - tone control 29
- default Slot Range
 - Pro16 44
- default value 27
- digital console card 37, 38, 39
- Dimensions 49
 - mixer label 50

E

- earbuds 45
- EB-1 Extension Bracket 48
- Enhance 12, 18
- Enhance Tone Control 25, 28, 32
 - default setting 28
- EQ 12, 28
- Ethernet 3
- expanding a system 38

F

- flat
 - tone control 29
- Frequency Response 48
- Front Panel 14

G

- green triangle LED 28

H

- Headphone/Line 48
- Headphone Output 48
- headphones 45
- Hold to Save 30

I

- I, II switches 38
 - D800 10, 37
- Impedance 45
 - headphone 48
- in-ear monitors 2, 46
 - wired 45
- In-Ear System 46
- in-ear transmitter 35
- inline coupler 6
 - certified 6
- input device 20
- Input Module 4
- inputs 20
- insert cable 35

L

- Label Strip 14, 15
- LAN
 - Local Area Network 3
- Last selected mix channel 32
- Latency 48
- LED 17
 - Channel Mute 14
- LEDs 9
- legacy device 42, 44
- Legacy Input Hardware 44
- Level Trim 24
- line-level output 35
- Line Out 48
- Link
 - Stereo 37, 40
- linked channel 16
- link switch 20
- low impedance 45

M

- mapped
 - stereo channels 16
- Mapping
 - channel 40
- Master Bass tone control 32
- Master Section 25
 - Tone Control 32

- Master Tone 18
- Master Tone Button 9, 25, 28
- Master Tone Settings 12
- Master Treble tone control 32
- Master Volume 24, 28, 32
- Master Volume Control 25
- Master Volume Knob 9
- maximum cable length 6
- M icon 22
- Mic Stand Mount 3
- Mix
 - default settings 33
- Mix Channel 14, 15, 40
- Mixer Label 50
 - template 50
- Mixer Mode 8, 26, 27
- Mix Output 28, 35, 48
- Mix Preset 2, 13, 15, 18, 29, 30, 31, 32
 - not saved in a mix 32
 - reset 27
 - What Gets Saved 32
- Monitoring Device 45
- Mono Channel 19
- mono input 35
- MT-1a Mic Stand Mount 3, 48
- Multiple Input Devices 41
- Mute 15, 16, 32
- Mute a channel 18
- Mute All 22
- Mute Button 9, 17, 22
- Muted channel
 - Solo 23
- Mute LED 9, 22
- Mute + Solo
 - Trim All 24

N

- network 5
- network slots 41

O

- odd-even channel pairs 20
- Operating Temperature iii
- Options 48
- original AN-16/i 44
- Output Impedance 48

P

- Package Contents 3
- packet 27
- Pan 19, 21

- Parallel Connections 38
- permanent installation 5
- Pinout 5, 51
- pool 41
- powered speaker 35, 45
- Power Over A-Net 48
- power over Cat-5 35
- Preset 18, 30
 - storage locations 15
 - What Gets Saved 19, 32
- Preset Locations 14
- Pro16 1
 - default Slot Range 44
- Pro16 A-Net 3, 4, 8, 20, 26, 27, 37
- Pro16e 1, 36
- Pro16e A-Net 3, 8, 15, 20, 26, 27, 37
 - cable length 6
- Pro16 vs. Pro16e 35
- Pro64 1, 38
- Pro64 A-Net 4

R

- Range switch 41, 42
- Rear Panel 34
- Recall a Mix Preset 33
- Recall Mix Button 9, 13, 22, 30, 31, 33
- Recall Mix LED 33
- Reset a Mix 27, 33
- RJ45 5, 34, 35
- router 5

S

- Sample Rate 48
- Save a Mix Preset 13, 31, 33
- SB4 System Bridge 20
- Setting the A-Net Mode 26
- Setup 36
- Shielded Cat-5 5
- Signal to Noise 48
- slot 26
- Slot Range 41, 44
- Slot Range Setup 42
- Slot Range switch 41, 42
- solid v. stranded Cat-5e 6
- Solo 15, 23, 31
 - Muted channel 23
- Solo Button 9, 16, 17, 24
- Solo LED 17, 23
- splitter cable 35
- Stereo Channels 16, 20
 - in Pro16 mode 16
 - Panning 22, 23
- Stereo Link 15, 20, 37, 39, 40

- Stereo Mix Out 28, 34, 35, 45, 47
- stereo/mono Link switch 20
- Stereo Placement 2, 12, 15, 16, 18, 19, 32
- Stereo Placement Button 9, 12, 17
- Stereo Placement LED 17
- Stereo Speakers 47
- storage locations
 - Preset 15
- submix 19
- surge protection 7
- System Bridge 6

T

- T568A 51
- T568B 51
- template
 - Mixer Label 50
- Tone 25, 28
- Tone Button 25
- Tone Control 29
 - default setting 29
 - flat 29
 - master section 32
- To Recall a Mix 33
- transmitter 46
- Treble 12
- Treble Tone Control 25, 29
- Trim All 17, 24
- Troubleshooting Mixer Modes 27
- TRS 35, 45, 48
- TRS Stereo 35
- TRS to TS 35
 - Y-cable 46, 47
- TRS wiring 46
- TS mono 47

U

- unbalanced 35, 46, 47
- unmute 22, 33
- Unshielded Cat-5 5
- UPS 7

V

- Volume 18, 28

W

- Warranty Registration 3
- What Gets Saved
 - mix preset 32

- wired in-ear monitors 45
- Wireless In-Ear System 35, 45, 46
- wiring pinout 5, 51

X

- XLR input 46

Y

- Y1 A-Net Card 4, 20, 44
- Yamaha 4, 20
- Y-cable 35, 46, 47

Warranty Registration

Please take a moment to fill in this warranty registration form.

Return it to Aviom via mail or fax. All information will be kept confidential.

Model _____	Product Serial Number _____
Model _____	Product Serial Number _____
Model _____	Product Serial Number _____
Model _____	Product Serial Number _____

Date Purchased _____

Dealer Name _____

Dealer Location _____

Your Name _____

Address _____

Address _____

City _____

State/Province _____

Zip/Postal Code _____

Country _____



Email Address _____

Fax this form to Aviom at +1 610-738-9950



1157 Phoenixville Pike, Suite 201 • West Chester, PA 19380 USA
Voice: +1 610.738.9005 • Fax: +1 610.738.9950 • www.Aviom.com

AVIOM[®]

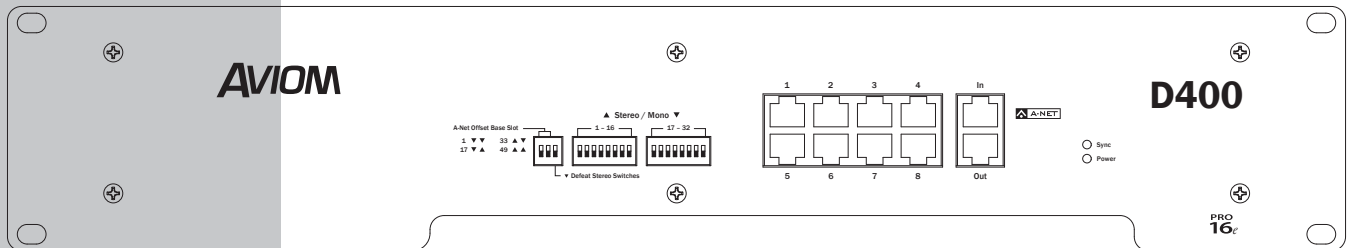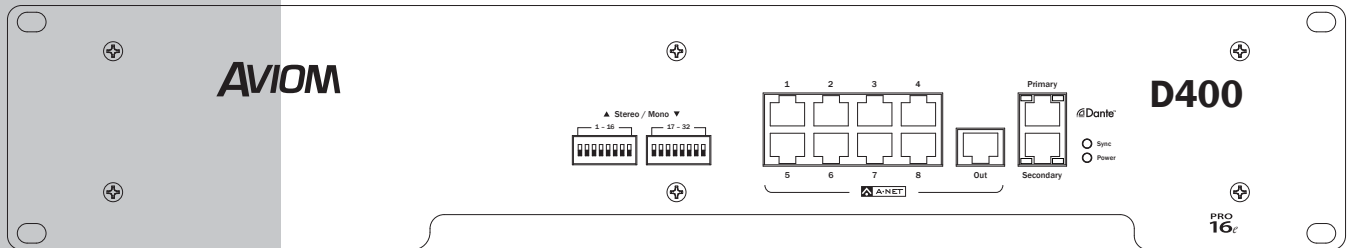

D400-Dante

D400

A-Net Distributor

User Guide

READ THIS FIRST

Important Safety Instructions

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with a dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or third prong are provided for your safety. If the provided plug does not fit your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles, and the point where they exit the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
-  12. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
13. Unplug this apparatus during lightning storms or when unused for long periods of time.
14. Refer all servicing to qualified personnel. Servicing is required when the apparatus has been damaged in any way, such as when the power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
15. The apparatus shall be connected to a Mains power outlet with a protective grounding/earthing connection.
16. Where the Mains plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in this manual.



The lightning flash with arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of uninsulated "dangerous" voltage within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to humans.



WARNING!



TO REDUCE THE DANGER OF ELECTRICAL SHOCK DO NOT REMOVE COVERS.

NO USER SERVICEABLE PARTS INSIDE.

REFER SERVICING TO QUALIFIED SERVICE PERSONNEL ONLY.

To reduce the risk of fire or electrical shock, do not expose this product to rain or other types of moisture.

To avoid the hazard of electrical shock, do not handle the power cord with wet hands.

Replace fuse with same type and rating.

Operating Temperature: 0°C to 40°C (32°F to 104°F)

Risque de choc électrique – ne pas ouvrir. Pour réduire le risque de feu ou de choc électrique, ne pas exposer cet équipement à la pluie ou la moisissure. Pour réduire le risque de choc électrique, ne pas retirer le couvercle. Pièces non remplaçables par l'utilisateur. Confier la réparation à une personne qualifiée. Attention – utiliser seulement un fusible de rechange de même type.

Cet appareil est conforme à la section 15 de la norme FCC. Son fonctionnement est soumis aux conditions suivantes : (1) cet équipement ne doit pas causer des interférences nocives, et (2) cet équipement doit accepter toute interférence captée incluant les interférences pouvant causer des opérations indésirables.

Cet appareil numérique de Classe B est conforme à la norme NMB-003 du Canada.

IMPORTANT:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to the product not expressly approved by Aviom, Inc. could void the user's FCC authority to operate the equipment.

CAUTION:

- Using any audio system at high volume levels can cause permanent damage to your hearing.
- Set your system volume as low as possible.
- Avoid prolonged exposure to excessive sound pressure levels.

Certifications

EMC: EN55103-1:2009
EN 55103-2: 2009
EN 55022:2006 / CISPR 22:1997
CAN/CSA-CEI/IEC CISPR 22:02
FCC 47 CFR, Part 15

Safety: UL 62368-1 Ed 2.0
Testing done to UL 62368-1 first edition
Can/CSA C22.2 62368-1

ETL/cETL Listed and RoHS Compliant



✓ **NOTE:** For connections to Personal Mixers shielded Cat-5e (or better) cable must be used to stay below the CISPR 22 Class B, ICES-003, and FCC 47 CFR Part 15 Class B emissions limits. Unshielded Cat-5e cable may be used on all other connections.

Notice of Rights

All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means—electronic, mechanical, photocopy, recording, or otherwise—without written permission of Aviom, Inc.

Trademarks

Aviom, A-Net, the A-Net icon, Pro16, Pro16e, Pro64, Virtual Data Cables, m-control, One-Touch Ambience, Dual Profile Channel, Network Mix Back, and AllFrame are trademarks of Aviom, Inc.

Audinate®, the Audinate logo and Dante are trademarks of Audinate Pty Ltd.
Audinate products are protected by one or more of US Patents 7747725, 8005939, 7978696, 8171152, and other patents pending or issued. See www.audinate.com/patents.

Apple, the Apple logo, and iPhone are registered trademarks of Apple Inc.

All other trademarks are the property of their respective owners.

©2015 Aviom, Inc. All rights reserved. Information is subject to change without notice.

Aviom, Inc. Limited Warranty

Aviom, Inc. warrants this product against defects in materials and workmanship for a period of **one year** from the date of the original retail purchase.

This warranty does not apply if the equipment has been damaged due to misuse, abuse, accident, or problems with electrical power. The warranty also does not apply if the product has been opened or modified in any way; if the product serial number has been damaged, modified, or removed; or if the original Quality Assurance label has been damaged, modified, or removed.

If a defect is discovered, first write or call Aviom, Inc. to obtain a Return Authorization number. No service will be performed on any product returned without prior authorization. Aviom, Inc. will, at its option, repair or replace the product at no charge to you. The product must be returned during the warranty period, with transportation charges prepaid to Aviom, Inc., 1157 Phoenixville Pike, Suite 201, West Chester, PA 19380. You must use the product's original packing materials for shipment. Shipments should be insured for the value of the product. Include your name, address, phone number, description of the problem, and copy of the original bill of sale with the shipment. The Return Authorization number should be written on the outside of the box.

THIS LIMITED WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS. YOU MAY HAVE OTHER RIGHTS, WHICH VARY FROM STATE TO STATE (OR JURISDICTION TO JURISDICTION). AVIOM'S RESPONSIBILITY FOR MALFUNCTIONS AND DEFECTS IN HARDWARE IS LIMITED TO REPAIR AND REPLACEMENT AS SET FORTH IN THIS LIMITED WARRANTY STATEMENT. ALL EXPRESS AND IMPLIED WARRANTIES FOR THE PRODUCT, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED IN DURATION TO THE WARRANTY PERIOD SET FORTH ABOVE. NO WARRANTIES, WHETHER EXPRESS OR IMPLIED, WILL APPLY AFTER SUCH PERIOD.

AVIOM, INC. DOES NOT ACCEPT LIABILITY BEYOND THE REMEDIES SET FORTH IN THIS LIMITED WARRANTY DOCUMENT. AVIOM, INC.'S LIABILITY IS LIMITED TO THE REPAIR OR REPLACEMENT, AT OUR OPTION, OF ANY DEFECTIVE PRODUCT, AND SHALL IN NO EVENT INCLUDE INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY KIND.

SOME STATES DO NOT ALLOW EXCLUSIONS OR LIMITATION OF IMPLIED WARRANTIES OR LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU.

Warranty Information

Please record the following information for future reference:

Your Authorized Aviom Dealer:

Name: _____

Address: _____

Phone: _____

Serial Numbers of Your Aviom Products: _____

Date of Purchase: _____

Your Authorized Aviom Dealer is your primary source for service and support. The information recorded above will be helpful in communicating with your Authorized Aviom Dealer should you need to contact Aviom Customer Service. If you have any questions concerning the use of this unit, please contact your Authorized Aviom Dealer first. For additional technical support, or to find the name of the nearest Authorized Aviom Repair Station, check the Aviom web site at www.aviom.com.

To fulfill warranty requirements, your Aviom product should be serviced only at an authorized Aviom service center. The Aviom serial number label must appear on the outside of the unit, or the Aviom warranty is void.

This manual and its contents are copyrighted by Aviom, Inc. All rights are reserved by Aviom, Inc. This document may not, in whole or in part, be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form without prior written consent from Aviom, Inc.

The software and/or firmware contained within Aviom products is copyrighted and all rights are reserved by Aviom, Inc.

Although every effort has been made to ensure the accuracy of the text and illustrations in this manual, no guarantee is made or implied as to the accuracy of the information contained within.

Table of Contents


Important Safety Instructions	ii
Certifications.	iv
Aviom, Inc. Limited Warranty.	v
Warranty Information	vi
D400 and D400-Dante	1
Conventions Used in this Document	2
Using Personal Mixers	2
Cat-5 Cables	2
A-Net Distributors	2
Button Presses	2
Slots	2
Package Contents	3
About A-Net	3
Compatibility	4
Pro16 Products	4
About Category 5	5
Cat-5 Cables	5
Cable Lengths	6
AC Line Conditioning	7
Cleaning and Maintenance Information	7
D400 A-Net Distributor	8
Overview.	8
A-Net In, D400	11
Dante Connections, D400-Dante	11
Dante Primary Port	11
Dante Secondary Port	12
A-Net Ports 1 to 8	12

A-Net Out	13
Stereo Link DIP Switches	14
DIP Switch Block 1	15
DIP Switch Block 2	15
A-Net Offset Base Slot	16
Channel Mapping	17
Stereo Channels	19
Sync LED	20
Power LED	20
Power Supply	21
Fuse	22
 Dante Setup	 23
Routing Channels	23
Clock Status	24
Device View	25
Status Tab	26
Device Config Tab	27
Network Config Tab	28
 Personal Mixing Systems	 29
Connecting Personal Mixers	29
 16-Channel Personal Mixing Systems	 30
About A-Net Offset Base Slot	31
Stereo Links	31
Using Multiple A-Net Distributors	35
Using the D400 With the D800 and A-16D Pro	36
 D400 and D400-Dante A-Net Distributor Specifications	 37
Common Specifications	37
D400 A-Net Distributor Specifications	38
D400-Dante A-Net Distributor Specifications	38
 Dimensions	 39
 Cat-5 Cable Pinout	 40
T568A	40
T568B	40
 Index	 41
Warranty Registration	44


D400 and D400-Dante

Thank you for purchasing the Aviom **D400** and/or **D400-Dante A-Net Distributor**. This User Guide is designed to familiarize you with your new product's features and to have your personal mixing system up and running as quickly as possible.


Two versions of the D400 are available: the standard D400 includes a Pro16e® A-Net® input, compatible with all Pro16® Series and Pro16e-capable devices; the D400-Dante offers Dante Primary and Secondary inputs for connectivity to a Dante™ digital audio network.

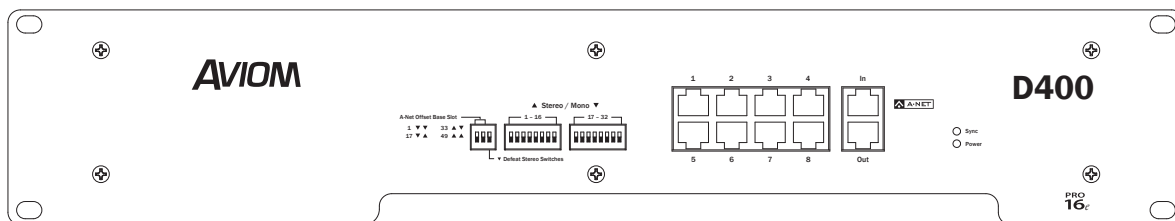

The front panel of the D400

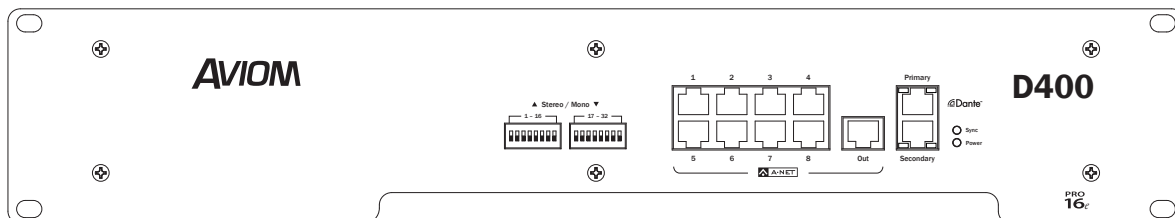

The front panel of the D400-Dante

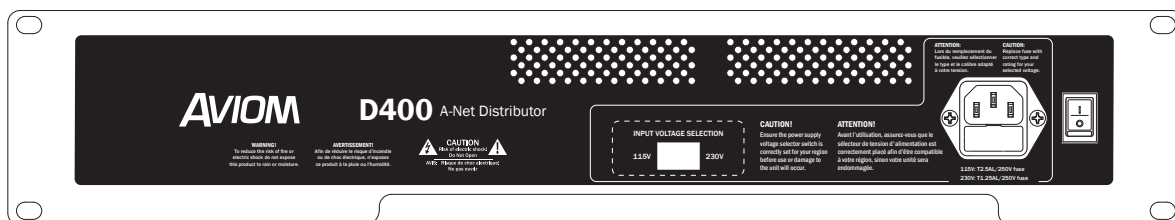

The rear panel of the D400 and D400-Dante are identical.

Conventions Used in this Document

Using Personal Mixers

When referring to the use of the Personal Mixers in a personal mixing system in general, the term ***Personal Mixer*** is used to describe a case where an A640, A360, A320, or A-16II Personal Mixer can be used.

Cat-5 Cables

In most cases Cat-5e, Cat-6, and Cat-6e cables can be interchanged. When speaking about interconnections between components in a system, the term ***Cat-5*** is used generically to indicate the use of any of the applicable cable types.

A-Net Distributors

The D800, D800-Dante, D400, D400-Dante, as well as the legacy A-16D, and A-16D Pro A-Net Distributors are referred to generically as ***A-Net Distributors***. All are used to copy an A-Net digital signal and split it into multiple copies so that devices may be connected in parallel. In a case where either the D400 or D400-Dante version of the product may be used, the text will reference the ***D400***. In a case where either the D800 or D800-Dante version of the product may be used, the text will reference the ***D800***.

Button Presses

When instructed to press a specific button, move a switch, or when referring to a specific port, jack, etc., on a product, a special font style is used. For example, "Connect a Cat-5 cable to the ***A-Net In*** port."

Slots

Audio channels from analog input devices or digital console cards connected to the network are referred to as ***slots***. There are a total of 64 slots in an A-Net network.

Package Contents

The D400 (or D400-Dante) A-Net Distributor box includes:

- One A-Net Distributor
- IEC power cable

Documentation for the D400 is on the Aviom website, www.Aviom.com.

Options for your personal mixing system include:

- Cat-5e/Cat-6 interconnect cables
- D800, D800-Dante, D400, or D400-Dante A-Net Distributors
- A640, A360, A320, or A-16II Personal Mixers
- Dante Controller software, available free from the Audinate website

A Warranty Registration can be found within this User Guide. Be sure to fill out the form and return it to Aviom, Inc. via mail or fax as soon as possible.

About A-Net

A-Net® is a proprietary high-speed data transmission protocol developed by Aviom, capable of sending and receiving high-quality digital audio using readily available Cat-5 cables.



A-Net is based on the physical layer of Ethernet, a Local Area Network (or LAN) technology. This provides A-Net with a mature and robust base on which to build. However, it is important to note that A-Net devices are not compatible with Ethernet devices.

Some of the benefits of using A-Net to transmit digital audio are:

- Virtually no latency; analog in to analog out is always less than one millisecond
- No ground loops
- Easy cabling using readily available components
- An unlimited number of A-Net devices can be used in a system
- Ease in spanning long distances between system components

There are two versions of Pro16 A-Net: the original Pro16 A-Net signal carries sixteen channels of digital data while the enhanced Pro16e® version of A-Net is capable of carrying up to 64 channels of digital audio data. Like standard Pro16 A-Net, Pro16e is a point-to-point digital audio protocol.

Pro16e A-Net data is intended for use with the A640, A360 and A320 Personal Mixers which can take advantage of the higher network channel count that Pro16e provides.

Compatibility

The D400 and D400-Dante A-Net Distributors are compatible with Pro16 and Pro16e A-Net devices as detailed below.

Pro16 Products

The **A-Net Out** from the following Pro16 devices may be connected to the D400's **A-Net In** port:

- AN-16/i v.2 Input Module
- D800 or D800-Dante A-Net Distributors
- Third-Party Pro16 A-Net digital console cards
- Aviom16/o-Y1 A-Net Card for Yamaha® devices
- AN-16/o v.4 Output Module
- AN-16/i-M Mic Input Module
- AV-M8 Mic Input Module
- AV-P2 Output Module


Legacy Products:

- AN-16/i Input Module
- A-16II Personal Mixer
- A-16R Rack-mount Personal Mixer
- A-16D and A-16D Pro A-Net Distributors


About Category 5

The term Category 5 (also referred to as Cat-5) is broadly used to describe a type of high performance network cabling used for data transmission purposes to connect computer networks and other devices. A standard patch cable consists of four twisted pairs of copper wire terminated by RJ45 male connectors. The cable assembly is used to provide connectivity between any two Cat-5 female RJ45 jacks.

A variation of the cable, called Category 5e (or Cat-5e), has largely replaced Cat-5 in the field; it uses additional twists in the cable's wire pairs to reduce interference in high-speed network applications. Additional wire pair variations are found in Cat-6 and Cat-6e cables, typically used with gigabit networking devices.



RJ45 Jack



Cat-5e Cable

Cat-5 Cables

Although the D400 (or D400-Dante) A-Net Distributor's eight front panel **A-Net Out** ports will operate properly with unshielded Cat-5e cable, when connecting these outputs to Personal Mixers shielded Cat-5e (or better) cable must be used to stay below the CISPR 22 Class B, ICES-003, and FCC 47 CFR Part 15 Class B emissions limits. Unshielded Cat-5 cable may be used on all other connections.


For fixed or permanent installations, you have the option of running Cat-5 cables inside walls and terminating them with readily available wall panel connectors that include the RJ45 jack. (Solid wire is recommended for permanent installations.) A Cat-5 cable wiring pinout table is included at the end of this document. See page 40.

In addition to standard Category 5e cables, Cat-6 and Cat-6e cables may also be used.


✓ **NOTE:** When purchasing Category 5 cables, be sure to buy only standard Cat-5 cables, not those sold as *crossover* cables. A crossover cable is used for file transfer between two computers and is not compatible with your Aviom equipment.

Cable Lengths

For Pro16 applications—connecting one **Pro16** device to another—the Cat-5 cables used with your Aviom products may be up to 500 feet (approximately 150 meters) in length between devices. For example, connecting an AN-16/i-M Mic Input Module to an AN-16/o V.4 Output Module is a Pro16-to-Pro16 connection.

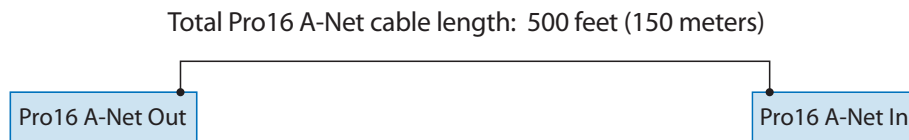

When using **Pro16e**—such as the **A-NET OUT** from an AN-16/i v.2 to *any other* Pro16 or Pro16e device—Cat-5 cables may be up to 400 feet (approximately 122 meters) in length between compatible devices due to the larger amount of data being transmitted to accommodate Pro16e’s higher channel count.

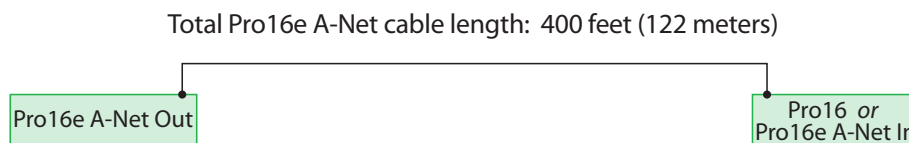


The maximum cable length specification applies to the total cable length between an **A-NET OUT** port on one device and the **A-NET IN** port on the next A-Net capable device in your system.

Your cable length performance will be affected by a number of factors including the quality of the cables used, and the number of passive devices such as cable couplers or passive wall panel interconnections in use.

Stranded or solid Cat-5 cable may be used; stranded cable is easier to deploy on a stage while solid core cable provides slightly better maximum distance performance. Solid core wire is typically used in permanent installations in walls and across ceilings.

When using the optional SB4 System Bridge with Pro16 and Pro16e devices, the cable length specification applies to the *total* cable length between the two active A-Net devices being connected with the passive System Bridge, plus all cables. This is also true when using a passive inline coupler to extend cable lengths.

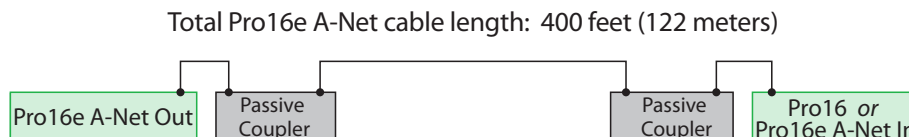

Pre-made cables in a variety of lengths and colors are available at most computer outlets. Cables may be extended by using a simple passive device called an *inline coupler* to add length to existing cables (as long

as you do not exceed the specified maximum cable length). If you need a longer cable on occasion, this is a simple solution. Note that the maximum cable length performance can be compromised by using inline couplers or other passive connection devices.

AC Line Conditioning

Aviom products are digital devices and as such are sensitive to sudden spikes and drops in the AC line voltage. Changes in the line voltage from lightning, power outages, etc., can sometimes damage electronic equipment.

To minimize the chance of damage to your equipment from sudden changes in the AC line voltage, you may want to plug your equipment into a power source that has surge and spike protection. Power outlet strips are available with built-in surge protection circuits that may help protect your equipment.

Other options for protection of your equipment include the use of an AC line conditioner or a battery backup system (sometimes referred to as an *uninterruptible power supply*, or UPS).

Cleaning and Maintenance Information

The exterior of your Aviom products should be cleaned with a dry, soft, lint-free cloth. For tougher dirt, you can use a cloth slightly dampened with water or with a mild detergent.

When cleaning your Aviom products, never spray cleaners directly onto the product surfaces. Instead, spray a small amount of the cleaning solution onto a clean cloth first. Then use the dampened cloth to clean the product.


✓ **NOTE:** Never use solvents or abrasive cleaners on the finished surfaces of your Aviom products.

D400 A-Net Distributor


Aviom's series of D400 A-Net® Distributors provides support for parallel connections of up to eight Pro16® devices, including the A640, A360, A320, and A-16II and Personal Mixers.

Overview

Two versions of the D400 are available. The standard D400 includes a Pro16e® A-Net input, compatible with all Pro16 Series and Pro16e-capable devices. The D400-Dante A-Net Distributor offers connectivity for a Dante™ digital audio network, allowing up to 32 channels to be assigned from a Dante audio network to A640, A360 and A320 Personal Mixers. Each unit has eight A-Net ports that supply both digital audio data and DC power to connected Personal Mixers.

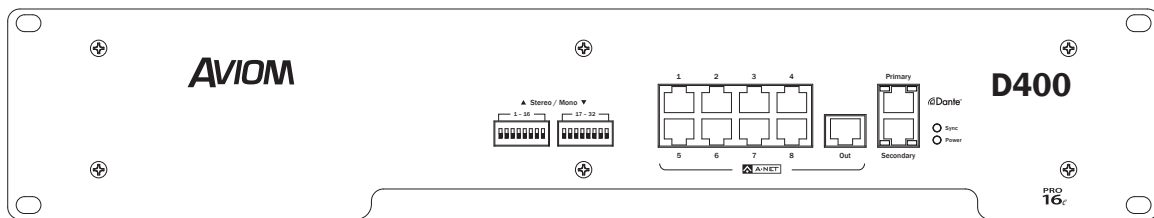

D400-Dante front panel

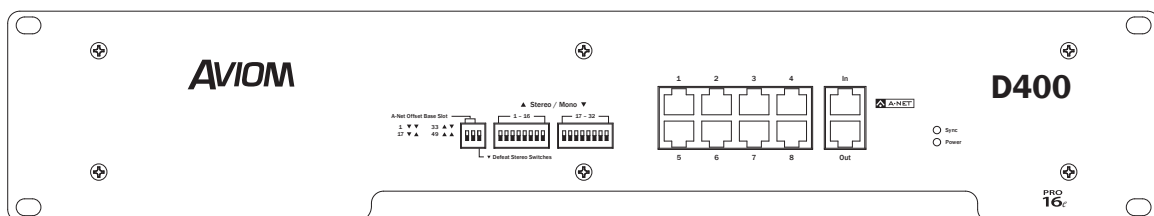


D400 front panel

An unlimited number of D400, D400-Dante, D800, and D800-Dante A-Net Distributors can be used in an A-Net network. For more information on system setup, see page 29.

D400 Front Panel


The A-Net version of the D400 A-Net Distributor has the following features.

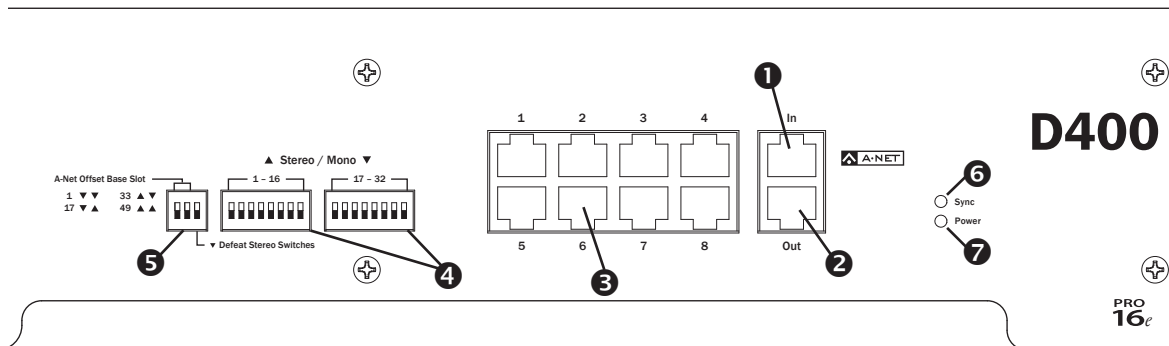

	FUNCTION
1	Pro16e A-Net In
2	A-Net Out, unpowered
3	A-Net outputs 1-8, with DC power for Personal Mixers
4	Stereo link DIP switches, slots 1-16 and 17-32
5	A-Net Offset Base Slot and Defeat Stereo Links DIP switches
6	Sync LED
7	Power LED

D400-Dante Front Panel

The Dante version of the D400 A-Net Distributor has the following features.

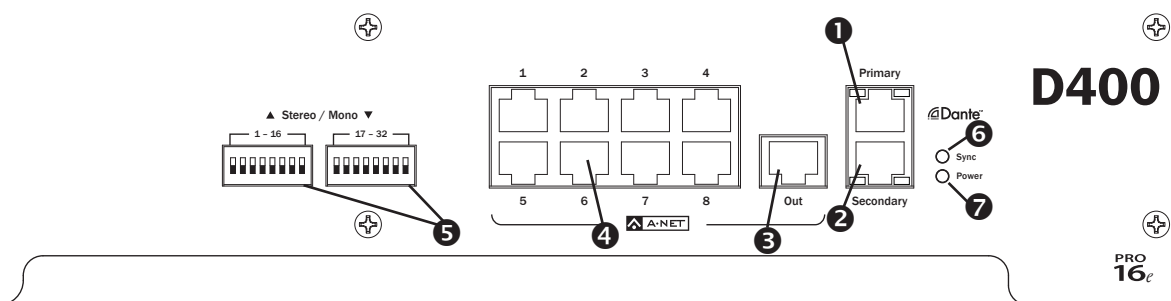

	FUNCTION
1	Dante Primary port, with LEDs
2	Dante Secondary port, with LEDs
3	A-Net Out, unpowered
4	A-Net outputs 1-8, with DC power for Personal Mixers
5	Stereo link DIP switches, 1-16 and 17-32
6	Sync LED
7	Power LED

A-Net In, D400


The **A-NET IN** port is available only on the D400 A-Net Distributor. It can accept the A-Net digital data coming from the **A-NET OUT** port of any Pro16 or Pro16e device. Pro16 data has a maximum of 16 channels; Pro16e data has a maximum of 64 total channels.

The A-Net digital data connected to the D400 can come from:

- a single Pro16 analog input module such as the AN-16/i-M Mic Input Module
- a single Pro16e analog input module such as the AN-16/i v.2 Input Module
- a maximum of four AN-16/i v.2 Input Modules cascaded together
- one Pro16 analog input module and up to three AN-16/i v.2 Input Modules
- a single Pro16 A-Net console card
- one Pro16 console card and up to three AN-16/i v.2 Input Modules
- the A-Net Out from another A-Net Distributor

Dante Connections, D400-Dante

The Dante interface on the D400-Dante A-Net Distributor has two gigabit network ports labeled **PRIMARY** and **SECONDARY**. The Dante **SECONDARY** port can be configured to be a pass-through port or a redundant copy of the **PRIMARY** port. The D400-Dante supports sample rates of 44.1kHz and 48kHz coming from the Dante network. No sample rate converters are available on the D400-Dante.

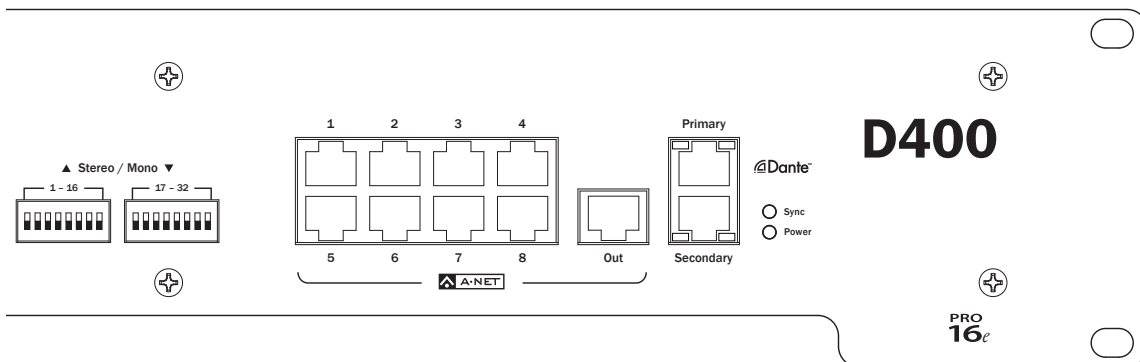

The D400-Dante has two Dante jacks, Primary and Secondary.

Dante Primary Port

Use the **PRIMARY** port on the D400-Dante as the default connection to a Dante network. The Dante RJ45 jacks include two LEDs. The yellow LED indicates an active 1GB network connection; the green LED indicates network activity.

The D400-Dante can have a maximum of 32 Dante sources assigned to it. Routing channels requires

the Dante Controller application, available from Audinate. The D400-Dante will retain its Dante channel assignments across power cycles.

For additional Dante system setup information see page 23.

Dante Secondary Port

On the D400-Dante, the Secondary port can be configured to be a redundant or daisy chain connection to the Dante network. This function is set up from within the Dante Controller application on a per-device basis. The default setting is Switched (daisy chain); the Redundant setting requires a Dante network set up with multiple managed 1GB switches. Configuring port settings requires the Dante Controller software available from the Audinate website.

A-Net Ports 1 to 8


The eight A-Net ports (labeled 1-8) on the front panel of the D400 and D400-Dante A-Net Distributors provide a copy of the digital data connected to the unit's A-Net or Dante input to the devices connected to each port. Each A-Net (1-8) port also supplies DC power that can be used to power a Personal Mixer product over the Cat-5 cable, eliminating the need for a local power supply.

✓ **NOTE:** The DC power supply in the D400 and/or D400-Dante can power only one Personal Mixer per Cat-5 cable per A-Net port.

Personal Mixing systems using more than 16 inputs always pass all network slots to all A-Net ports on the D400 and D400-Dante regardless of the type of Personal Mixer connected to the port. Legacy A-16II Personal Mixers will use network slots 1-16 only and will ignore slots 17 and above.

When using the standard D400 with up to four input devices (maximum 64 network slots), the A320 Personal Mixer uses the first 32 channels of the network and will ignore network channels 33-64. Each A640 or A360 Personal Mixer in a system can use any active network slot from 1-64. A640 channels can be mapped using the built-in mapping function. The A360's mix channel buttons can be mapped as needed using the free A360 Channel Manager software available from the Aviom website (www.Aviom.com).

When a D400-Dante is used, the A320 Personal Mixer uses the first 32 channels of the network in sequential order, while the A640/A360 can use any active network slot from 1-32 in any order by creating custom channel configurations.

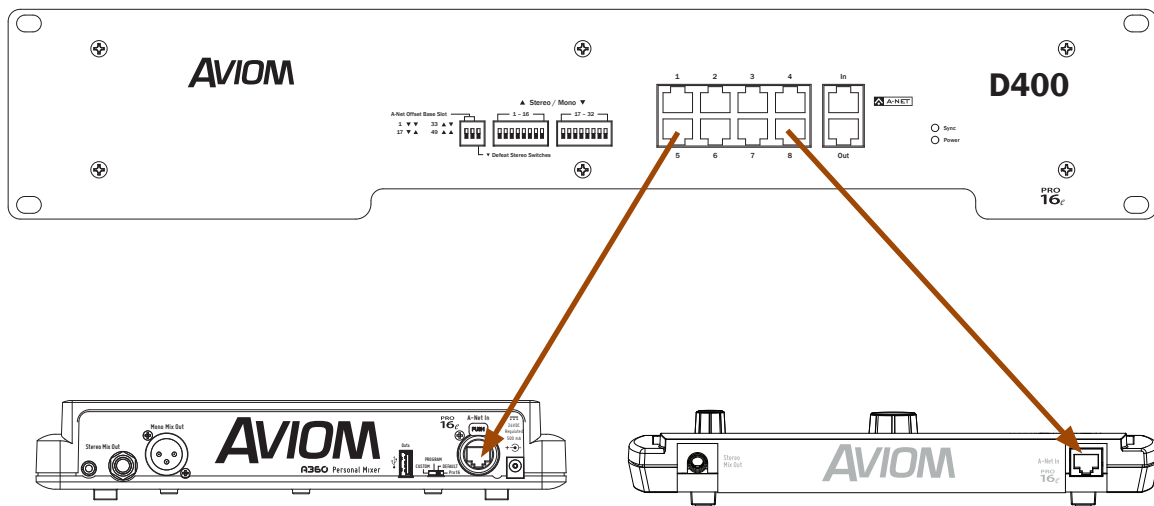

Each A-Net port can power one Personal Mixer.


Pro16 devices such as the legacy A-16II Mixer can make use of only network slots 1-16 and will ignore network slots 17-64. The A-Net Offset Base Slot DIP switches on the D400 can be used to select a different set of 16 network slots to be routed to the A-Net Out ports. Note that these switches affect all eight A-Net ports simultaneously. See page 16 for more information about using the A-Net Offset Base Slot function.

A-Net Out

The **A-NET OUT** port on the D400 and D400-Dante provides an exact copy of the distributor's digital input. It can be used to expand a system by connecting it to the **A-NET IN** port on another A-Net Distributor. Note that this is an unpowered output that carries the same data as the eight DC-powered A-Net (1-8) outputs. It can also be used to add a ninth Personal Mixer to a system, as long as the Personal Mixer is capable of using an external DC power supply.

The **A-NET OUT** port on the standard D400 always provides an exact copy of the network slots connected to its **A-NET IN** port and is not affected by the DIP switch settings for the A-Net Offset Base Slot and/or Defeat Stereo Switches features.

The following example shows an expanded system with a D400-Dante connected to a D800 and A-16D Pro A-Net Distributor.

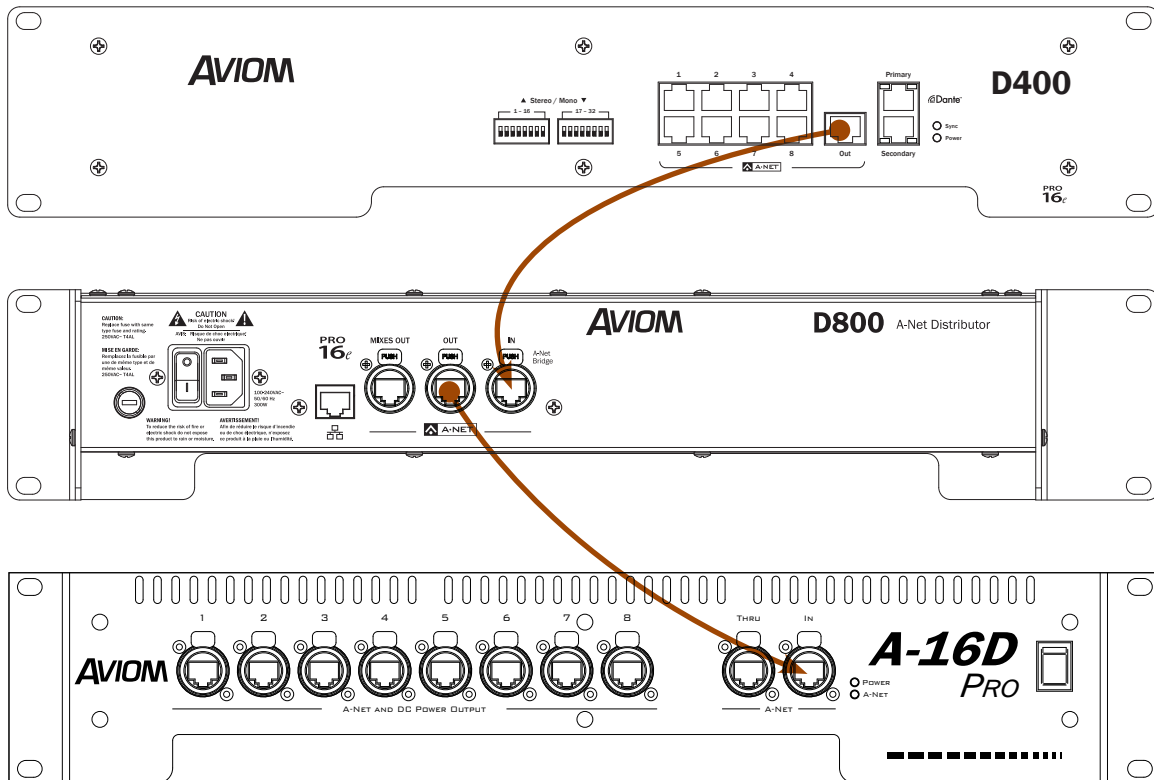

An expanded network using a D400, D800, and A-16D Pro allows up to 24 Personal Mixers to be connected.

An unlimited number of A-Net Distributors may be used to create a personal mixing system. Simply connect A-Net Out to A-Net In.

Stereo Link DIP Switches

Stereo pairs are a powerful feature that allow two channels to be accessed from a single mix channel button on the A640, A360 and A320 Personal Mixers. The two blocks of 8 DIP switches on the front panel of the D400 and D400-Dante can be used to link pairs of adjacent network channels/slots.

On the D400-Dante, the stereo links must be set up at the A-Net Distributor; stereo links are created after the incoming Dante data is converted to A-Net. Push a DIP switch to the up position to link a pair of channels. Stereo links always use an odd/even pair (1-2, 15-16, 31-32, etc.) of network slots. Changes may be made at any time; all Personal Mixers update immediately to reflect the changes.

Typically, most users will set up stereo links at the system's input device(s). On the standard version of the D400 the user has the option of creating stereo pairs at *either* the input device or on the D400 front panel. A bypass DIP switch—**DEFEAT STEREO SWITCHES**—is included that will bypass all stereo link settings on the D400's front panel. Its default position is *down* (front panel switches bypassed) assuming that the personal mixing system's input devices are providing the stereo links.

Remember that stereo links are a global setting that affects all Personal Mixers in the system.


DIP Switch Block 1

DIP Switch	Down	Up
1	Mono	Stereo Link Slots 1-2
2	Mono	Stereo Link Slots 3-4
3	Mono	Stereo Link Slots 5-6
4	Mono	Stereo Link Slots 7-8
5	Mono	Stereo Link Slots 9-10
6	Mono	Stereo Link Slots 11-12
7	Mono	Stereo Link Slots 13-14
8	Mono	Stereo Link Slots 15-16

DIP Switch Block 2

DIP Switch	Down	Up
1	Mono	Stereo Link Slots 17-18
2	Mono	Stereo Link Slots 19-20
3	Mono	Stereo Link Slots 21-22
4	Mono	Stereo Link Slots 23-24
5	Mono	Stereo Link Slots 25-26
6	Mono	Stereo Link Slots 27-28
7	Mono	Stereo Link Slots 29-30
8	Mono	Stereo Link Slots 31-32

Any combination of the Stereo Link DIP switches may be used; all Personal Mixers will update automatically to reflect the changes.

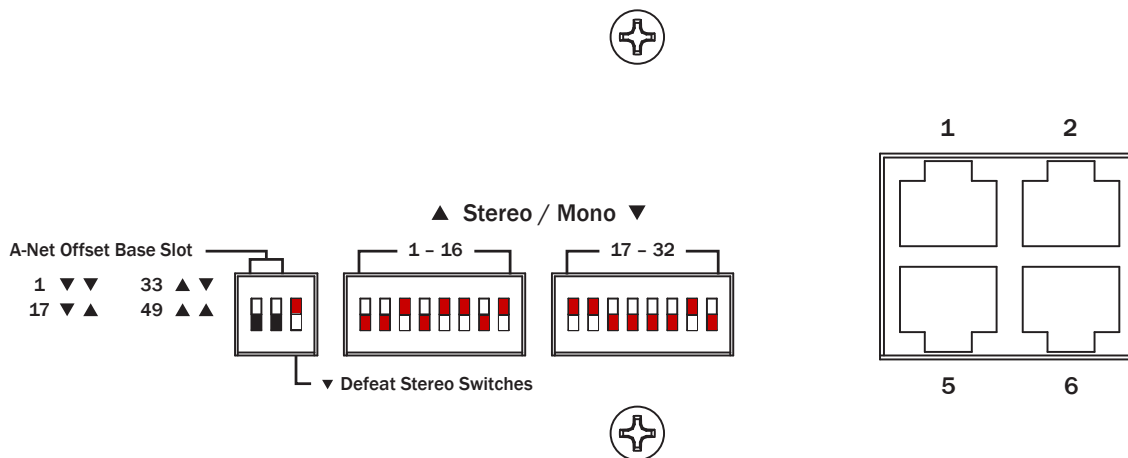

This example shows stereo links set up on the D400 for network slots 5-6, 9-10, 11-12, and 15-16 in block #1. Network slots 17-18, 19-20, and 29-30 are stereo in block #2 (switch handles are shown in red).

Any combination of the Stereo Link DIP switches may be used; in the up position, stereo links are transmitted over A-Net to all Personal Mixers in the network. Be sure to set the **DEFEAT STEREO SWITCHES** DIP Switch to the **up** position to make use of the local Stereo Link settings made with the hardware switches on the front panel of the D400.

A-Net Offset Base Slot

On the D400, the **A-NET OFFSET BASE SLOT** feature allows you to choose the starting channel to be output from the A-Net Out ports to all connected Personal Mixers. It can be used with the A640, A360 and A320, as well as legacy A-16II Personal Mixers. This feature is useful in high channel count systems (with up to 64 inputs) and/or multiple A-Net Distributors where you want to have different network slots assigned to different players in a performing ensemble. Incoming A-Net slots are rearranged before being sent to the connected Personal Mixers; the Stereo Link switches are implemented *after* the base slot selection.

The A-Net Offset Base Slot feature only applies to the eight powered A-Net (1-8) outputs on the D400; the unpowered **A-NET Out** is not affected and always passes an exact copy of all incoming A-Net data. Four settings are possible:

DIP Switch Setting	Channel Offset
▼ ▼ Down-Down	Default; Channel 1 = Mixer Button 1
▼ ▲ Down-Up	Channel 17 = Mixer Button 1
▲ ▼ Up-Down	Channel 33 = Mixer Button 1
▲ ▲ Up-Up	Channel 49 = Mixer Button 1


Channel Mapping

The following table shows how the various A-Net Offset Base Slot DIP switch settings map channels to the Personal Mixers. In this simple example all channels are mono.

Mixer Button	Network Slot - Mono			
	▼ ▼	▼ ▲	▲ ▼	▲ ▲
1	1	17	33	49
2	2	18	34	50
3	3	19	35	51
4	4	20	36	52
5	5	21	37	53
6	6	22	38	54
7	7	23	39	55
8	8	24	40	56
9	9	25	41	57
10	10	26	42	58
11	11	27	43	59
12	12	28	44	60
13	13	29	45	61
14	14	30	46	62
15	15	31	47	63
16	16	32	48	64

Up to four unique zones of 16-channel monitor mixes can be created using this feature.

This example shows a system using three D400s where each unit provides a different set of 16 A-Net slots to the Personal Mixers, creating a three-zone personal mixing system from an incoming 48-channel A-Net stream.

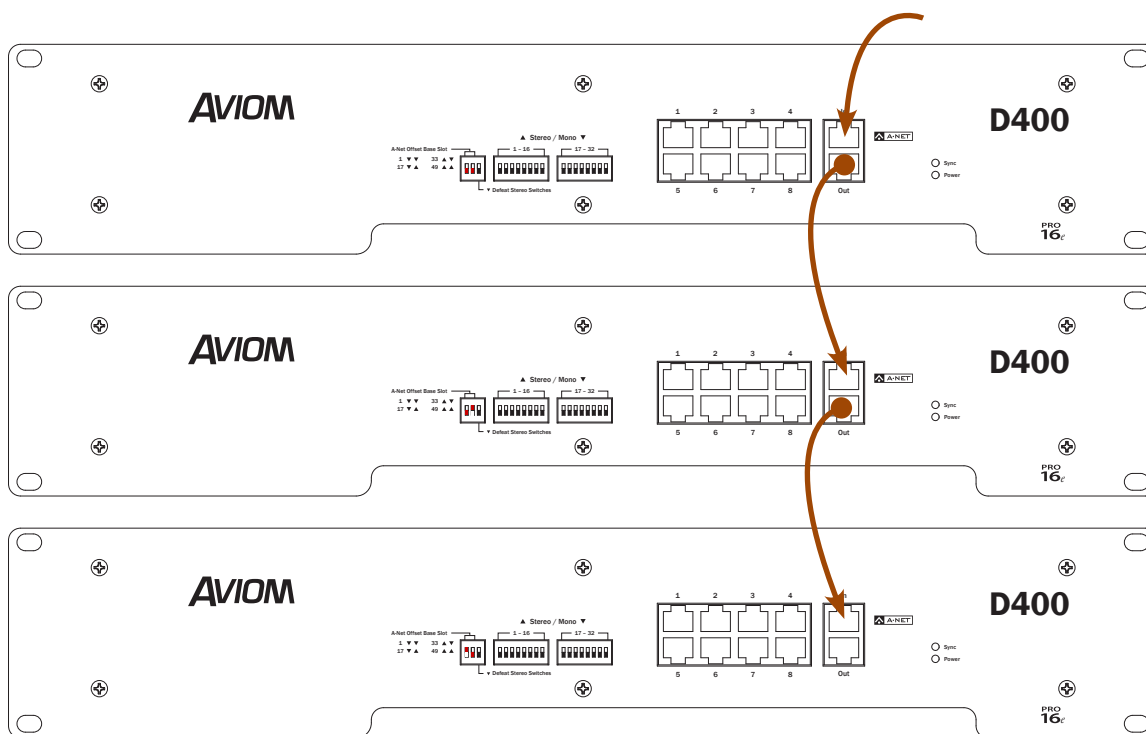

Each D400 uses a different 16-channel bank of the incoming A-Net data.

The first D400 outputs network slots 1-16 to the Personal Mixers, the second D400 outputs slots 17-32, and the third D400 is set to output slots 33-48.

Stereo Channels

This table shows how stereo channels are handled when the A-Net Offset Base Slot feature is used in a system with 32 or more input sources. Any combination of stereo and mono channels may be used when designing a personal mixing system, so it's important to understand how the stereo links affect the audio routing.

The example shows every mix channel button with a stereo channel assignment.

Mixer Button	Network Slot - Stereo			
	▼ ▼	▼ ▲	▲ ▼	▲ ▲
1	1-2	17-18	33-34	49-50
2	3-4	19-20	35-36	51-52
3	5-6	21-22	37-38	53-54
4	7-8	23-24	39-40	55-56
5	9-10	25-26	41-42	57-58
6	11-12	27-28	43-44	59-60
7	13-14	29-30	45-46	61-62
8	15-16	31-32	47-48	63-64
9	17-18	33-34	49-50	1-2
10	19-20	35-36	51-52	3-4
11	21-22	37-38	53-54	5-6
12	23-24	39-40	55-56	7-8
13	25-26	41-42	57-58	9-10
14	27-28	43-44	59-60	11-12
15	29-30	45-46	61-62	13-14
16	31-32	47-48	63-64	15-16

In the example above, when both A-Net Offset Base Slot switches are down, changing the assignment for mix channel button #6 from stereo to mono would route only slot 11 to the mix channel; slot 12 would be unused.


Sync LED

The front panel **Sync** LED lights green on the A-Net version of the D400 A-Net Distributor when a valid A-Net stream is connected to the unit's **A-Net In** port.

On the D400-Dante version of the product, the front panel **Sync** LED will light green when the unit is connected to a Dante network *and* is receiving a valid clock signal over the network.

Power LED


The red **Power** LED indicates that the D400 or D400-Dante is powered on.

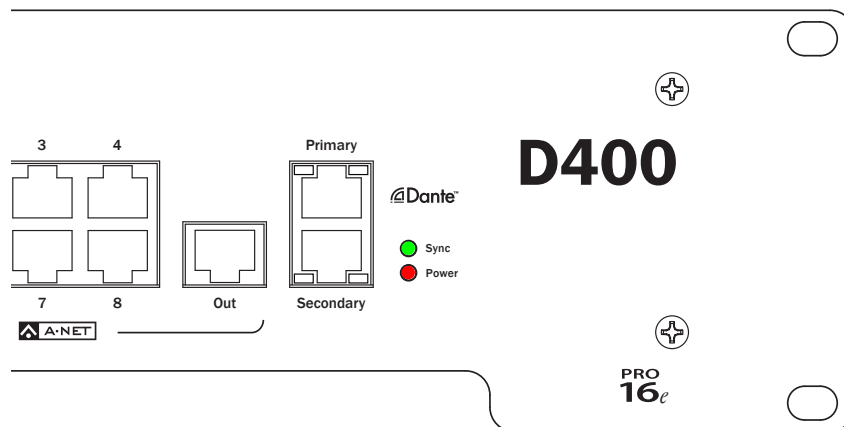

Sync (green) and **Power** (red) LEDs on the D400 and D400-Dante front panel

D400 Rear Panel


The rear panel features are found on both the standard and Dante versions of the D400.

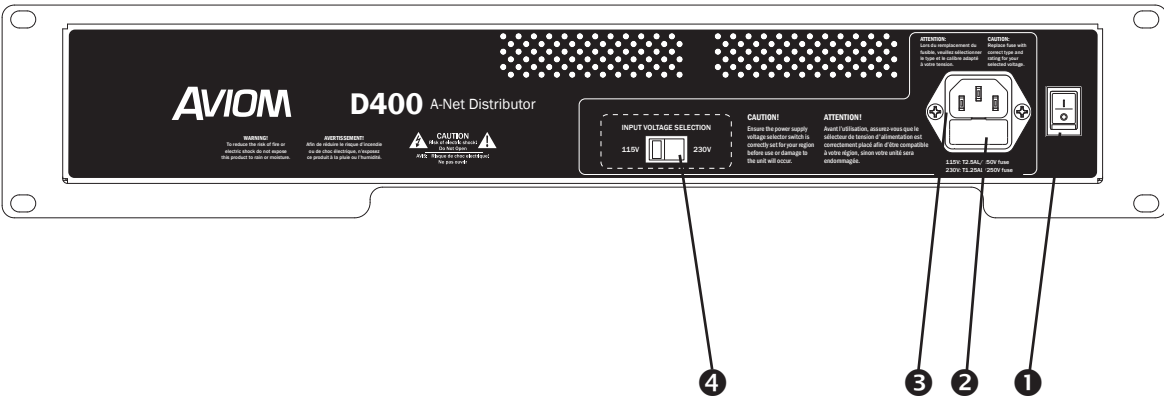

	FUNCTION
1	Power On/Off switch
2	Fuse holder
3	AC Power connection, IEC
4	Input Voltage Selection switch

Power Supply

The rear panel of the D400/D400-Dante A-Net Distributor contains a standard IEC power input for the unit. The power supply in the D400 can be set for 115V or 230V operation at rates from 50 to 60 Hz by using the red **INPUT VOLTAGE SELECTION** switch in the center of the rear panel. (See the illustration below.)

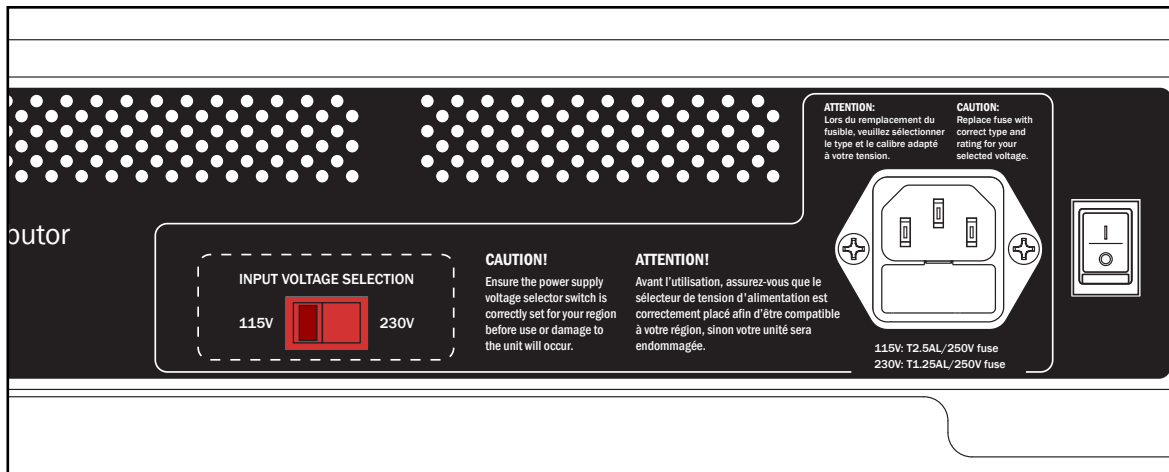


Set the D400 for the proper voltage prior to use.

CAUTION: The D400 must be set for the proper input voltage for your region before use or damage to the unit will occur.

Replaceable IEC cables for AC power systems throughout the world are available from many electronics dealers. Avoid using cable adapters whenever possible. Replacement cables must provide an earth ground connection.

Fuse

The D400's power supply fuse is contained in the IEC power connector assembly. To change a fuse, first unplug the unit from the AC wall receptacle. Remove the fuse access panel to reveal the fuse. Always replace the fuse with one of the same rating for the input voltage being used. For 115V operation use a fuse rated **T2.5AL/250V**; for 230V operation use a fuse rated **T1.25AL/250V**.

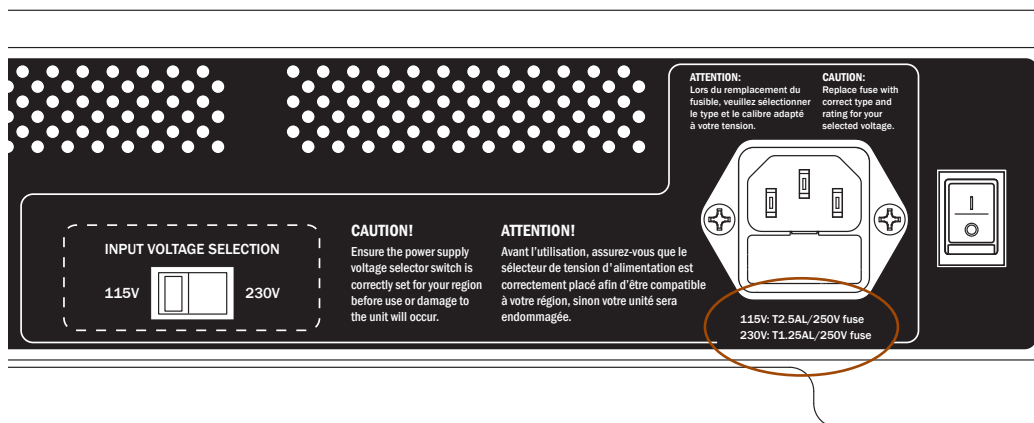


Always replace the fuse with one rated for the input voltage in use.

Dante Setup

The D400-Dante requires some additional signal routing configuration using Audinate's Dante Controller software.

Routing Channels

Any active audio resource in a Dante network may be routed to the D400-Dante A-Net Distributor. Routing channels requires the Dante Controller software, available from the Audinate website (www.audinate.com). It can be run on either Mac or PC computers. Complete documentation for the software is available from Audinate.

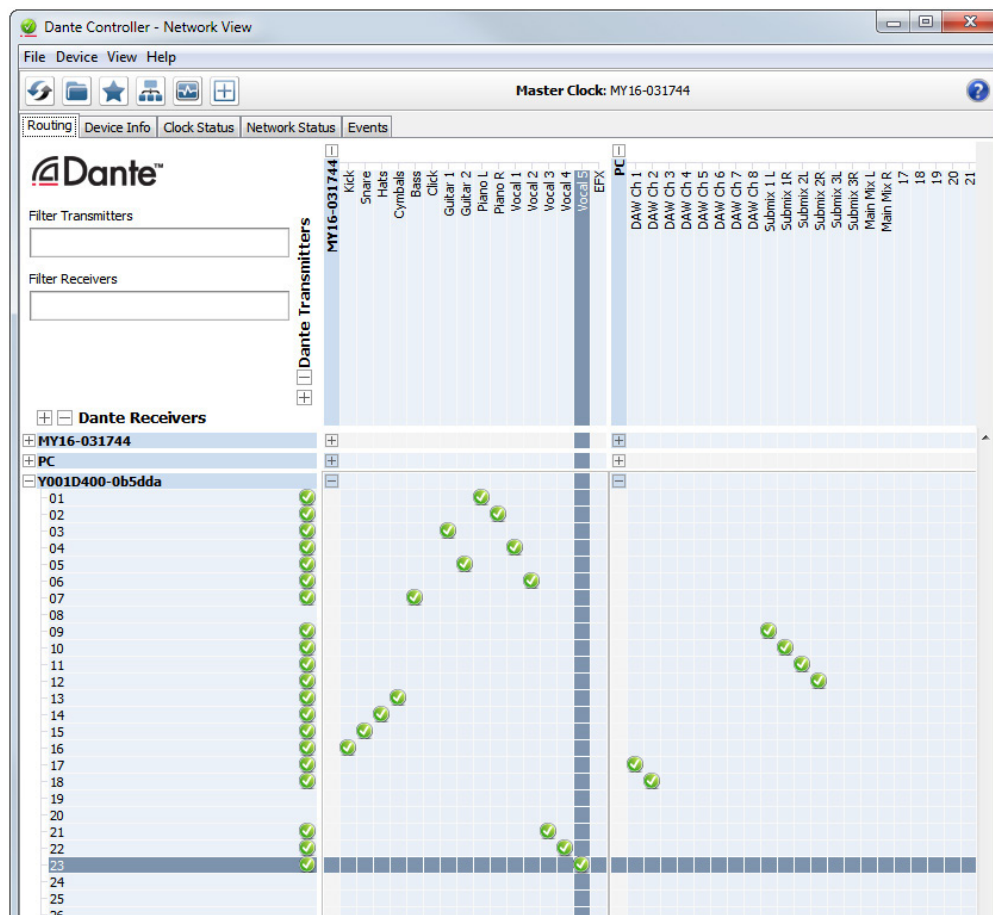

The Dante Controller routing grid is used to assign channels to any device in the network.

The main window of the Dante Controller software is essentially an X/Y grid that allows a channel from one Dante device to be routed to another. Devices that transmit are shown horizontally across the top of the grid; receiving devices are in the vertical column along the side. Open or close any device's Transmit or Receive panel by clicking the plus or minus sign (+/-) next to its name.

Use the mouse to activate or deactivate a channel by clicking in a cell. A green check mark symbol indicates a valid connection. Once channels are configured for your application, the Dante Controller software application can be closed, and the computer can be removed from the network if desired. Channel transmit/receive settings are stored within each Dante device until they are changed using the Dante Controller software. The Dante Controller software allows you to save a network-wide configuration preset which allows routings to be backed up, changed and recalled as needed.

✓ **NOTE:** Each Dante device in a network is unique, and the channel routings created using Dante Controller are saved within the Dante devices themselves. These routings will need to be recreated if any Dante device is replaced with an identical device because the original unit was removed for maintenance or repair.

Devices with built-in Dante channel routing capabilities, such as Yamaha CL and QL Series digital consoles, can assign channels to Dante devices from within the console's user interface and may not require the Dante Controller application.

Clock Status

The Network View of Dante Controller contains a Clock Status tab that displays network clock source and sync settings.


Device Name	Sync	Mute	Clock Source	Primary Status	Secondary Status	Preferred Master	Enable Sync To External
MY16-031744	☒		External Clock	Master	Link down	☒	☒
PC	☒		Dante	Slave	N/A	Slave Only	N/A
Y001D400-0b5dda	☒		Dante	Slave	N/A	☐	N/A

A Dante network always has one device designated as the Master Clock source.

You have the option of assigning one device in your Dante network to be the Preferred Master; this device will be the source of the network clock as long as the device is powered on and connected to the other devices in the network. Click the **PREFERRED MASTER** check box to assign this function to a device.

Device View


Opening the Device View for any Dante device in the network will display a tabbed view of additional settings for the device. There is an overview of the device's firmware, its transmit and receive settings, as well as settings for the sample rate and redundancy.

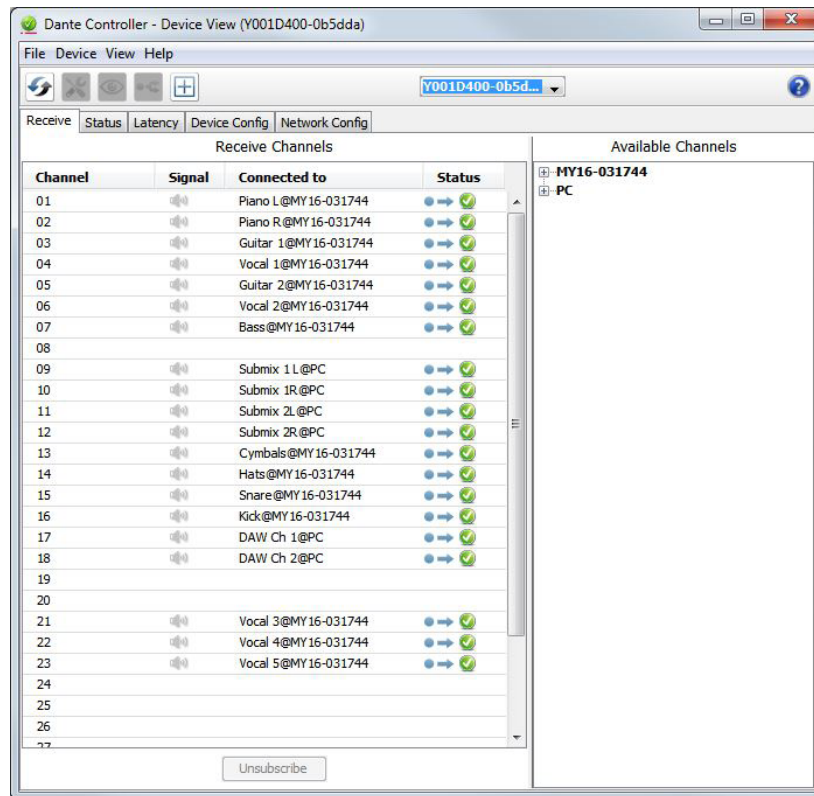

The Receive tab shows Dante channels assigned to the D400.

Status Tab

Choose the Status tab of the Device View to display the current firmware and other manufacturer-related information.

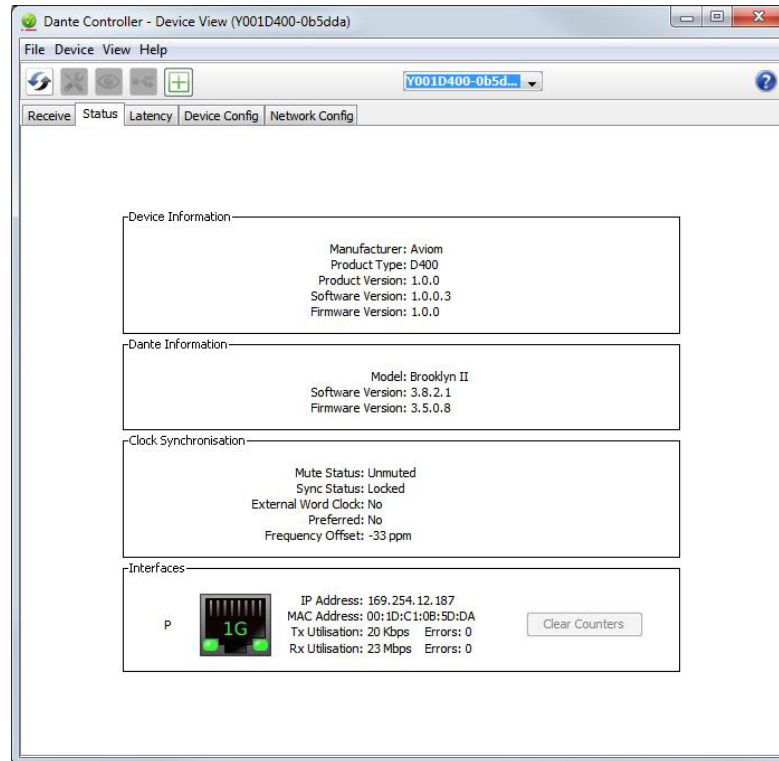

The Status view for the D400-Dante displays its current firmware as well as network connection status.

There are no user-configurable settings in the Status tab for the D400-Dante.

Device Config Tab

The settings for Sample Rate and Device Latency are found within the Device Config tab. Note that each device in a Dante network has a separate setting for Sample Rate. While it is possible to have devices with different sample rates in the same network, you cannot patch Dante channels between devices with mismatched sample rates.

The screenshot shows the 'Device Config' tab for a device named 'Y001D400'. The interface includes several sections: 'Rename Device' with a text field containing 'Y001D400'; 'Sample Rate' with a dropdown menu showing '48k', '44k', and '48k' (the first '48k' is selected), and a 'Pull-up/down' dropdown set to 'NONE'; 'Encoding' with a text field and a message 'This device does not support Encoding configuration.'; 'Device Latency' with a 'Current latency: 1.0 msec' label and a table of latency options; and 'Reset Device' with 'Reboot' and 'Clear Config' buttons.

Latency	Maximum Network Size
☐ 0.15 msec	Gigabit network with one switch
☐ 0.25 msec	Gigabit network with three switches
☐ 0.5 msec	Gigabit network with five switches
☒ 1.0 msec	Gigabit network with ten switches or gigabit network with 100Mbps leaf nodes
☐ 2.0 msec	Gigabit network with 100Mbps leaf nodes
☐ 5.0 msec	Safe value

Choose a sample rate from the drop-down menu for each network device.

To change the sample rate for the D400-Dante, select a new rate from the drop-down menu. Use the radio buttons in the Device Latency section to choose a latency value that best matches the network you have set up. The D400-Dante is compatible with sample rates of 44.1 and 48kHz. The D400-Dante does not contain sample rate converters.

Network Config Tab

The settings for the D400-Dante's Primary and Secondary ports are found within the Network Config tab of the Device View. Two settings are available in the drop-down menu. When set to **SWITCHED**, both ports are identical; Dante devices can be daisy chained. When set to **REDUNDANT**, the Secondary port will serve as a redundant copy of the data appearing at the Primary port. Note that using the Redundant setting requires that the network be configured using a pair of gigabit switches.

Receive Transmit Status Device Config Network Config

Dante Redundancy

Current: Switched

New: Switched

Switched

Redundant

Addresses

☐ Obtain an IP Address Automatically (default)

☐ Manually configure an IP Address

IP Address: . . .

Netmask: . . .

DNS Server: . . .

Gateway: . . .

This device does not support static addressing

Apply Revert

Reset Device

Reboot Clear Config

Choose either Switched or Redundant from the drop-down menu.

Refer to the Audinate Dante Controller user guide for additional information about using this software as well as setting up a redundant Dante network.


Personal Mixing Systems

A personal mixing system can be configured with a variety of input sources including analog, digital console cards, Dante network devices and Dante-enabled digital mixing consoles. Up to eight Personal Mixers (A640, A360, A320, A-16II or A-16R) can be connected per D400 or D400-Dante. This section shows some typical personal mixing system configurations.

Connecting Personal Mixers

To connect a Personal Mixer to the D400 or D400-Dante:

- Connect a Cat-5e cable from one of the eight powered A-Net ports on the A-Net Distributor to the **A-Net In** port on the Personal Mixer.
- DC power is supplied automatically to the Personal Mixer—no external DC power supply is required.
- Any combination of A640, A360, A320, A-16II and A-16R Personal Mixers may be used.

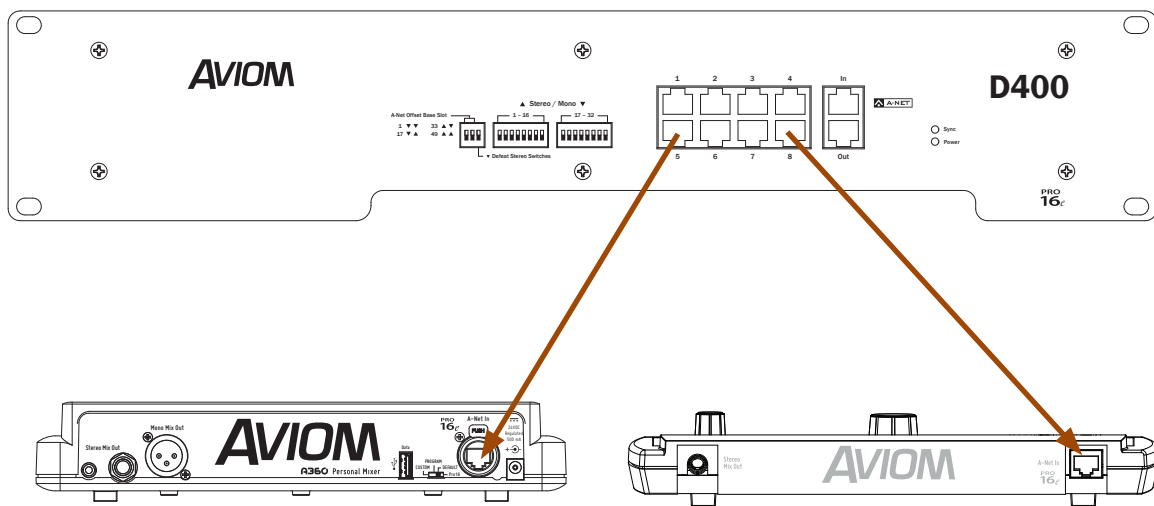

Connect an **A-Net** (1-8) port on the D400 or D400-Dante to the **A-Net In** on a Personal Mixer.

-
- ✓ **NOTE:** For connections from the D400 and D400-Dante to Personal Mixers, shielded Cat-5e (or better) cable must be used to stay below the CISPR 22 Class B, ICES-003, and FCC 47 CFR Part 15 Class B emissions limits.


Unshielded Cat-5e (or better) cable may be used on all other connections.

The A-Net outputs on the D400 and D400-Dante can be connected to any A-Net compatible device, including other A-Net distributors, allowing flexible routing and system configurations as well as virtually unlimited system expansion.

16-Channel Personal Mixing Systems


Analog Input

This system uses one D400 and a single analog input device or digital console card; 16 total network slots are available to the Personal Mixers. To configure, connect the **A-NET OUT** on the input device to **A-NET In** on the D400.

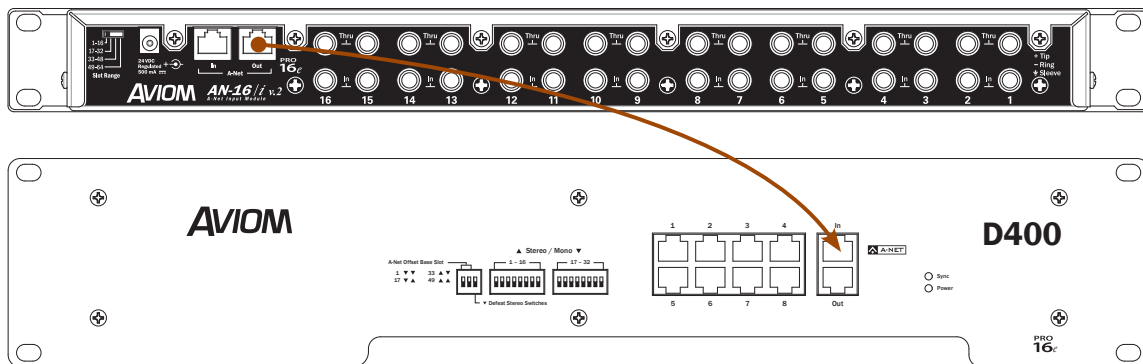

A-NET OUT on the analog input device is connected to **A-NET In** on the D400.


The **A-NET OFFSET BASE SLOT** DIP switches on the D400 should be set to the default 1-16 setting (down, down). Assign stereo links as needed. When using a single AN-16/i v.2 Input Module, be sure to set its rear panel **SLOT RANGE** switch to **1-16**.

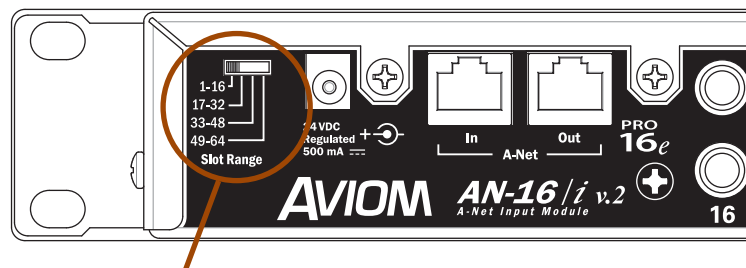

The Slot Range must be set to **1-16** for 16-channel systems.

Digital Console Card

This system uses a single console card and one D400 A-Net Distributor. A compatible Pro16 digital console card from any of Aviom's technology partners may be substituted for the Y1 Yamaha card shown in the diagram. Connect **A-Net OUT** on the console card to **A-Net IN** on the D400 with a standard Cat-5 cable.

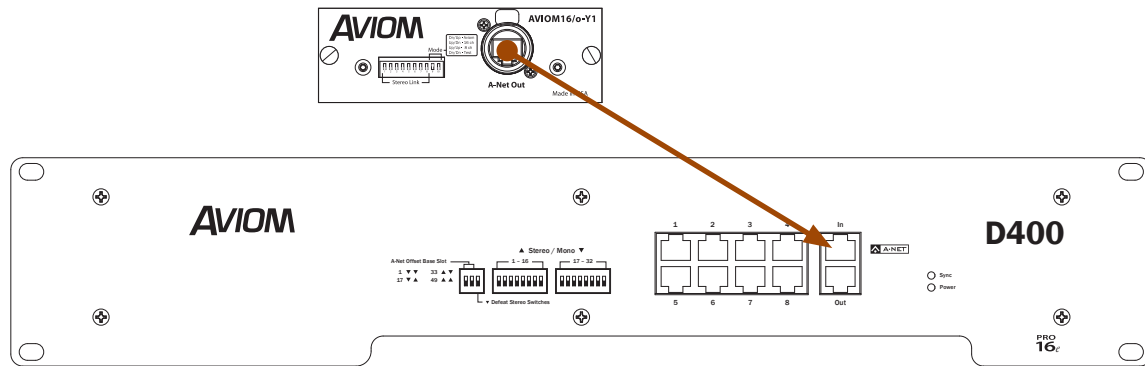


A-Net OUT from the console card is connected to **A-Net IN** on the D400.

The **A-Net OFFSET BASE SLOT** DIP switches on the D400 should be set to the default slots 1-16 setting. Assign stereo links as needed. Stereo links may be created on the console card or on the D400.

About A-Net Offset Base Slot

The A-Net Offset Base Slot DIP switches on the D400 are used to select which bank of 16 channels should be mapped onto the Personal Mixer's channel buttons. For 16-channel systems, these DIP switches should be set to Slot range 1, both switches down. Setting the DIP switches to any other range will route non-existent network channels to the Personal Mixers.

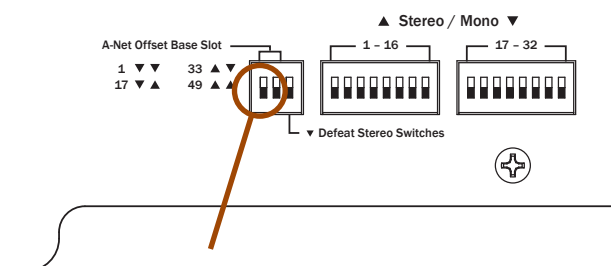

Set the Base Slot to "1" for 16-channel systems.

Stereo Links


The D400 and D400-Dante have a set of front-panel Stereo Link DIP switches that are capable of linking adjacent odd/even channel pairs in the A-Net stream. You have the option of using the stereo link switches on the network's input device (analog input module or digital console card) or on the D400. If the stereo links are set at the network's input device, set the **DEFEAT STEREO SWITCHES** DIP switch in the down position; links from the D400's front panel are ignored.

32 Channels - Analog & Digital Inputs

This hybrid system uses one digital console card plus one analog AN-16/i v.2 Input Module to provide up to 32 inputs to the network when connected to the A-Net version of the D400. The console card provides slots 1-16 of the network; the AN-16/i v.2 Input Module provides slots 17-32.

To configure this system:

- Connect **A-NET OUT** on the console card to **A-NET IN** on the AN-16/i v.2 with a Cat-5 cable.
- Set the **SLOT RANGE** switch on the AN-16/i v.2 to **17-32**.
- Connect a Cat-5 cable from **A-NET OUT** on the AN-16/i v.2 to **A-NET IN** on the D400.
- Set Stereo Links as needed on the console cards and/or AN-16/i v.2.
- Connect Personal Mixers to the D400's front panel A-Net ports.
- If desired, create custom channel maps for A640 and A360 Personal Mixers.

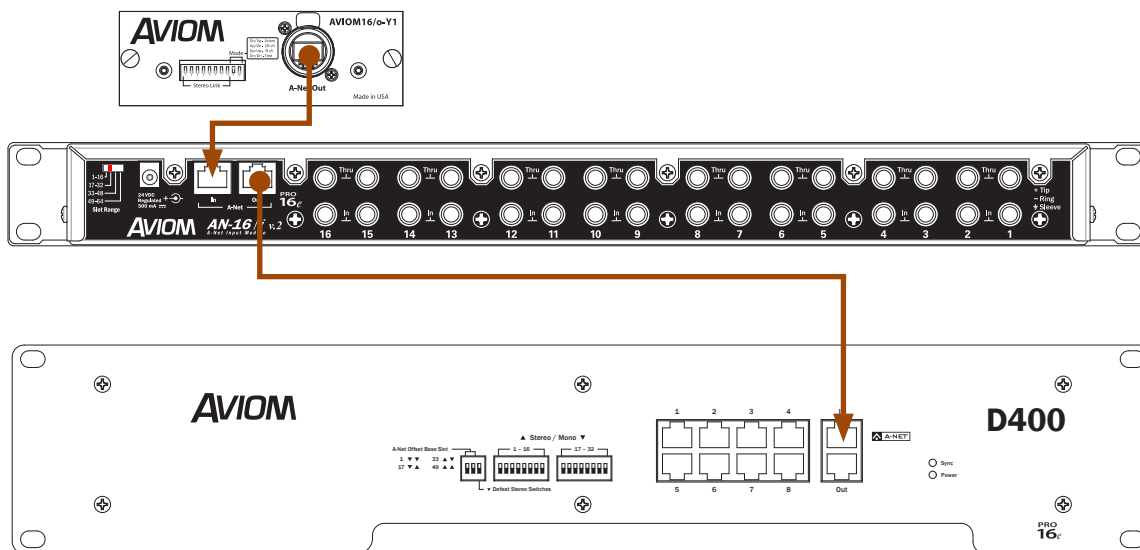

The **A-NET OUT** from the console card connects to the analog input module's **A-NET IN** port. The Pro16e **A-NET OUT** on the AN-16/i v.2 connects to **A-NET IN** on the D400.


✓ **NOTE:** If A-16II Personal Mixers will be used with A640, A360 and A320 Personal Mixers in this type of network, it is important to note that the A-16II will ignore network slots 17 and above. Make sure you assign audio sources that are critical for users of the A-16II to slots 1-16 of the network.

32-64 Channels - Analog Inputs

Up to four analog input devices may be connected to a D400 by cascading the A-Net ports on the input devices. The first input device in the system (Input Module 1 in the diagrams) can be substituted with an original AN-16/i Input Module, AN-16/i-M Mic Input Module, or a digital console card. By default these devices supply network slots 1-16.

To configure this system:

- Set the **SLOT RANGE** switch on AN-16/i v.2 Input Module #1 to **1-16** (not required if using a legacy analog input device or a console card).
- Connect **A-NET OUT** on device #1 to the **A-NET IN** on AN-16/i v.2 Input Module #2 with a Cat-5 cable.
- Set the **SLOT RANGE** switch on AN-16/i v.2 Input Module #2 to **17-32**.
- Connect **A-NET OUT** on device #2 to **A-NET IN** on AN-16/i v.2 Input Module #3.
- Set the **SLOT RANGE** switch on AN-16/i v.2 Input Module #3 to **33-48**.
- Connect **A-NET OUT** on device #3 to **A-NET IN** on AN-16/i v.2 Input Module #4.
- Set the **SLOT RANGE** switch on AN-16/i v.2 Input Module #4 to **49-64**.
- Connect **A-NET OUT** on device #4 to the **A-NET IN** on a the D400.

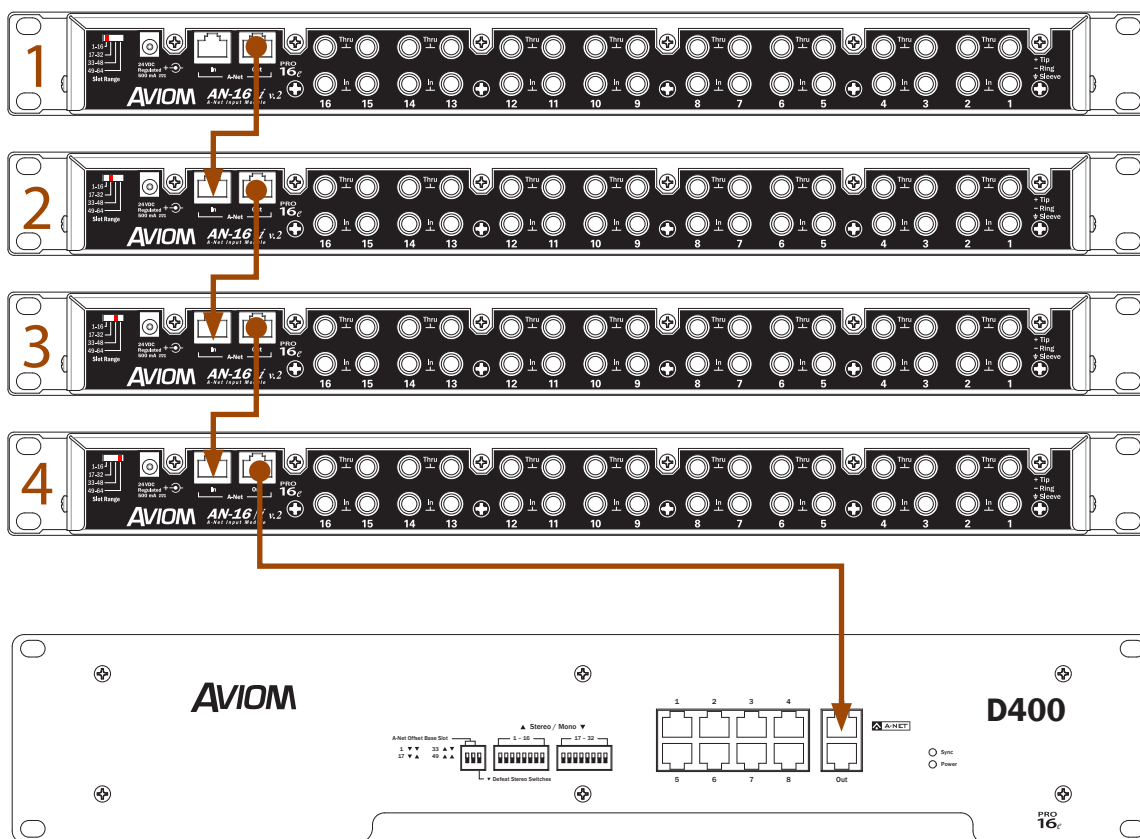

Four analog input modules create a 64-channel network.


A640 and A360 Personal Mixers can be configured to use any of the active network slots; the A320 can use only slots 1-32 and will ignore slots 33-64.

Dante Systems

A Dante-enabled mixing console or audio network can be connected to the D400-Dante to provide up to 32 channels from the Dante network to Personal Mixers.

To configure this system:

- Connect a Cat-5 cable from the Dante network to the Dante **PRIMARY** port on the D400-Dante's front panel.
- In the Dante Controller software, set the D400-Dante to operate at the same sample rate as the other devices in the Dante network (44.1 or 48kHz).
- Confirm that the D400-Dante is set for the proper Dante topology—**SWITCHED** or **REDUNDANT**—as defined by your Dante network's setup.
- Route up to 32 Dante network channels from transmitting devices to the D400-Dante using the Dante Controller software.
- Set stereo links as needed using the DIP switches on the front panel of the D400-Dante.
- Connect Personal Mixers to the front-panel A-Net ports of the D400-Dante.

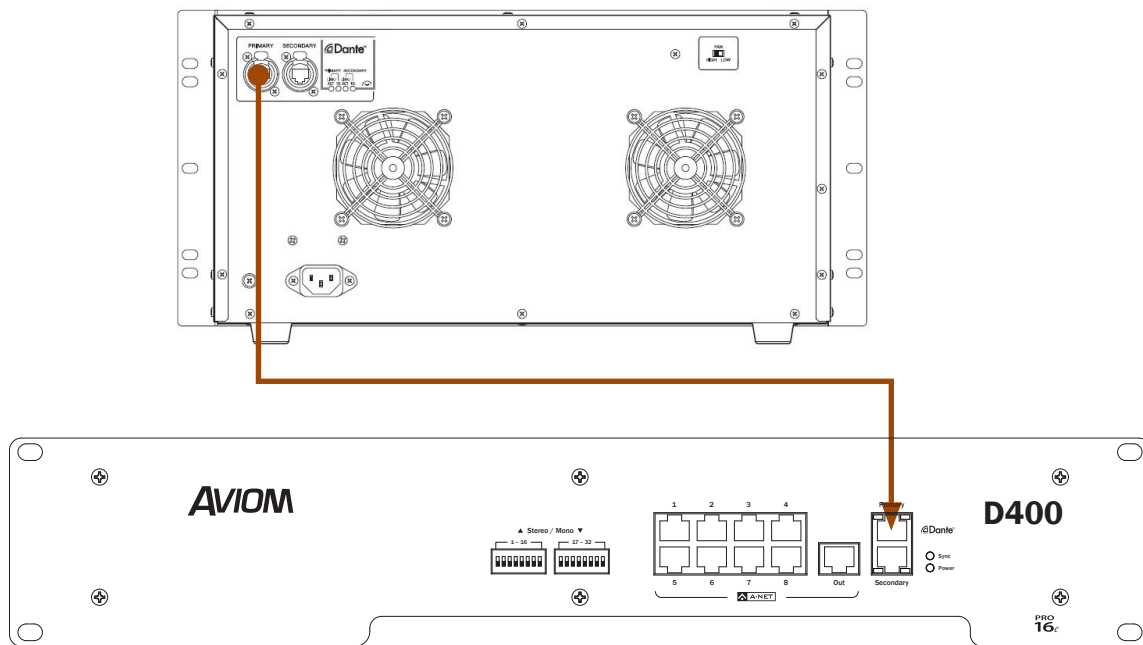

Connect a Cat-5 cable from a Dante device to the Dante **PRIMARY** port on the D400-Dante.


Additional Dante devices can be added as needed by connecting them via the **SECONDARY** port on the D400-Dante.

Expanding a Personal Mixing System

Any number of Pro16 A-Net devices can be used in a personal mixing system, including multiple A-Net Distributors. To expand a system, additional A-Net Distributors can be connected to any available **A-Net Out** port on a Pro16 device. In a Dante system, only one Dante-enabled A-Net Distributor is required; systems can then be expanded by adding non-Dante versions of the A-Net Distributor.

Using Multiple A-Net Distributors

A-Net Distributors can be cascaded. To add another D400 to a system, simply connect a standard Cat-5 cable from the **A-Net Out** of the first D400 to the **A-Net In** on the second D400. See the following diagram (the first D400 in the diagram can be a D400-Dante if the input sources are coming from a Dante network).

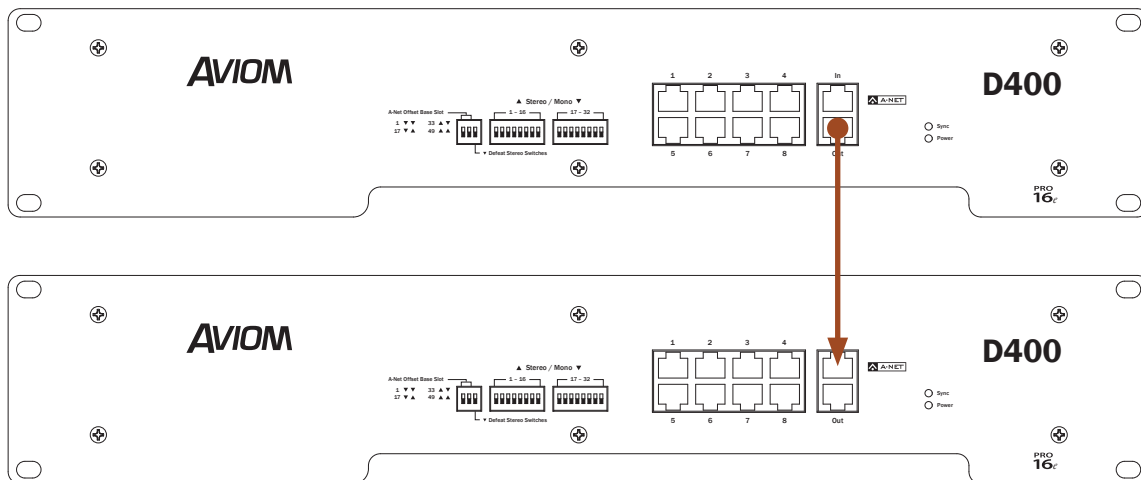


Connect **A-Net Out** on the first D400 to **A-Net In** on a second D400 to expand a system.

Two D400s connected in a daisy chain provide sixteen powered A-Net outputs. Any number of D400 A-Net Distributors can be connected to provide additional expansion by connecting the **A-Net Out** jack of one D400 to the next distributor's **A-Net In** jack. Cat-5 cables can be up to 400 feet (120 meters) long between devices.

Using the D400 With the D800 and A-16D Pro

A D800 (or D800-Dante) may be used along with an A-16D Pro A-Net Distributor in the same system. Connecting a D400 and/or an A-16D Pro after a D800 allows up to 64 network slots to be transmitted to every port on each A-Net Distributor; use this as the default patching method if you are using A320 and A360 Personal Mixers. Up to 64 inputs may be made active in the network by using analog input devices, console cards connected to an SB4 System Bridge and D800, or a Dante network.

To connect a D800 A-Net Distributor to a D400 and an A-16D Pro A-Net Distributor, patch a Cat-5 cable from the **A-Net Out** port on the D800 or D800-Dante's rear panel to the **A-Net In** on the front panel of the D400. Patch another cable from **A-Net Out** on the D400 to **A-Net In** on the A-16D Pro A-Net Distributor.

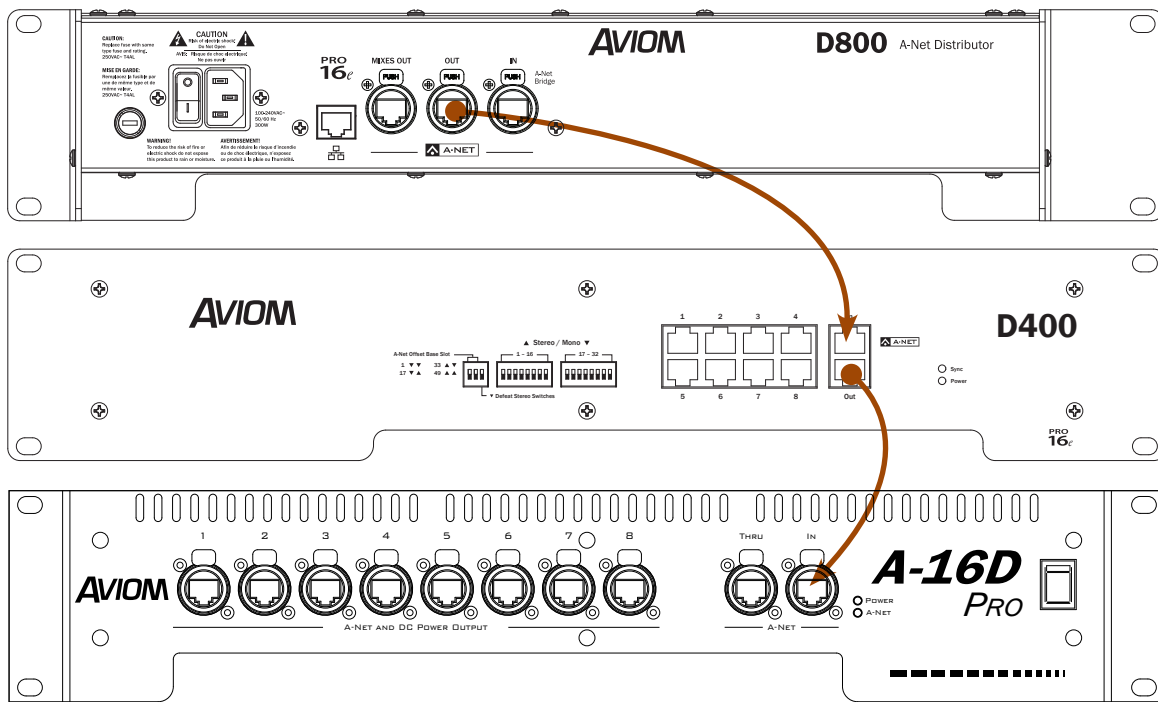

Connect **A-Net Out** to **A-Net In** to expand a network.

All network slots (up to 64) are available at each of the A-Net Distributor's outputs. Connect Personal Mixers as needed. The legacy A-16II and A-16R Personal Mixers will use network slots 1-16 only and will ignore slots 17-64. A320 Personal Mixers will use slots 1-32 of the network, ignoring slots 33-64. The A-Net Offset Base Slot DIP switches can be used to select specific content ranges to be used by A320 and/or A-16II Personal Mixers.

A640 and A360 Personal Mixers can make use of any active slot. Any A640 or A360 Personal Mixers connected to a D400 or A-16D Pro cannot use the Network Mix Back feature; which requires the D800 A-Net Distributor.

Expand the system further with another A-16D Pro by connecting **A-Net Thru** on the first A-16D Pro to **A-Net In** on the second.

✓ **NOTE:** The half-rackspace A-16D A-Net Distributor may be substituted for the A-16D Pro.

D400 and D400-Dante A-Net Distributor Specifications

Common Specifications

A-Net Out to Personal Mixers	Eight RJ45 connectors, powered
A-Net Out	Pro16e A-Net; RJ45 connector, unpowered
LEDs	Power On (red); Network Sync (green)
Stereo Link	Two 8-position DIP switch blocks (1-16, 17-32)
A-Net Cables	Personal Mixer Connections: Shielded Cat-5e (or better) cable must be used to stay below the CISPR 22 Class B, ICES-003, and FCC 47 CFR Part 15 Class B emissions limits. Unshielded Cat-5e cable may be used on all other connections.
Output Voltage for Personal Mixers	24VDC, 0.5 amp Transmitted over the Cat-5e cable
Power Supply	Internal, IEC connector
Input Voltage	100-120 VAC or 200-240 VAC (with selector switch); 50-60Hz @220 W max
AC Fuse Types	115V range: T2.5AL/250V 230V range: T1.25AL/250V
Dimensions	19" (482.6 mm) wide x 7.386" (187.6 mm) deep; 2U, 3.5" (88.9 mm) high
Weight	12.0 lbs (5.44 kg)




D400 A-Net Distributor Specifications

A-Net Input	Pro16 or Pro16e A-Net; RJ45 connector
A-Net Offset Base Slot	2-position DIP switches select the starting channel that Personal Mixers will receive from the network (1, 17, 33, or 49)
Defeat Stereo Switches	Chooses between local (front panel) stereo links (up) or network stereo links (down)

D400-Dante A-Net Distributor Specifications

Dante Interface	32 channels (44.1/48kHz Sample Rate)
Dante Primary I/O	RJ45 connector
Dante Secondary I/O	RJ45 connector
Dante LEDs	Network Activity (green); 1GB Network Connection Active (yellow)

Dimensions

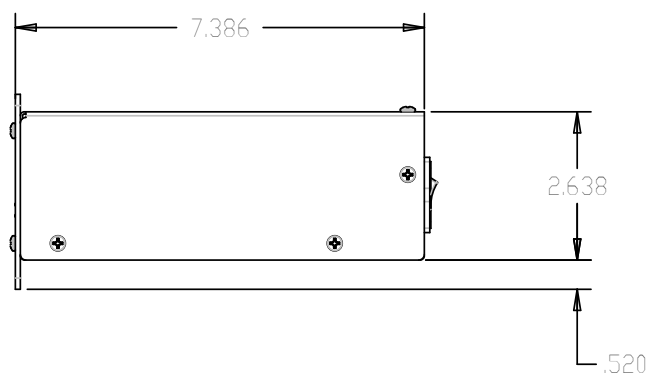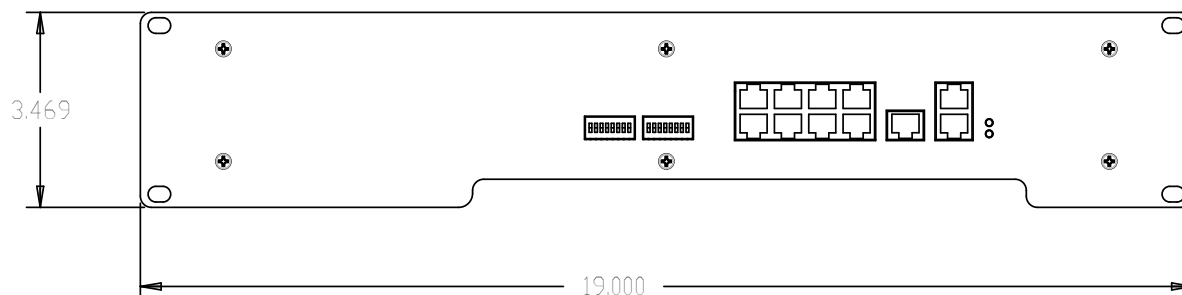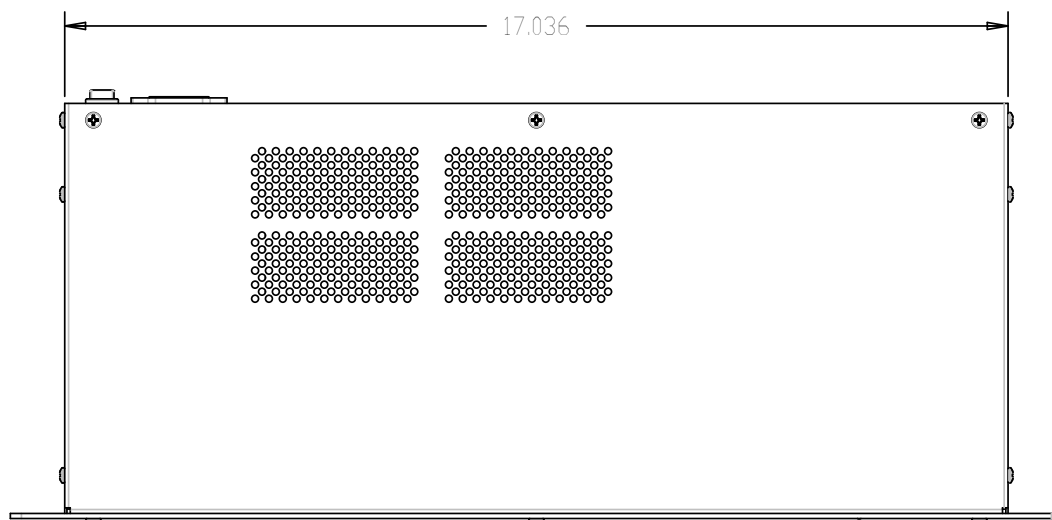

Cat-5 Cable Pinout

The tables below detail the two wiring pinout variations for Cat-5 cables. When making custom cables, either pinout can be used, but both ends of a cable must use the same wiring pattern.

T568A

RJ45 Pin	Wire Color	
1	White/Green	
2	Green	
3	White/Orange	
4	Blue	
5	White/Blue	
6	Orange	
7	White/Brown	
8	Brown	

T568B

RJ45 Pin	Wire Color	
1	White/Orange	
2	Orange	
3	White/Green	
4	Blue	
5	White/Blue	
6	Green	
7	White/Brown	
8	Brown	

Index

Symbols

16-Channel Personal Mixing System 30
32-Channel Personal Mixing System 32
64-Channel Personal Mixing System 33
115V operation 22
230V operation 22

A

A-16D A-Net Distributor 2, 36
A-16D Pro A-Net Distributor 2, 4, 13, 36
A-16II Personal Mixer 4, 12, 13, 29, 36
A-16R Personal Mixer 4, 36
A320 Personal Mixer 2, 8, 12, 29, 32, 33, 36
A360 Channel Manager 12, 29
A360 Personal Mixer 2, 3, 8, 12, 8, 29, 32, 33
A640 Personal Mixer 3, 8, 12, 14, 32, 36
AC Line Conditioning 7
AN-16/i Input Module 4, 33
AN-16/i-M Mic Input Module 4, 6, 11, 33
AN-16/i v.2 Input Module 4, 6, 11, 30, 32
AN-16/o v.4 Output Module 4, 6
Analog Input 30, 33
A-Net 3
A-Net Distributor 2, 4, 29
A-Net In 4, 9, 11, 20, 30, 31, 32
A-Net In port 6, 11, 29, 36
A-Net Input 38
A-Net Offset Base Slot 9, 13, 16, 19, 30, 31, 38
A-Net Out 9, 10, 11, 30, 31, 32, 37
A-Net Out port 6, 11, 13, 36
A-Net Ports 12
A-Net Thru 36
Apple iv
Audinate 12, 23, 28
Aviom16/o-Y1 A-Net Card 4
AV-M8 Mic Input Module 4

B

Base Slot 9, 13, 16, 30, 31, 38
bypass stereo links 14

C

Cable Length 6, 35
 Pro16e 6
Cables 5
Cat-5 5
 shielded 37
Cat-5 Cable Pinout 5, 40
Cat-5e 29, 30
 5
 shielded 5
 UTP 5
Cat-5e cable
 solid v. stranded 6
Cat-6 2, 5
Cat-6e 5
Certifications iv
change the sample rate 27
Channel assignment 19
Channel Map 31
 A360 12, 32
Channel Offset 16
channel pair 31
Channel routing 23
Cleaning and Maintenance 7
clock 20
Clock Status 24
Compatibility 4, 6, 30
configuration preset 24
Connecting Personal Mixers 29
console card 4, 11, 31, 32, 33, 36
crossover cables 5

D

D400-Dante Front Panel 10
D400 Front Panel 9
D800 A-Net Distributor 2, 3, 13, 36
D800-Dante A-Net Distributor 4
daisy chain 12
daisy chain Dante 28
Dante 8
Dante Controller 3, 12, 23, 24, 28, 34
Dante LEDs 38
Dante Primary 10, 11, 34, 38

Dante routing 24
Dante Secondary 10, 12, 34, 38
Dante Setup 23
DC power 8, 9, 10, 12, 29
Default 16
default setting 30
Defeat Stereo Links 9, 13
Defeat Stereo Switches 14, 16, 38
Device Config Tab 27
Device Latency 27
Device View 25, 28
digital console 24
digital console card 11
Dimensions 37, 39
DIP switch 9, 10, 13, 14, 16, 30, 31
DIP Switch Block 1 15
DIP Switch Setting 16
Direct Output 11

E

earth ground 22
emissions limits 30
Ethernet 3
Expanding a System 13, 35

F

firmware 25, 26
Front Panel 9, 10
front panel Sync LED 20
Fuse 22, 37
Fuse holder 21

G

gigabit network 11
gigabit switch 12, 28
green LED 11

I

IEC 21, 22, 37
IEC power input 21
inline coupler 6
Input Module 4
Input Voltage 22, 37
Input Voltage Selection 21

L

Latency 27
LED 9, 10, 37
LED Indicators 20
Local Area Network 3

M

map channels 17
maximum cable length 7
Mixing System 29
Mono 15

N

Network Config Tab 28
Network Mix Back 36
Network Slot 12, 19, 30
Network View 24

O

Offset 38
Offset Base Slot 16
Operating Temperature iii
Output Voltage 37

P

Package Contents 3
patch Dante channels 27
permanent installation 5
Personal Mixer 29, 31, 32, 34, 36
Personal Mixing System 29
Pinout 5, 40
Power connection 21
Power LED 9, 10, 20
Power On 37
Power Supply 12, 29, 37
Preferred Master 24
preset
 Dante 24
Primary 10, 11
Primary port 28, 34
Pro16 3
Pro16e 3
 cable length 6
Pro16e A-Net 8

R

Rear Panel 21
Receive 24
red LED 20
Redundant 12, 25, 28, 34
RJ45 5, 37
Routing Dante Channels 23, 24

S

Sample Rate 11, 25, 27, 34, 38
sample rate converter 11, 27
SB4 System Bridge 4, 6, 36
Secondary 10, 11, 12, 34
Secondary port 28
Shielded Cat-5e iv, 5, 30, 37
Slot 2, 13, 30, 32, 36
Slot Range switch 32, 33
 AN-16/i v.2 30
solid v. stranded Cat-5 6
Specifications 37
Status Tab 26
Stereo Channel 19
Stereo Link 9, 14, 15, 19, 31, 32, 34, 37
 bypass 14
Stereo Link DIP switch 10, 15, 16
surge protection 7
Switched 12, 28, 34
Sync 37
Sync LED 9, 10, 20
 front panel 20
System Bridge 6
system expansion 30

T

T568A pinout 40
T568B pinout 40
Thru 36
Trademarks iv
Transmit 24

U

Unshielded Cat-5e 5, 30, 37
UPS 7

V

Voltage 22, 37
Voltage Selection 21

W

Warranty Registration 3

Y

Y1 A-Net Card for Yamaha 4, 31
Yamaha 31
Yamaha console 24
yellow LED 11

Z

zone 17

Warranty Registration

Please take a moment to fill in this warranty registration form.

Return it to Aviom via mail or fax. All information will be kept confidential.

Model _____	Product Serial Number _____
Model _____	Product Serial Number _____
Model _____	Product Serial Number _____
Model _____	Product Serial Number _____

Date Purchased _____

Dealer Name _____

Dealer Location _____

Your Name _____

Address _____

Address _____

City _____

State/Province _____

Zip/Postal Code _____

Country _____

Email Address _____

Fax this form to Aviom at +1 610-738-9950



1157 Phoenixville Pike, Suite 201 • West Chester, PA 19380 USA
Voice: +1 610.738.9005 • Fax: +1 610.738.9950 • www.Aviom.com